
BERLIN

CREATUFT
CREATIVE WOOL FLOORING

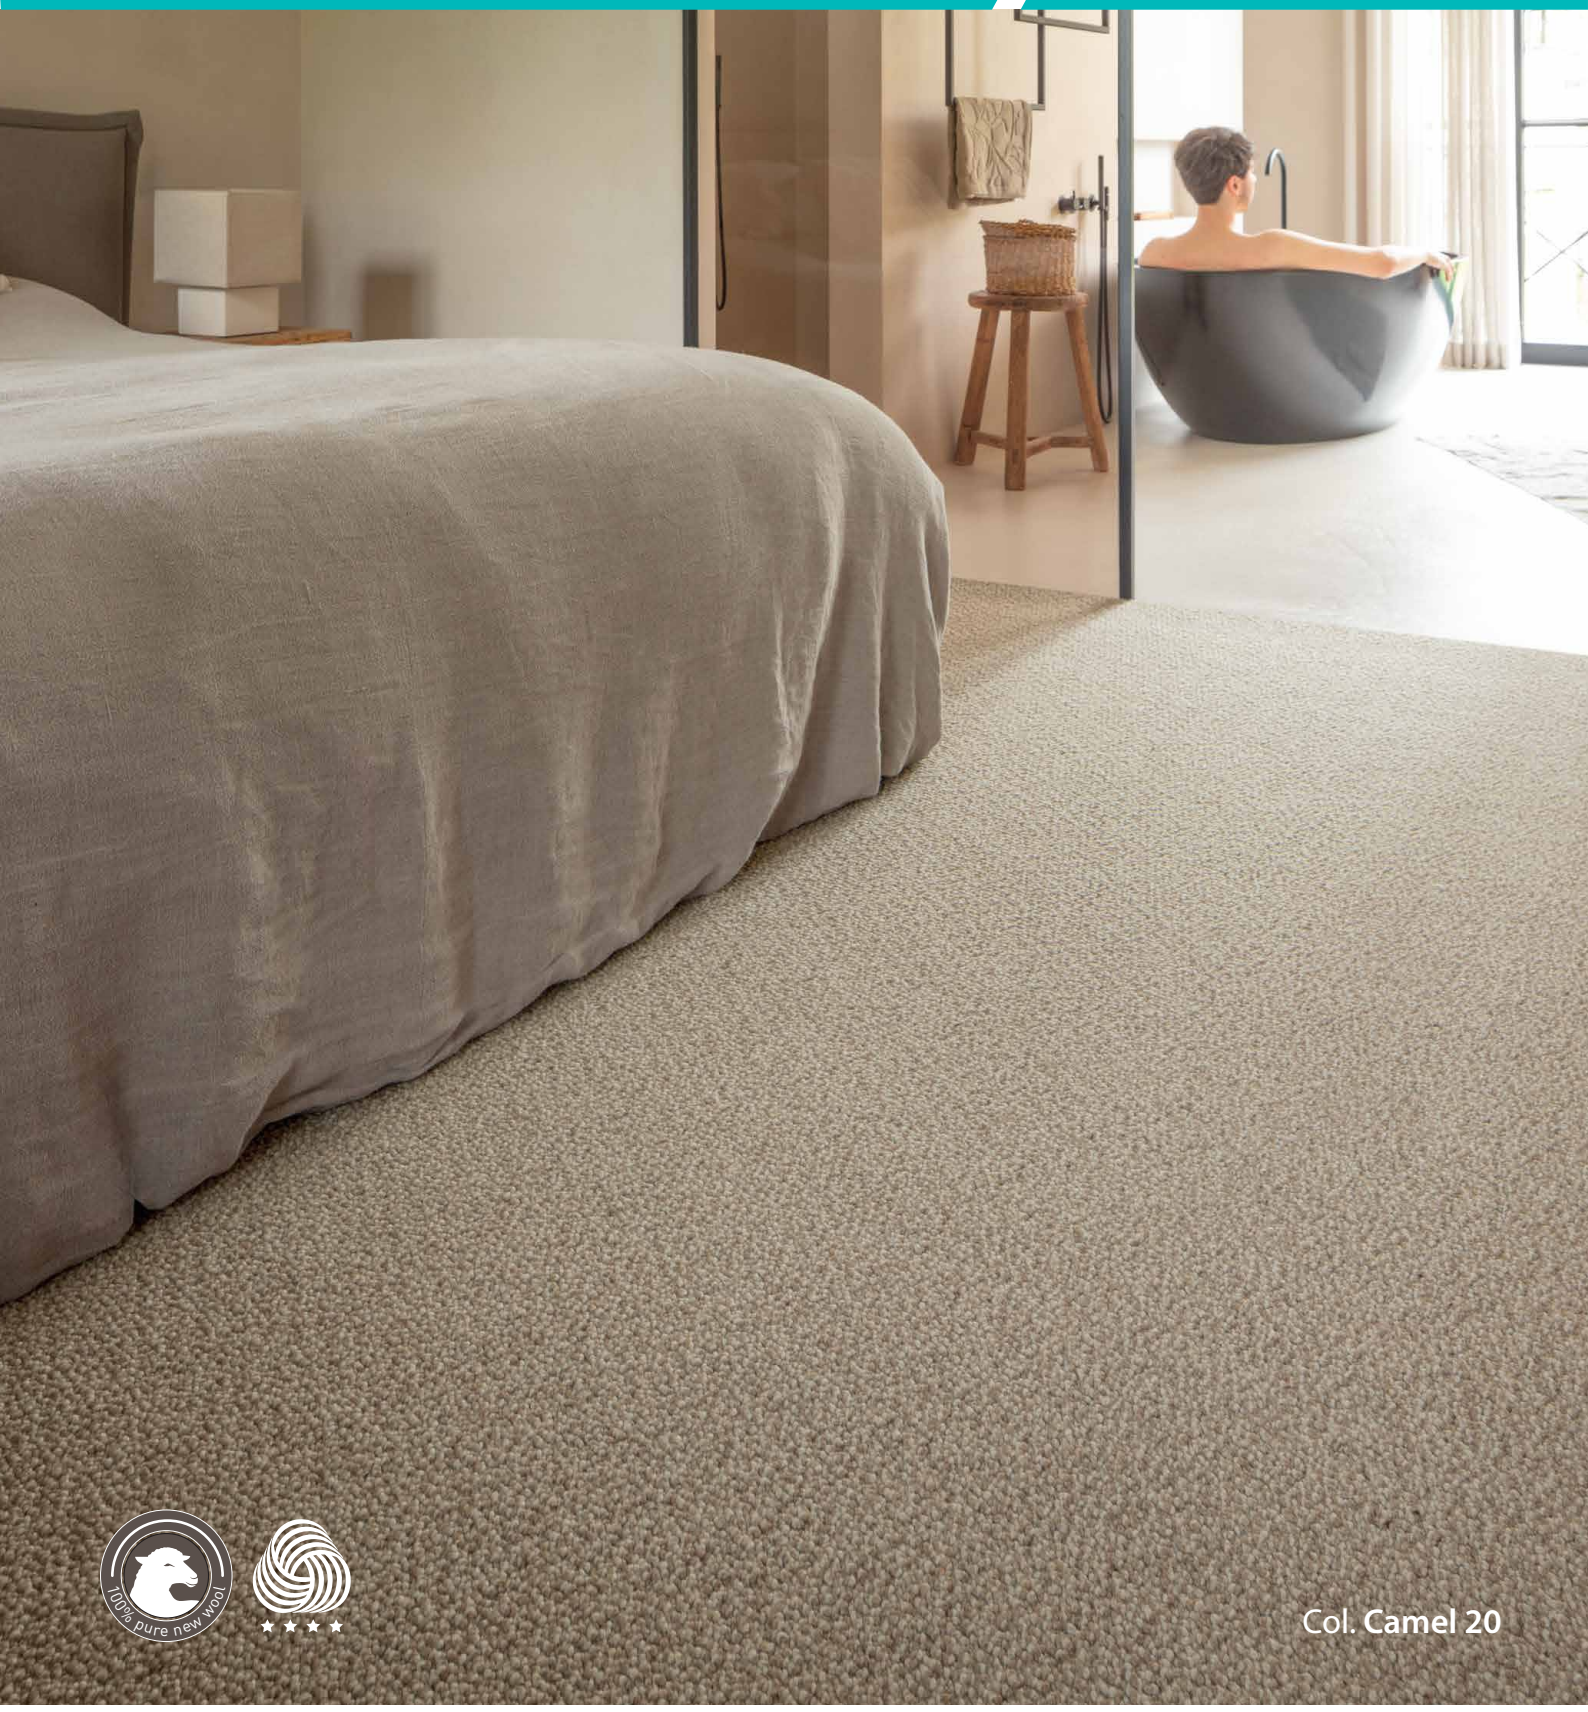


Col. **Camel 20**

Made In Belgium

BERLIN



Cashmere 10

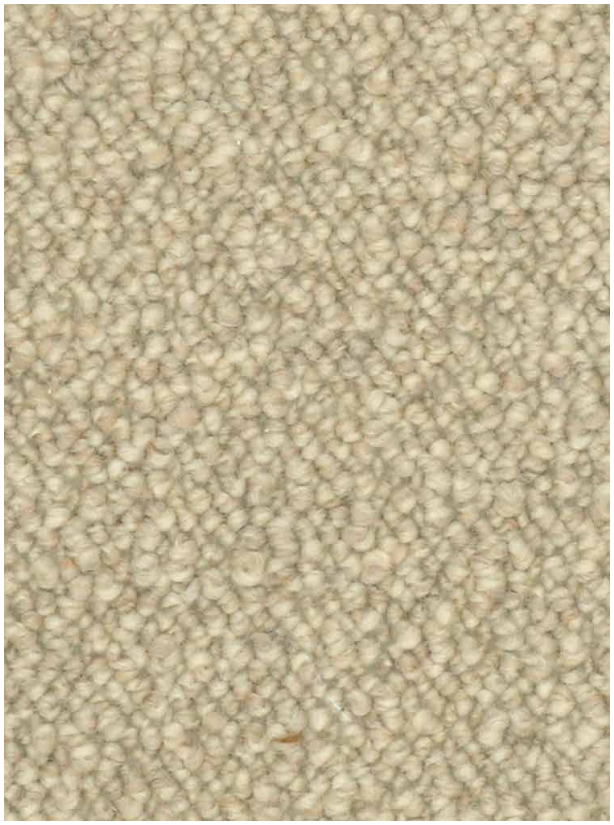

Llama 107




Camel 20



Dune 276

BERLIN

CREATUFT
CREATIVE WOOL FLOORING

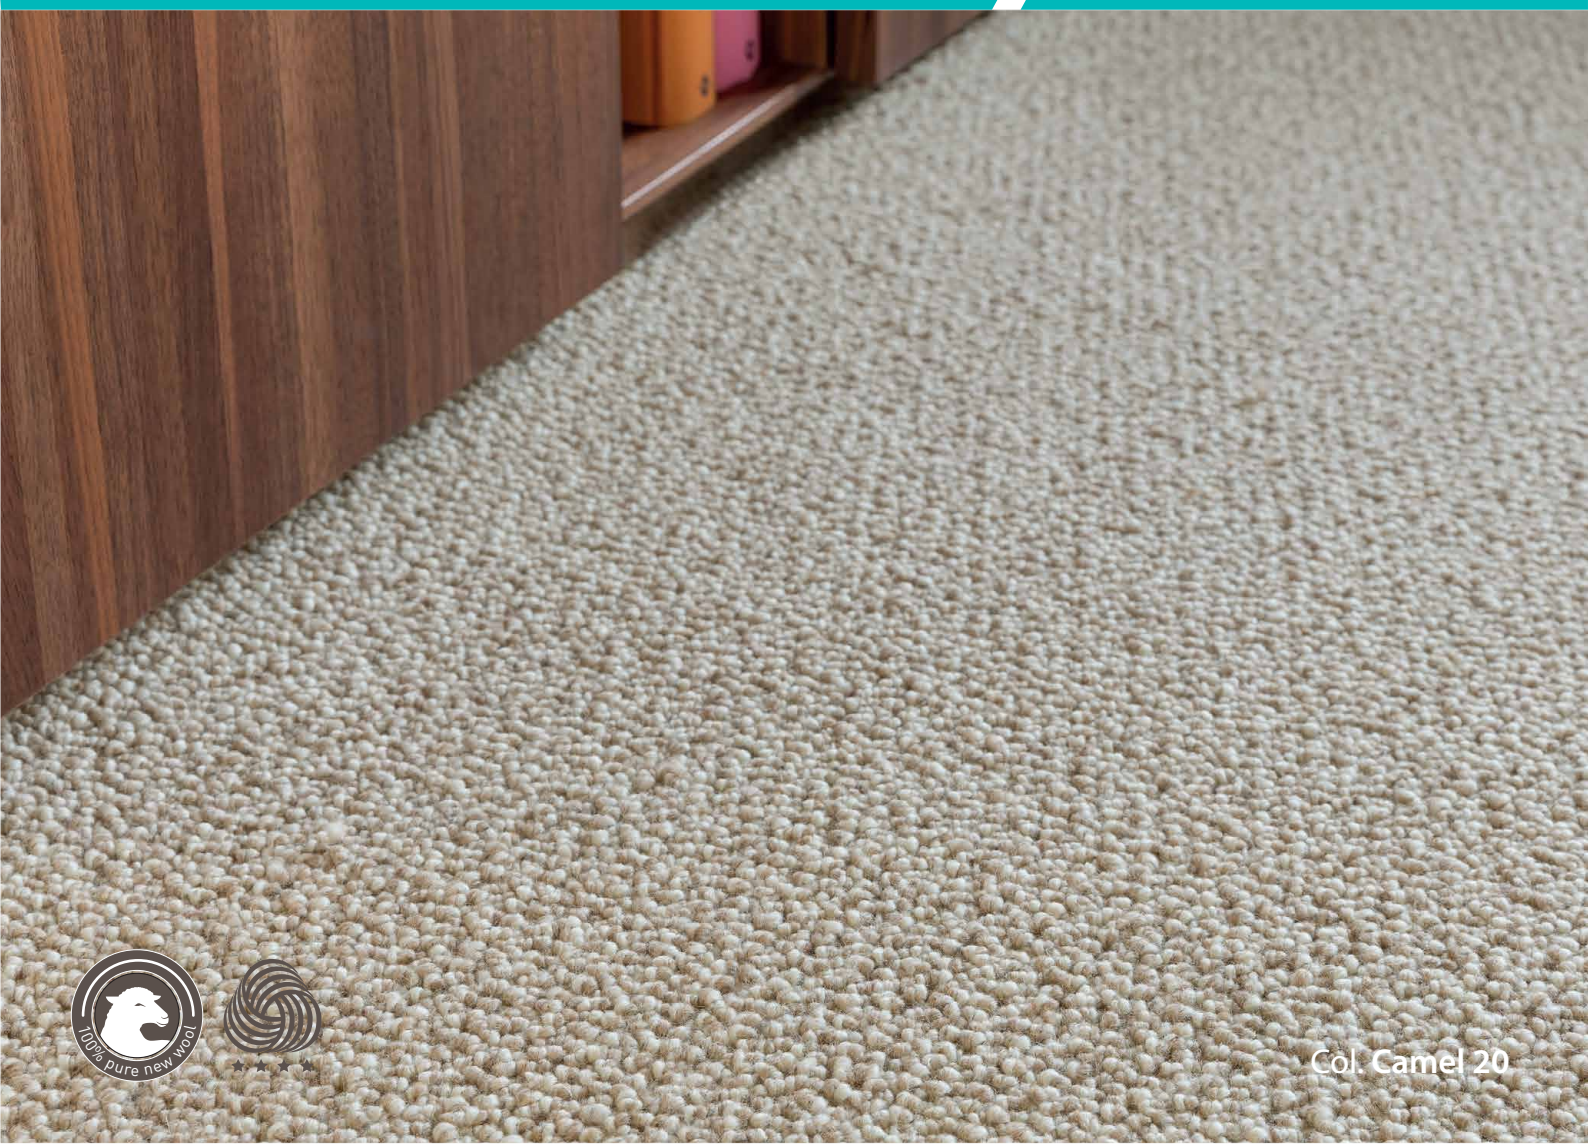

SPECIFICATION

Manufacturing Process	Tufted, 1/4" Structured Loop Pile, 2-Plied Yarn
Pile Composition	100% Pure New Wool
Primary Backing	100% PP
Secondary Backing	Jute
Pile Height	6 mm
Total Height	8 mm
Tuft Density	41,000 /m²
Pile Weight	1300 g/m²
Total Weight	2450 g/m²
Width	ca. 400 cm
Resistance of Heat Conduction	ISO 8302 0,14 m² K/W (theoretically) Tog rating 1,4
Suitability	Domestic : Heavy Duty
	Contract : General Duty
Sound Absorption	28db (theoretical)
Fire Resistance	Cfl-s1

EN 14041
DOP: 1020-113880
NB: 0493
07
CE
G Cfl-s1 NCS
≥0,30
DL PCP
NA HCHO
λ23
FOR USE AS FLOOR COVERING IN BUILDINGS.
Creatuft NV
Industrielaan 16
Belgium - 8520 Kuurne

TESTED FOR A BETTER LIVING ENVIRONMENT
GUT
21187EAD
www.gut-prodis.eu

Made In Belgium