


CORAL REEF

SDN Carpet Tile 50cm x 50cm




Scroll Loop Carpet




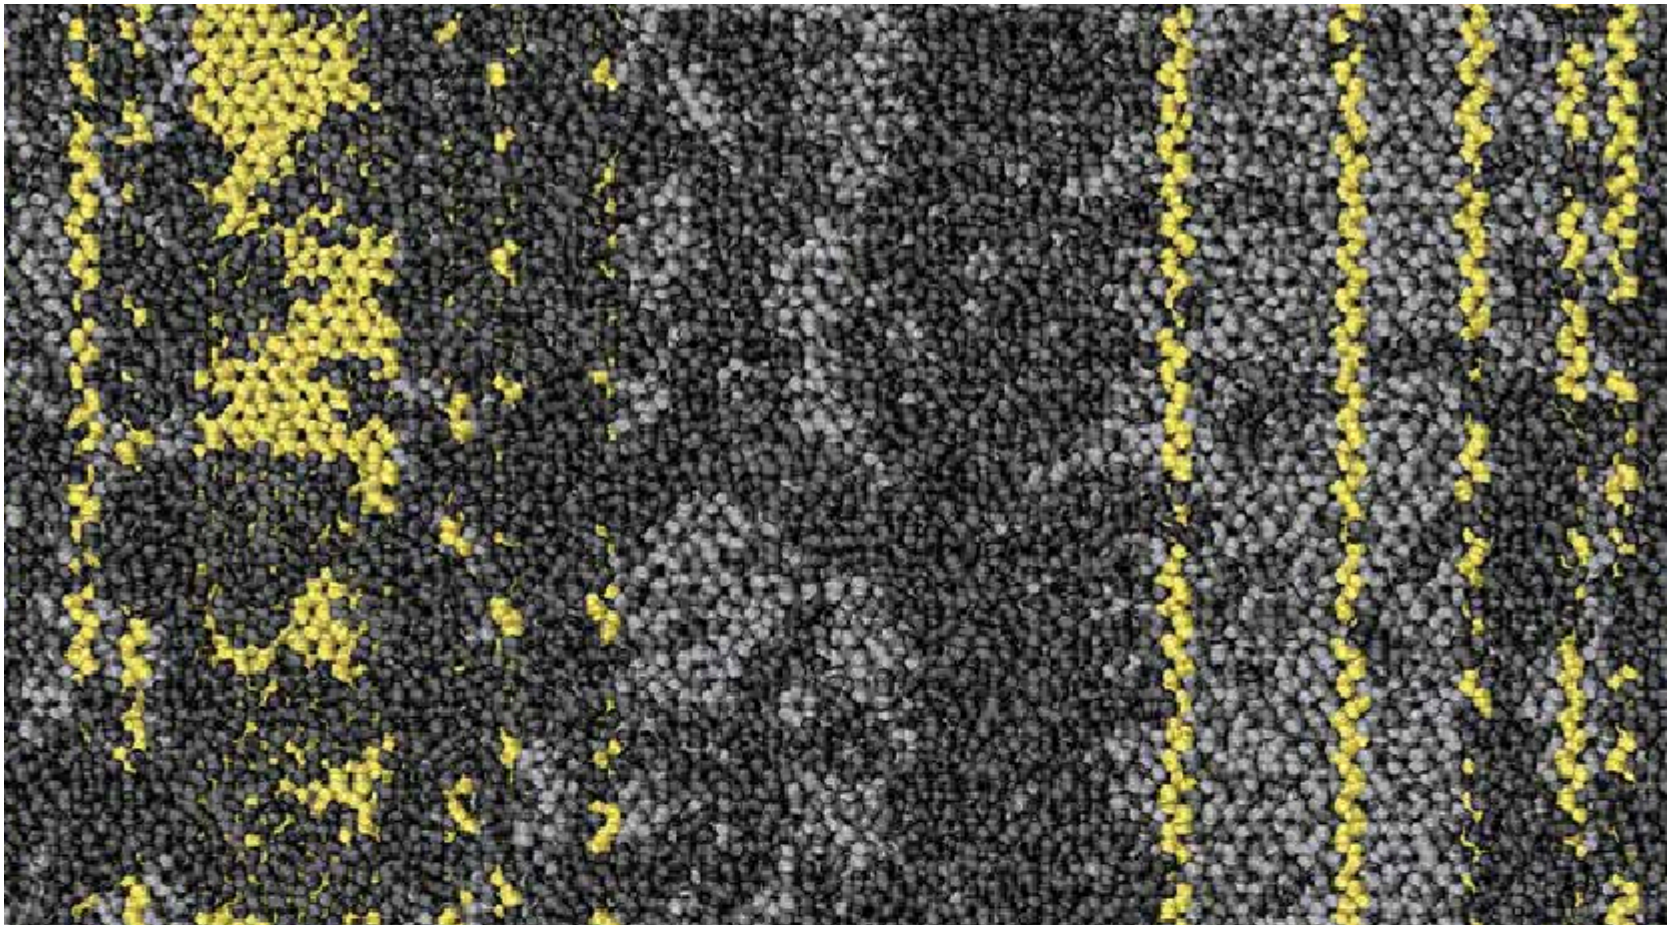


Yellow Transition 571

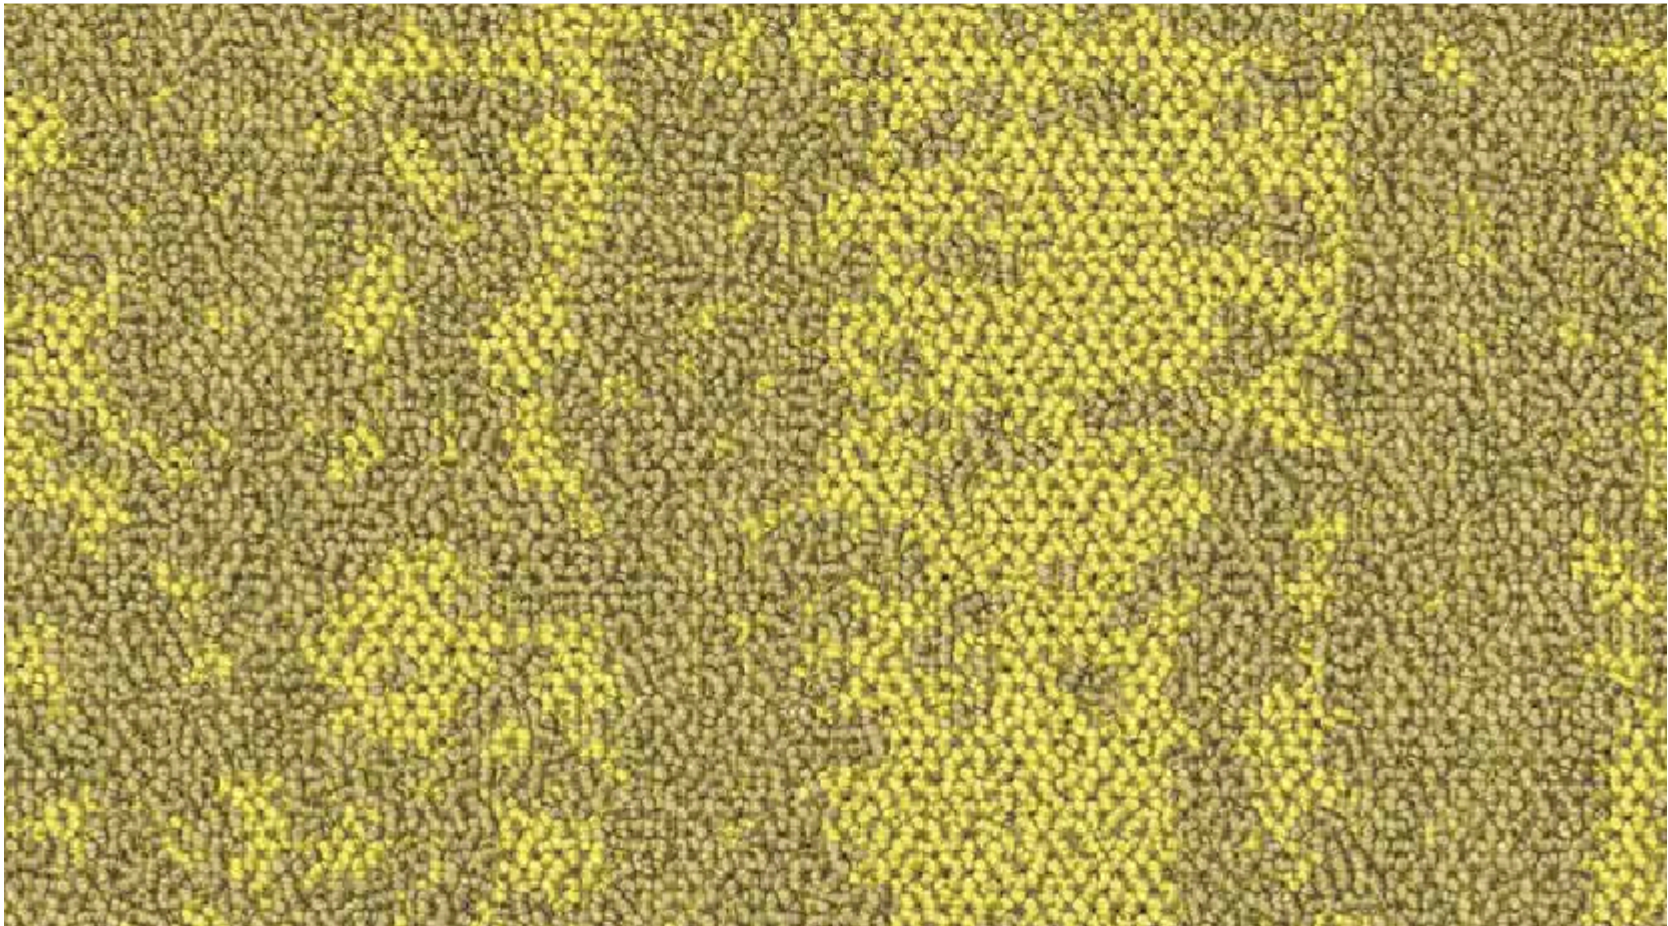

Yellow 535

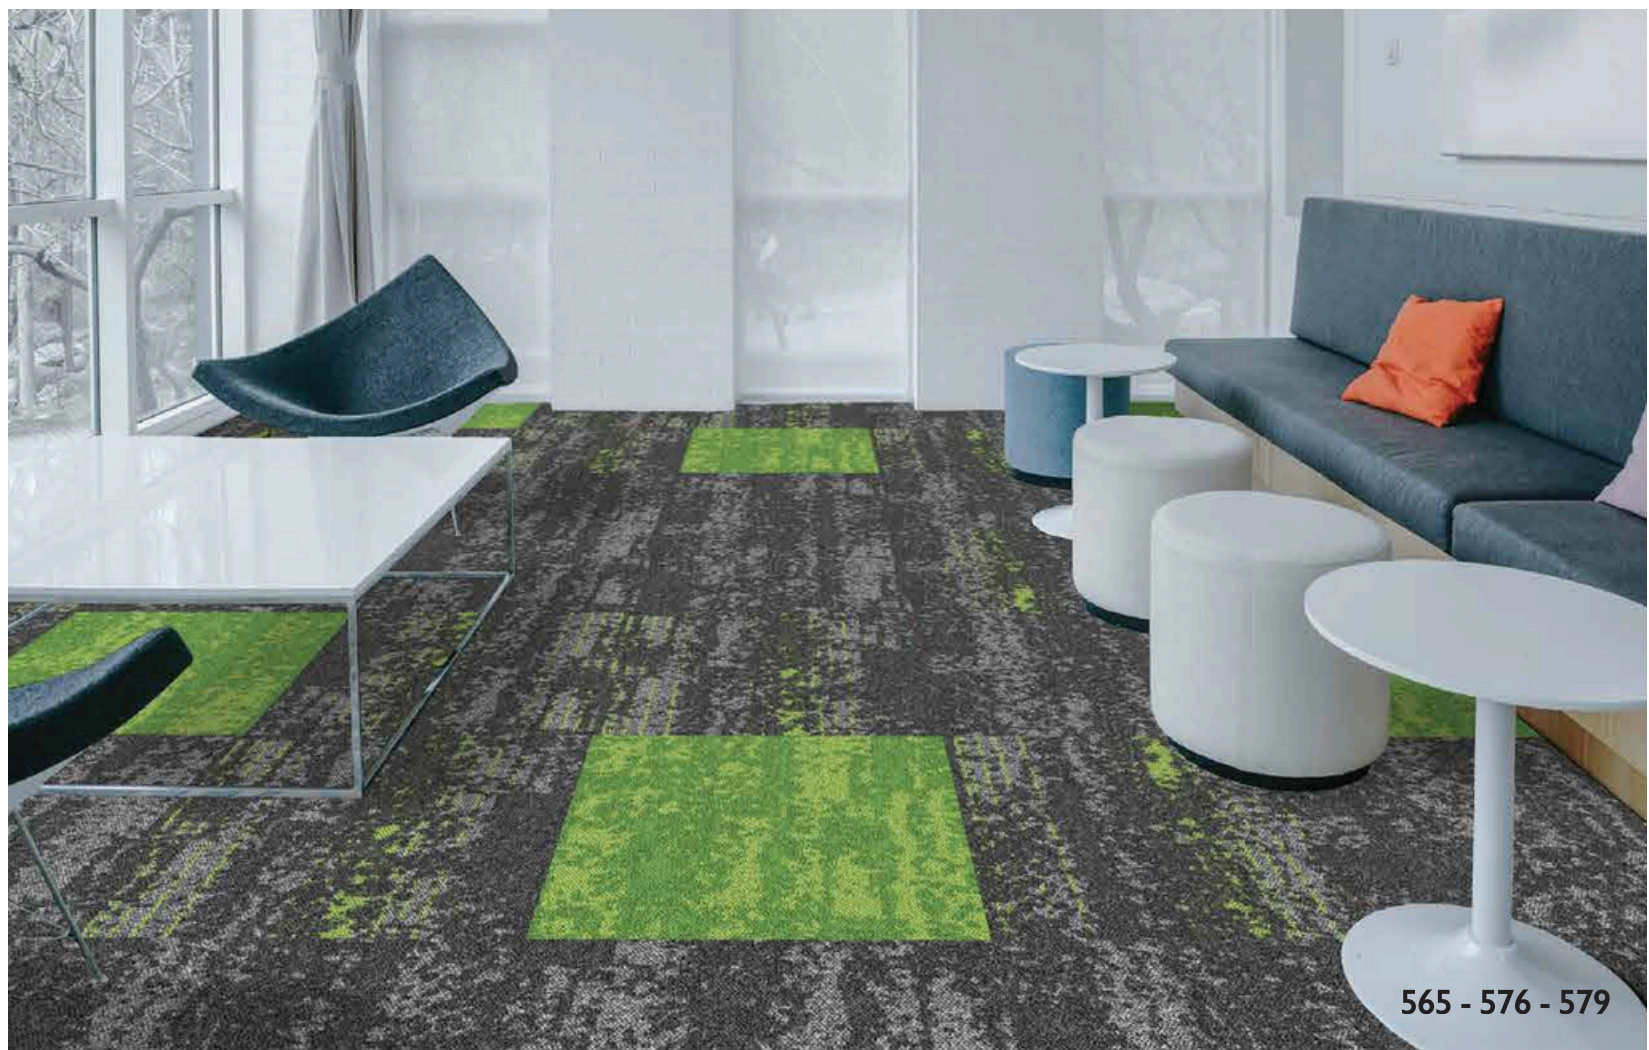


565 - 576 - 579

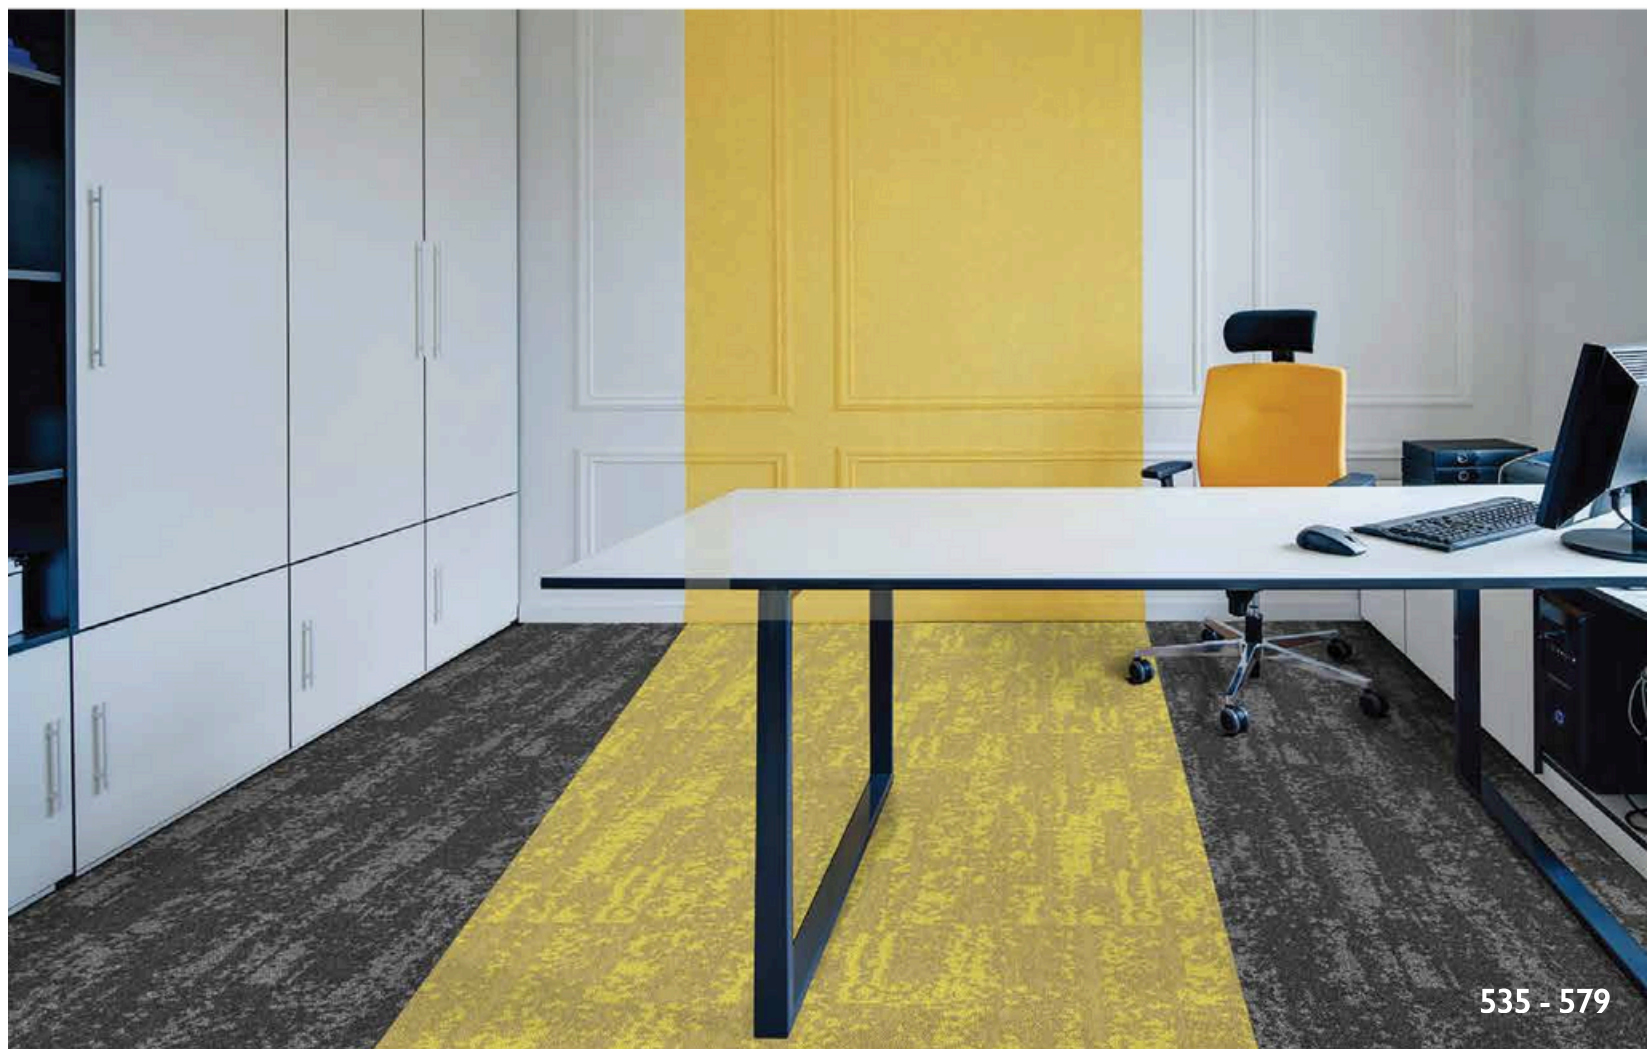


535 - 579

CORAL REEF

50cm
50cm
TILE

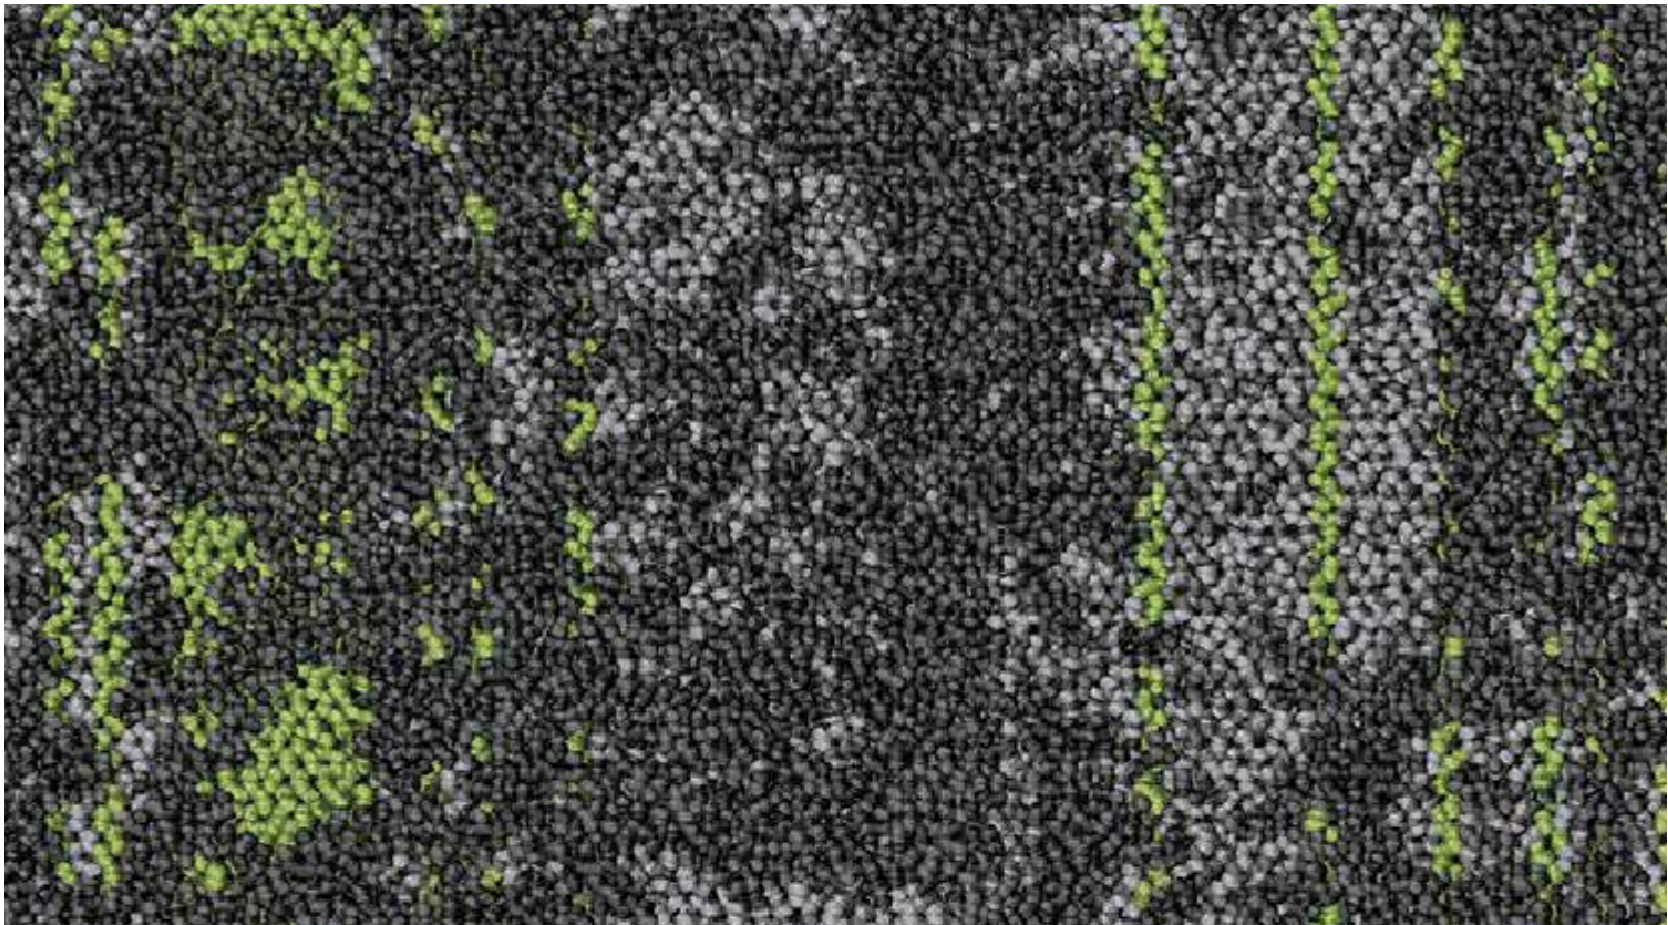

Green Transition 576

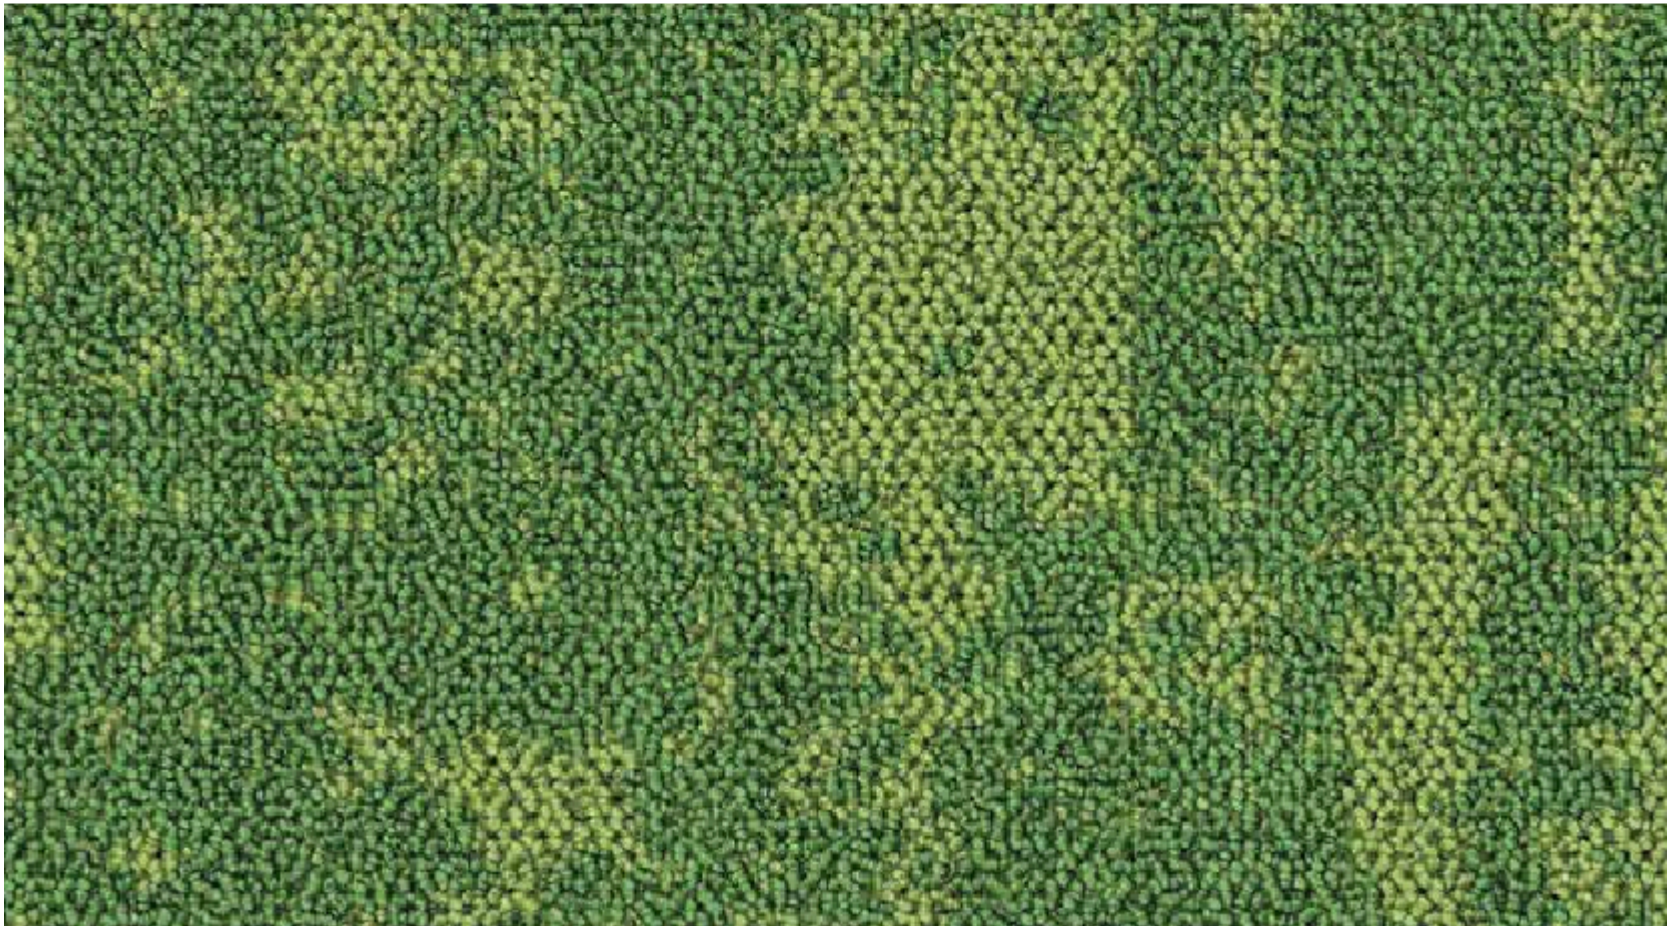


Green 565




CORAL REEF

50cm
50cm
TILE

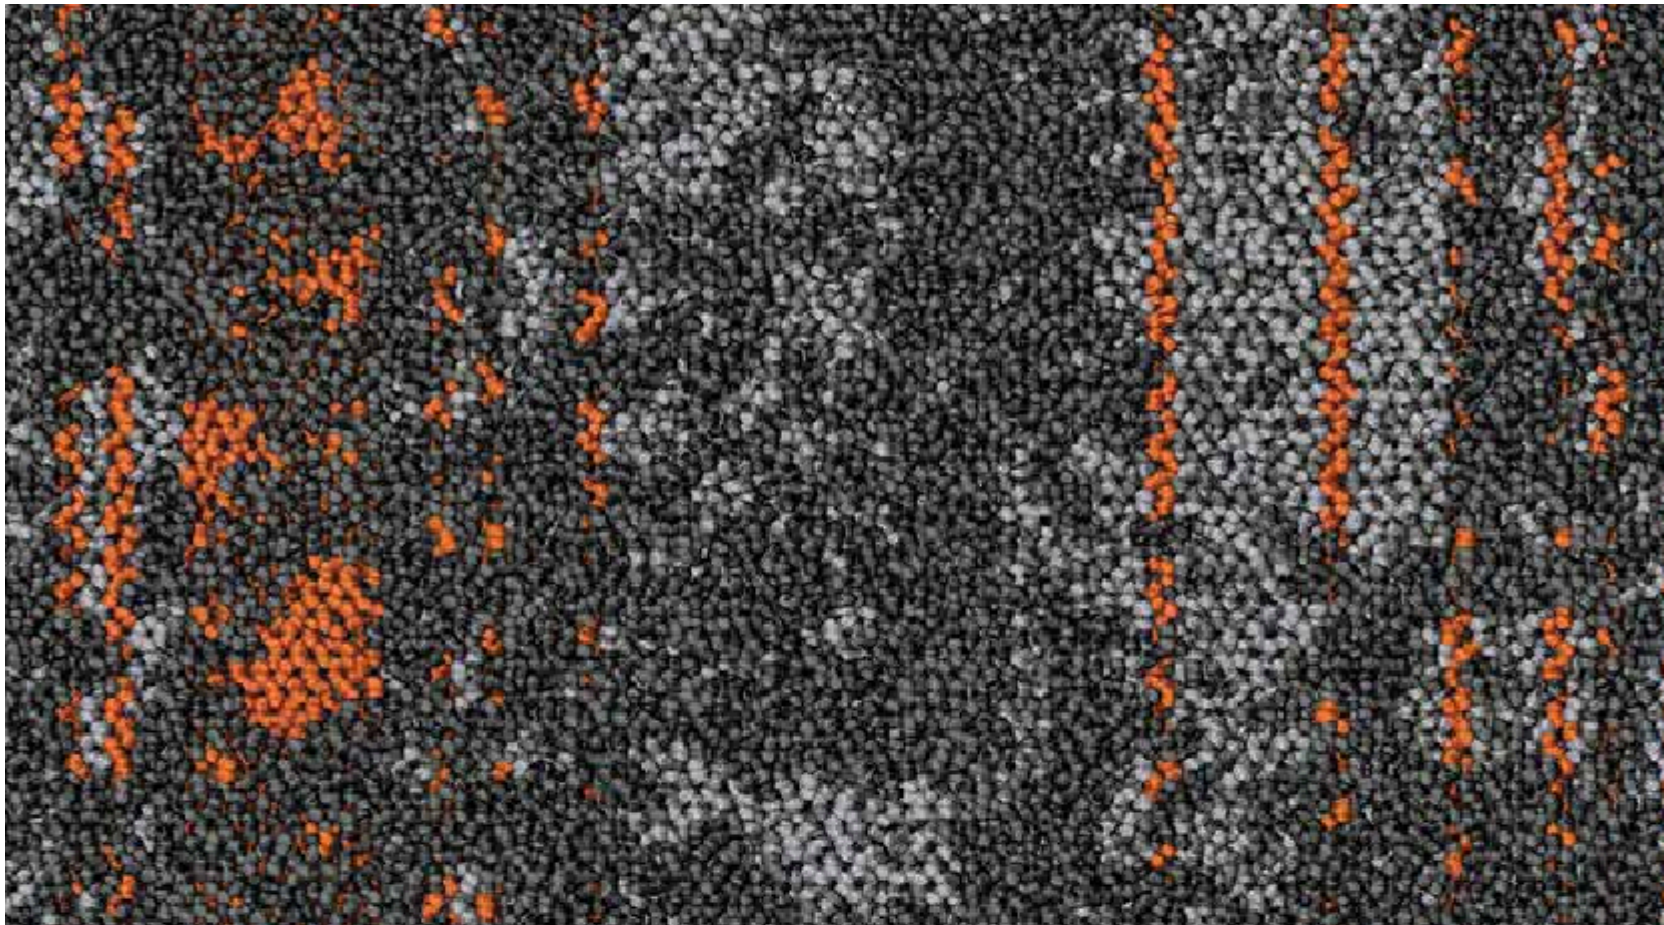


Orange Transition 570

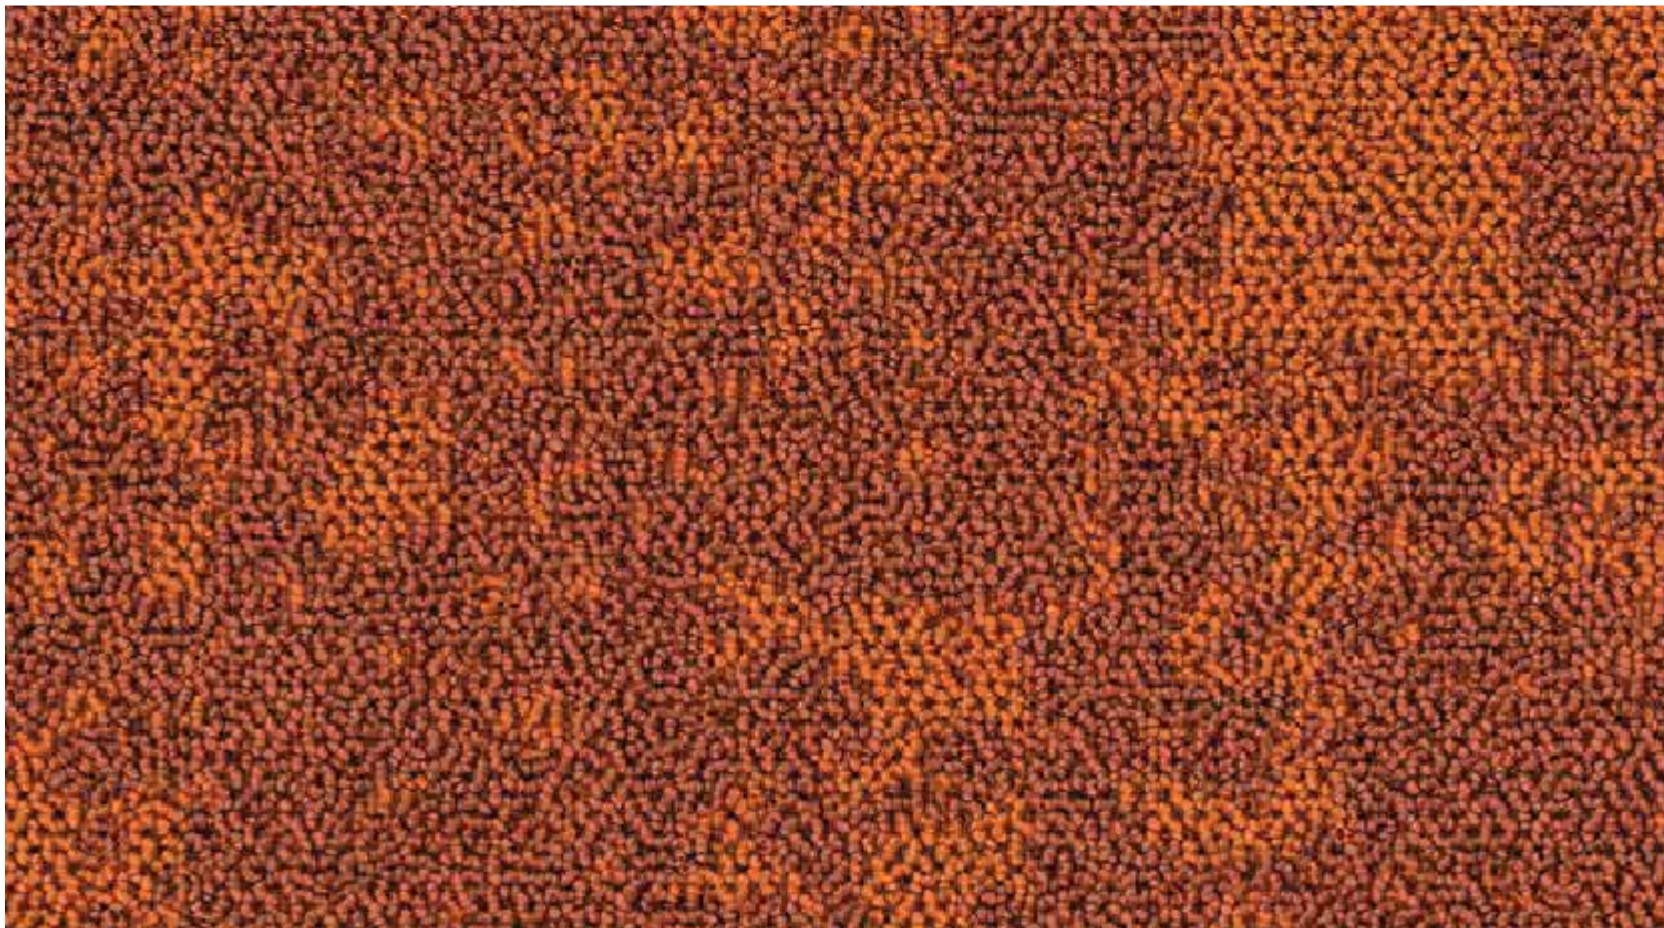


Orange 522



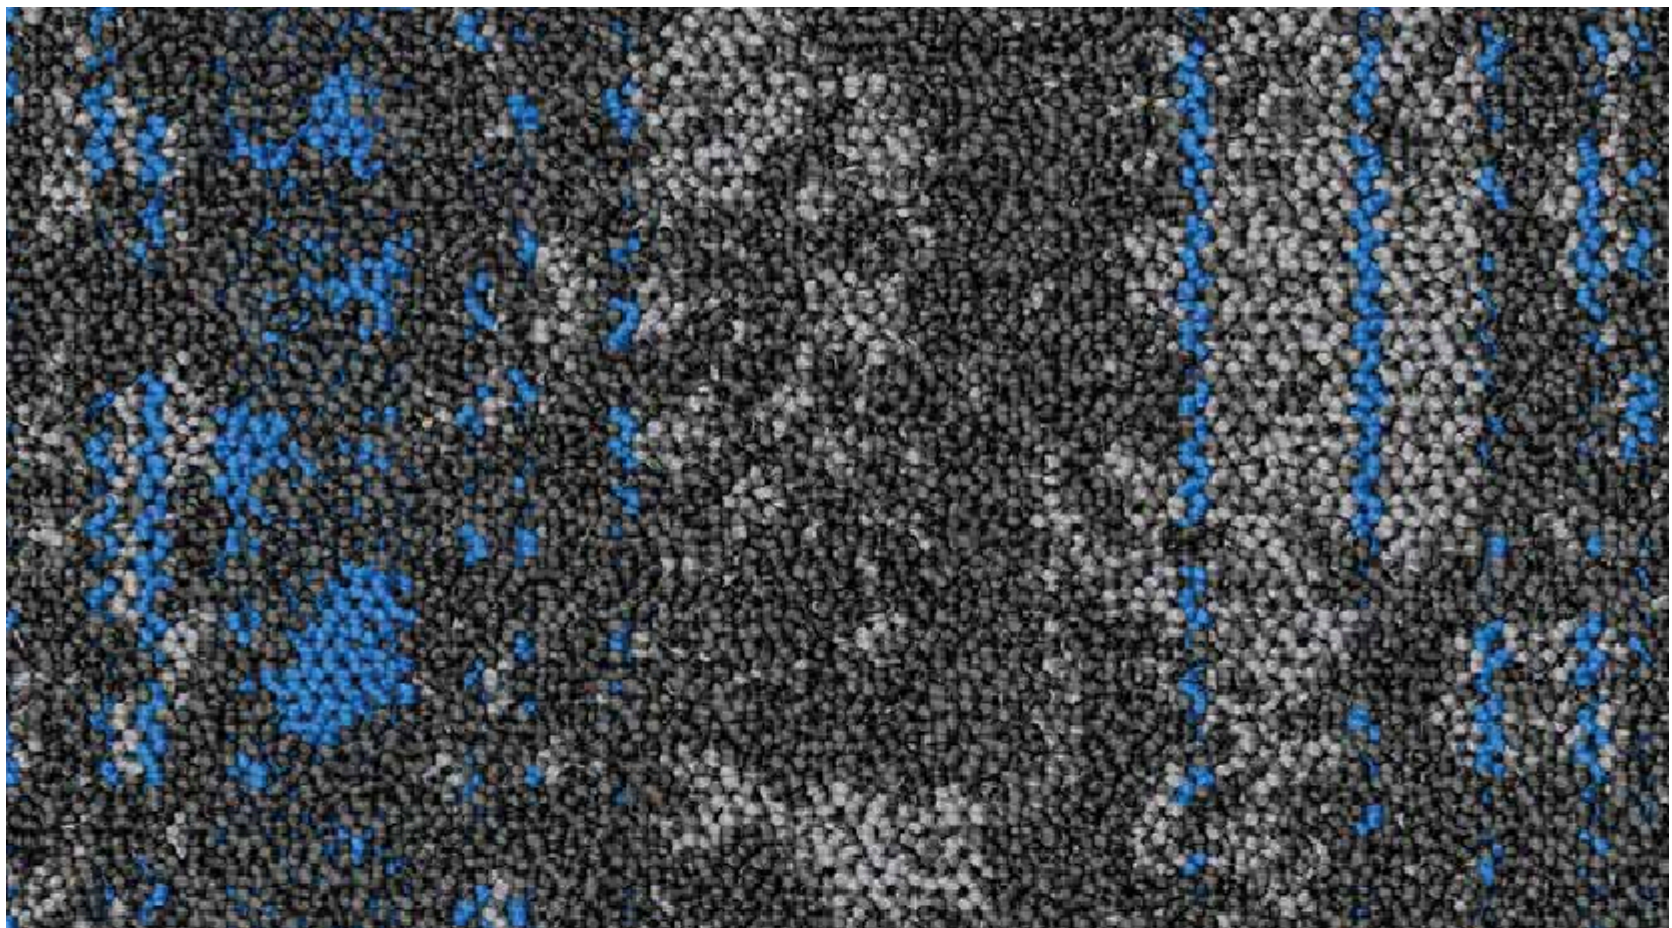

Blue Transition 577

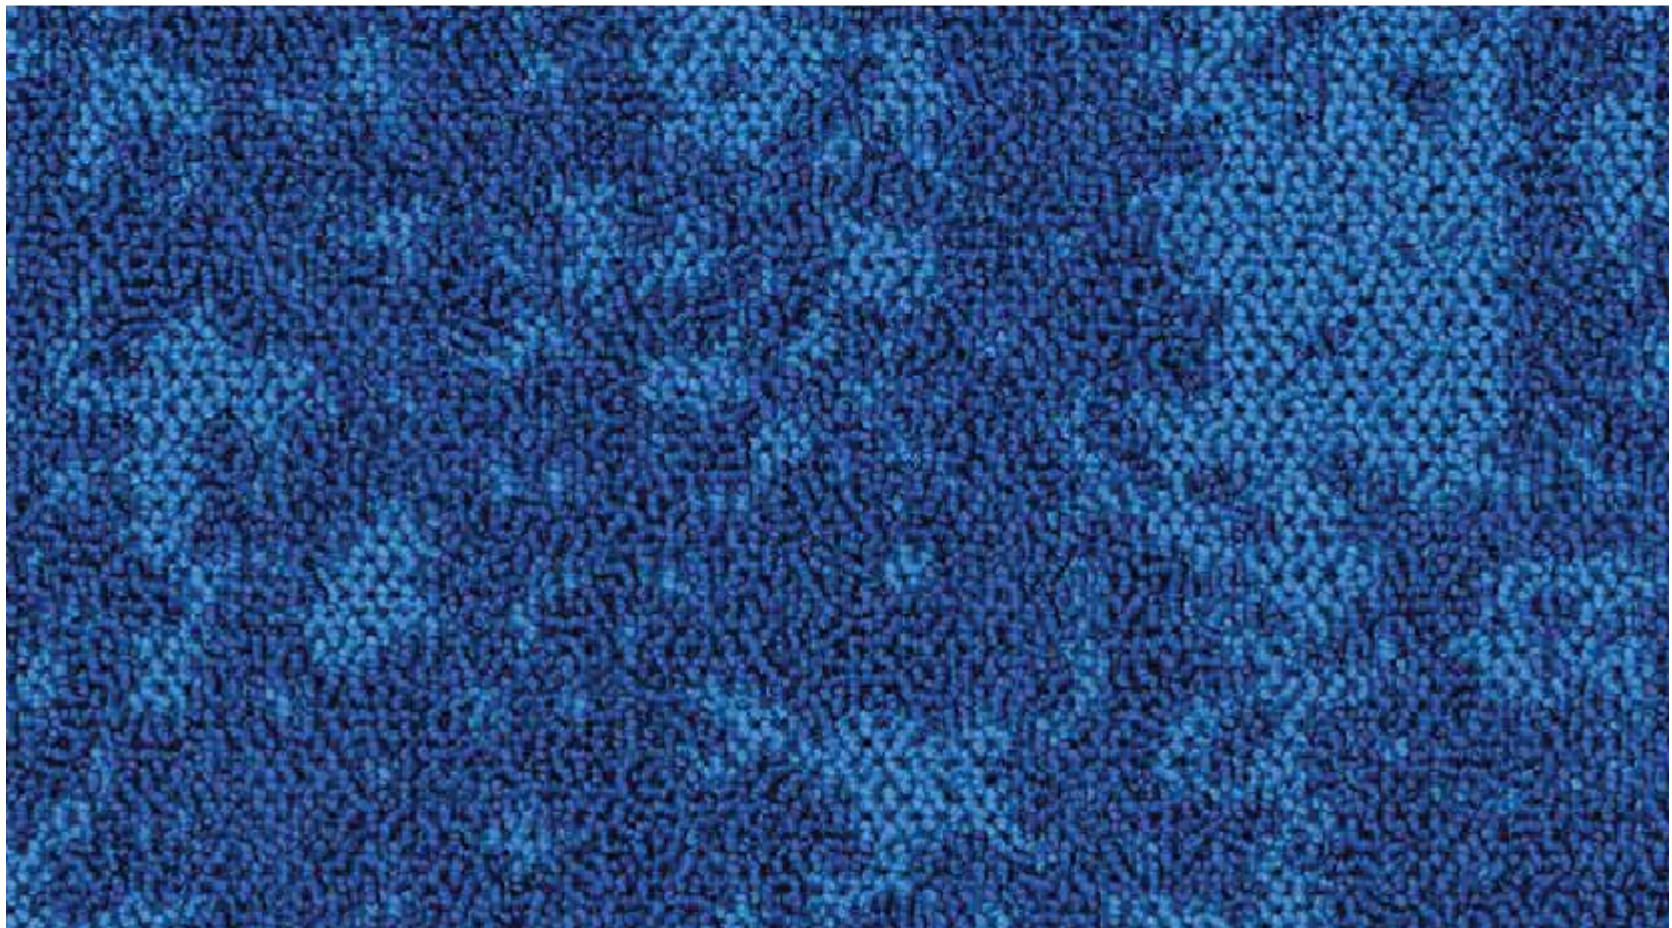

Blue 555




579




579 - 555 - 577

CORAL REEF

SDN Carpet Tile 50cm x 50cm

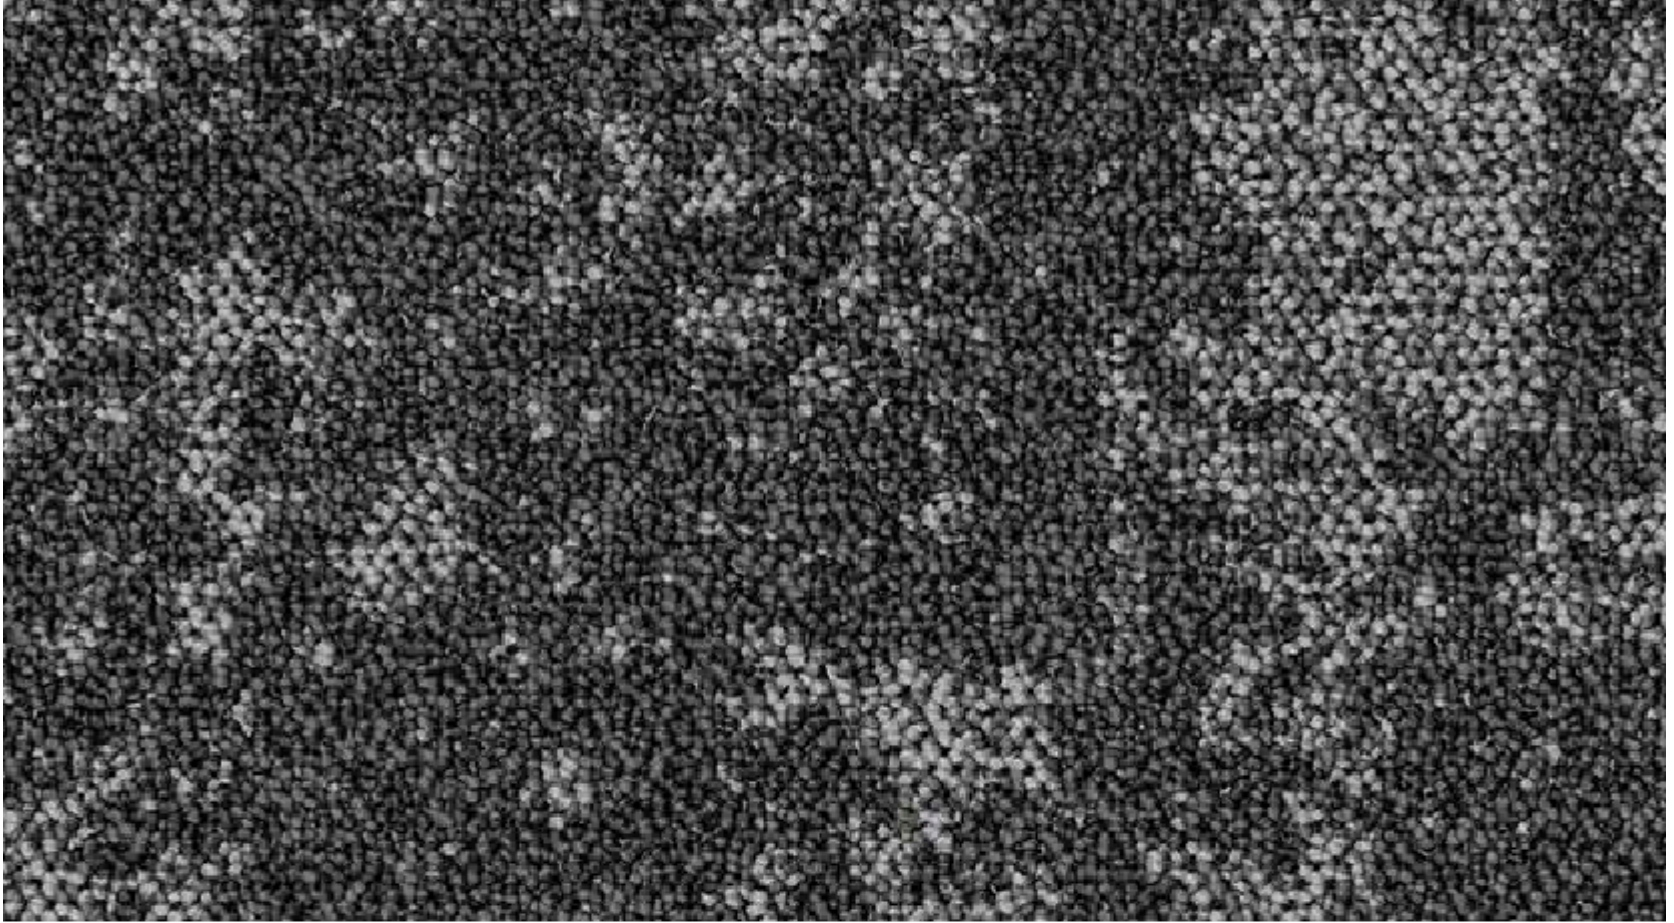


Dark Grey 579 (Base)

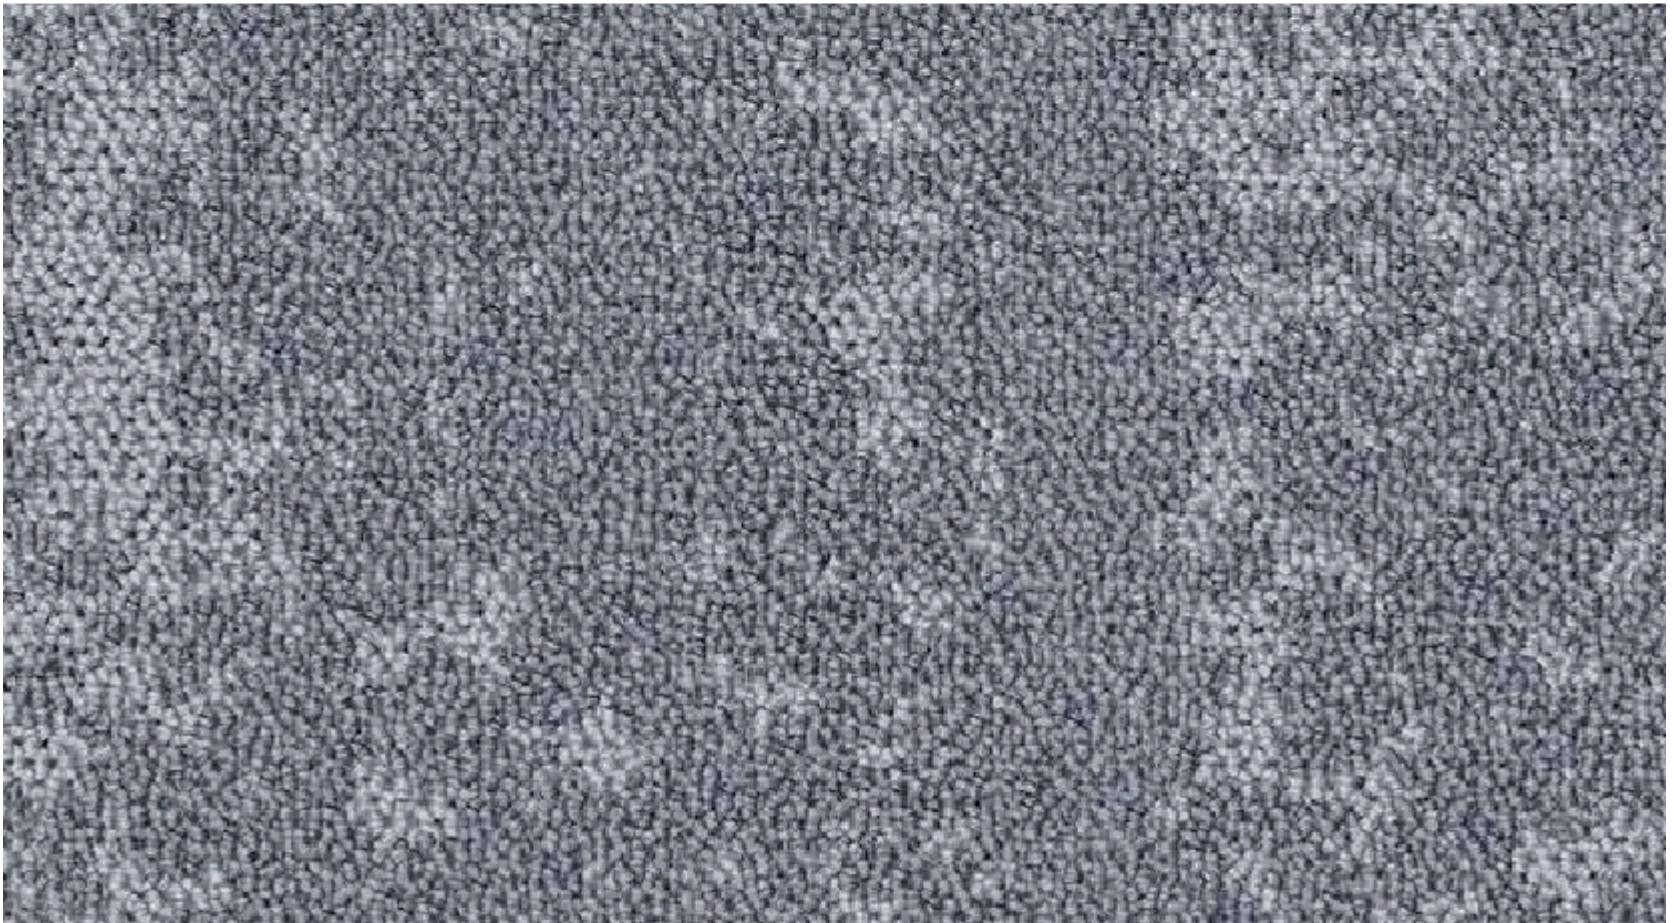

Light Grey 575 (Overall)

CORAL REEF


SDN Carpet Tile 50cm x 50cm

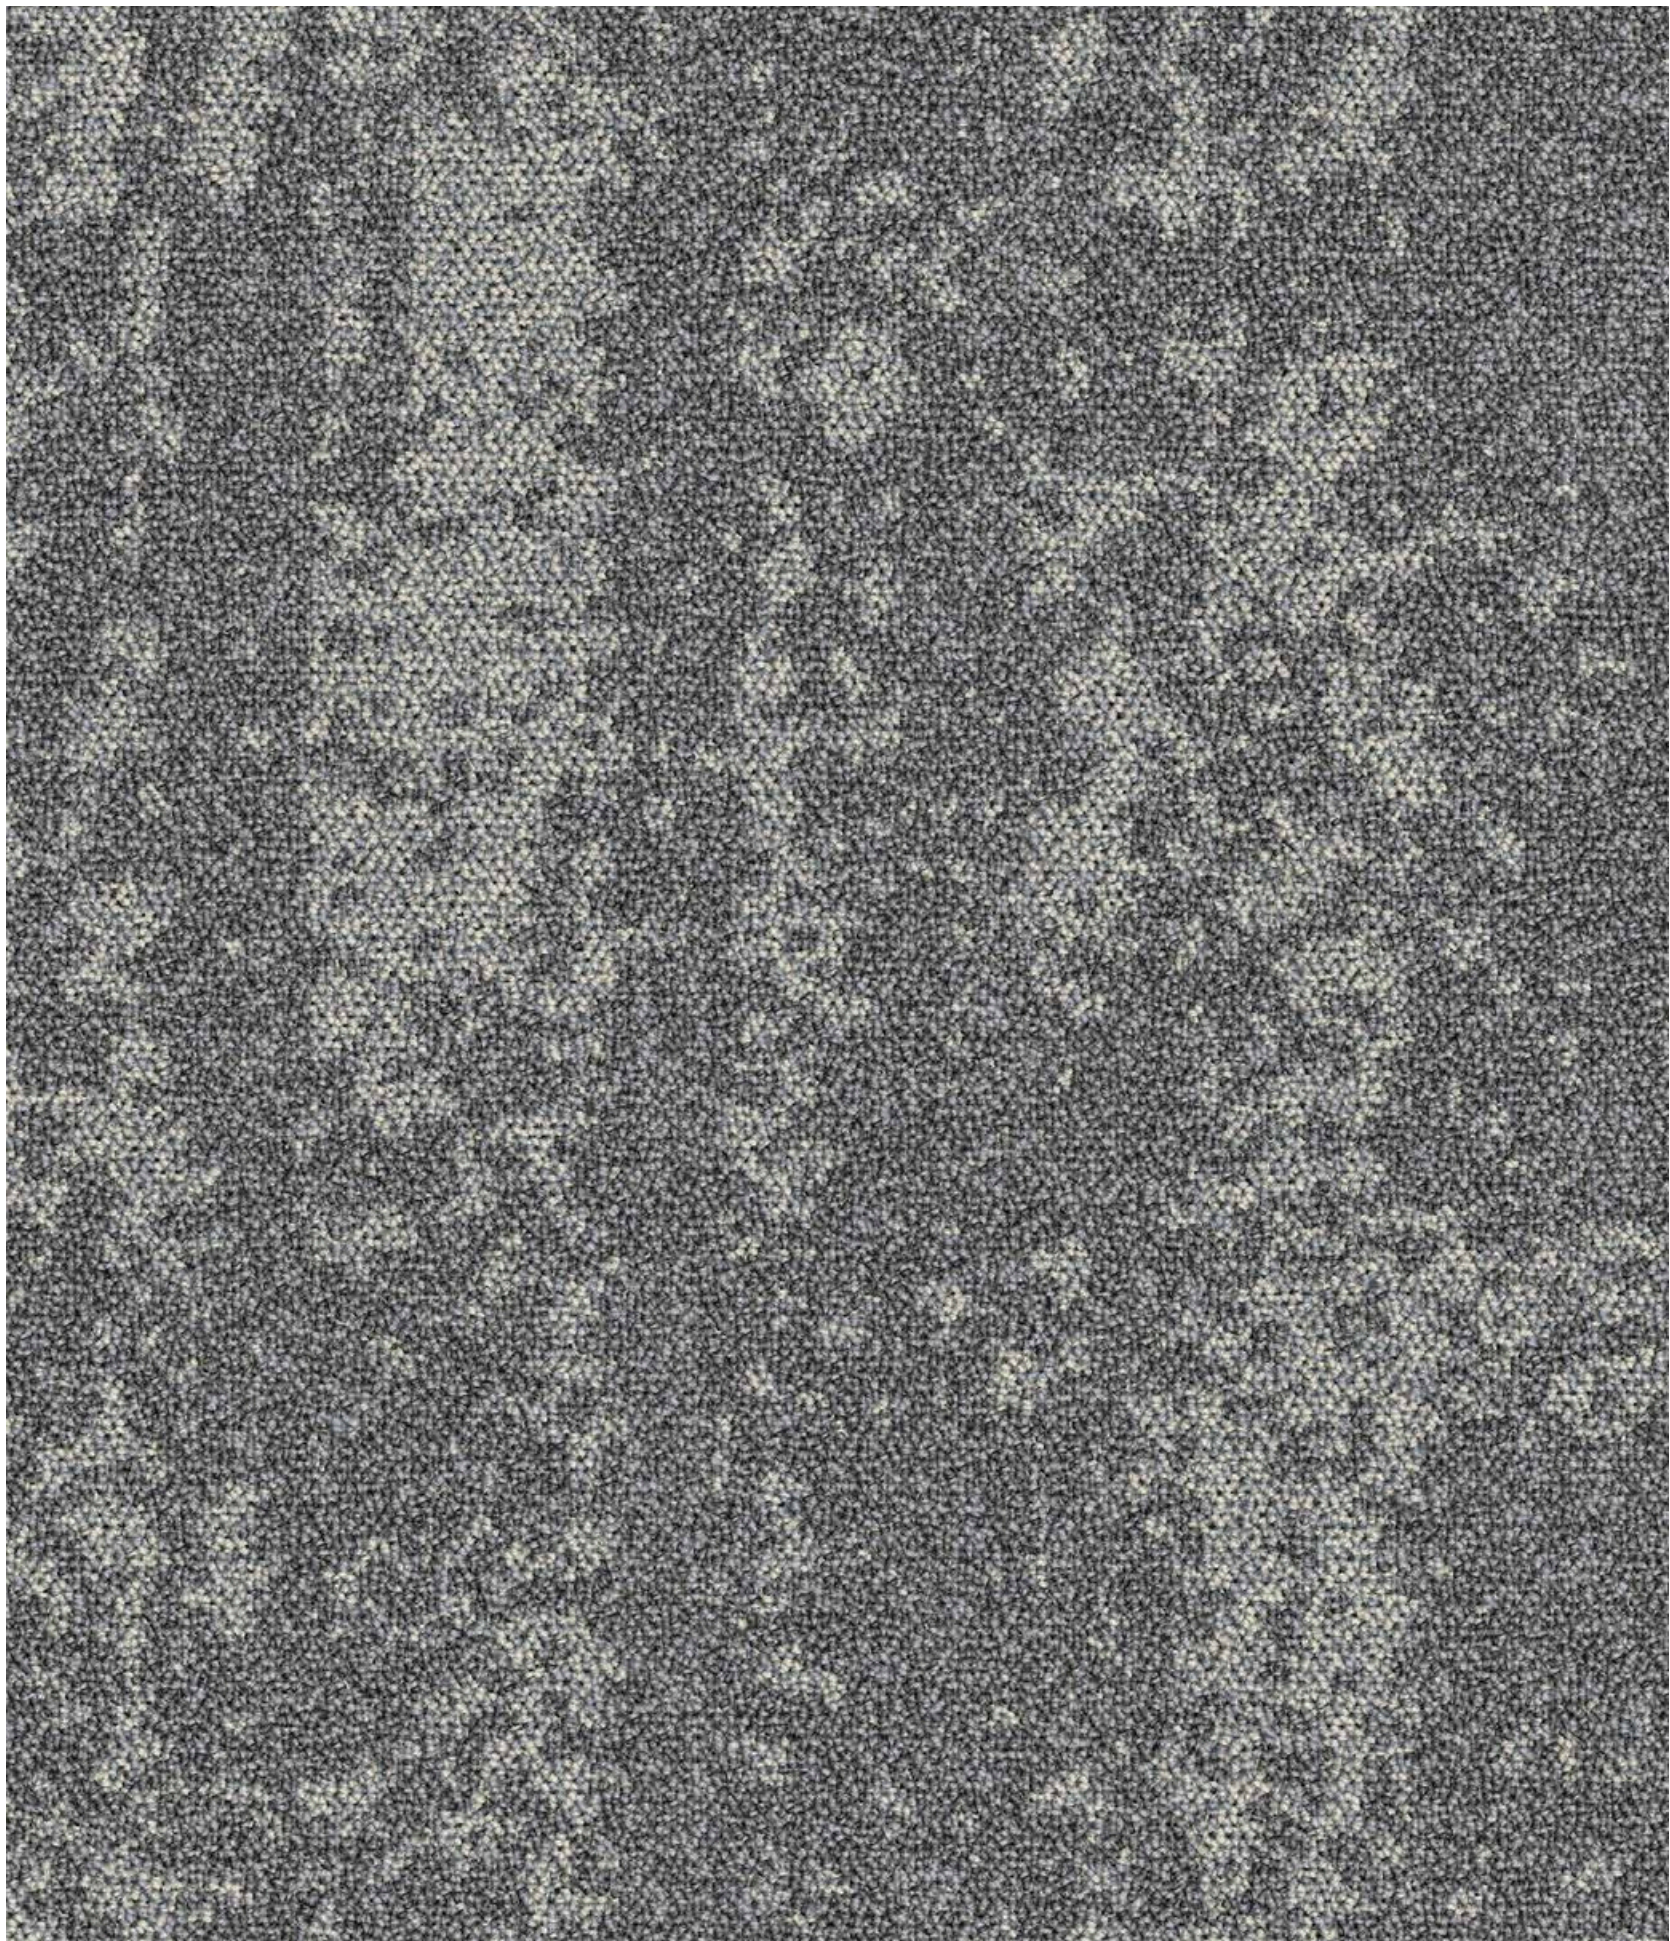


Grege 578 (Overall)

CORAL REEF

50cm
50cm
TILE

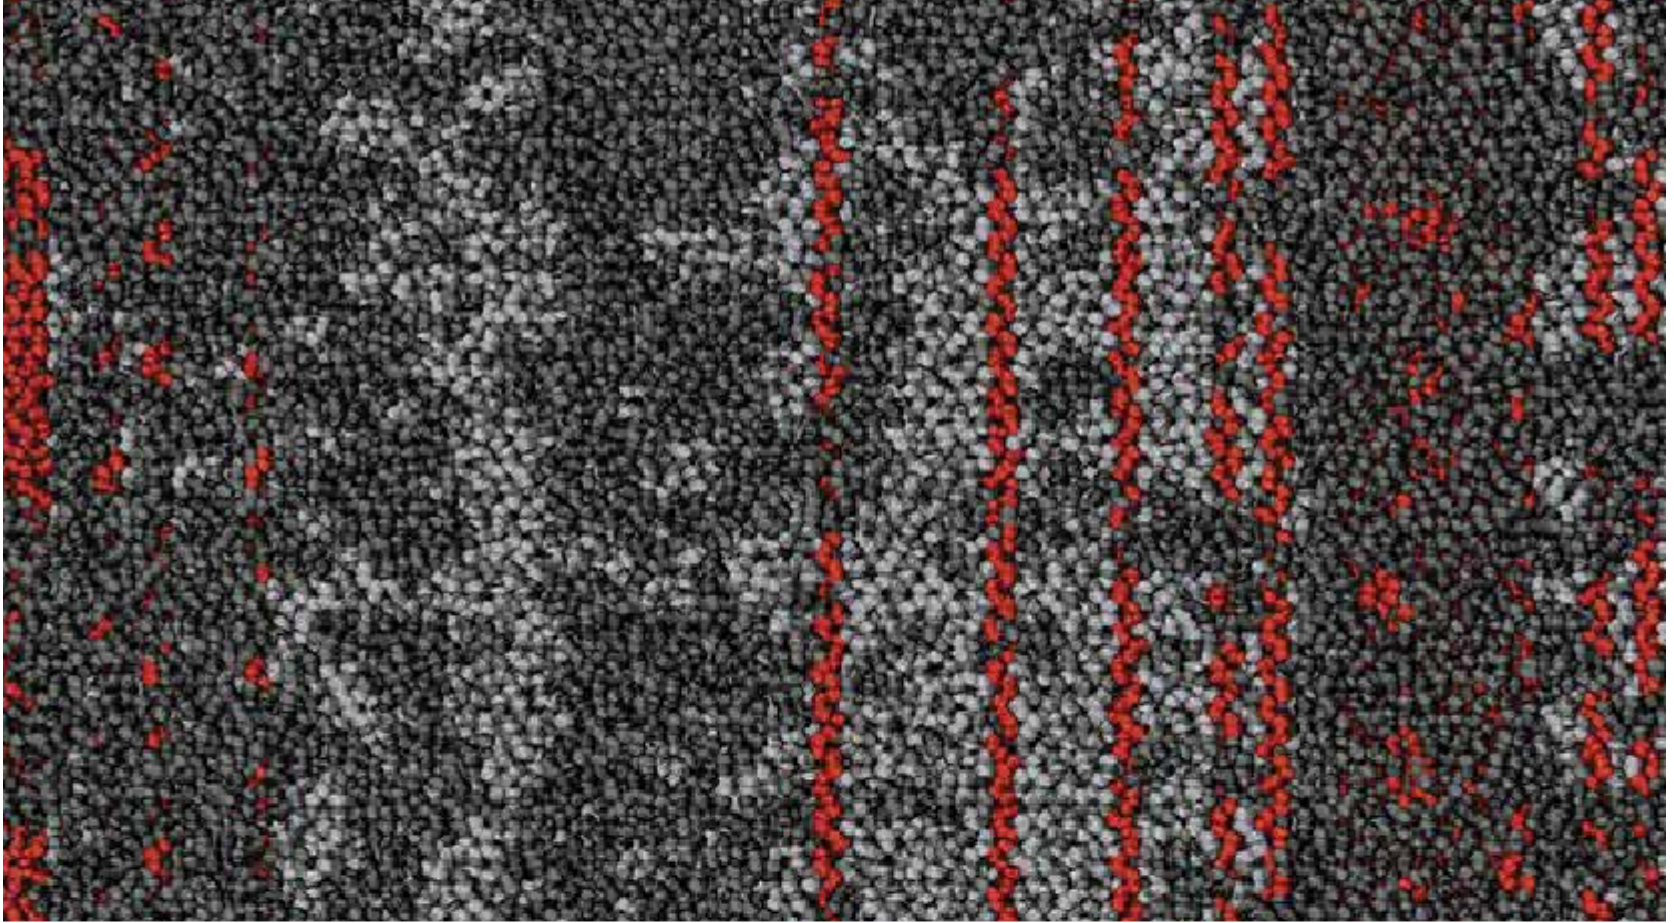


Red Transition 572

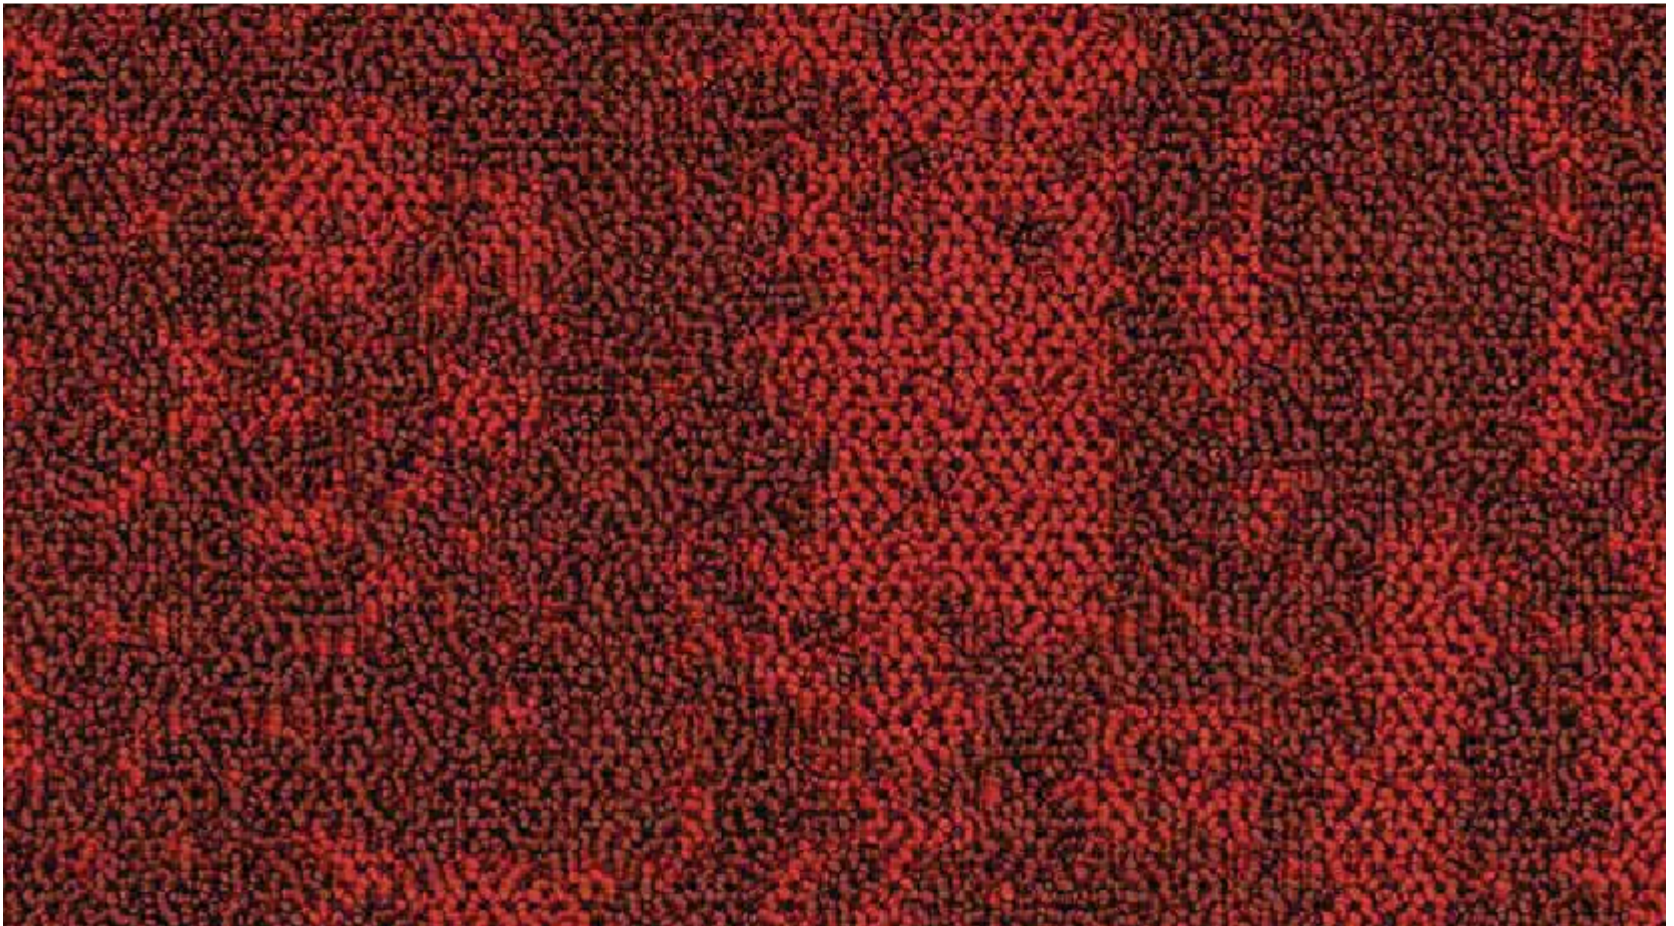

Red 525



579 - 572 - 525

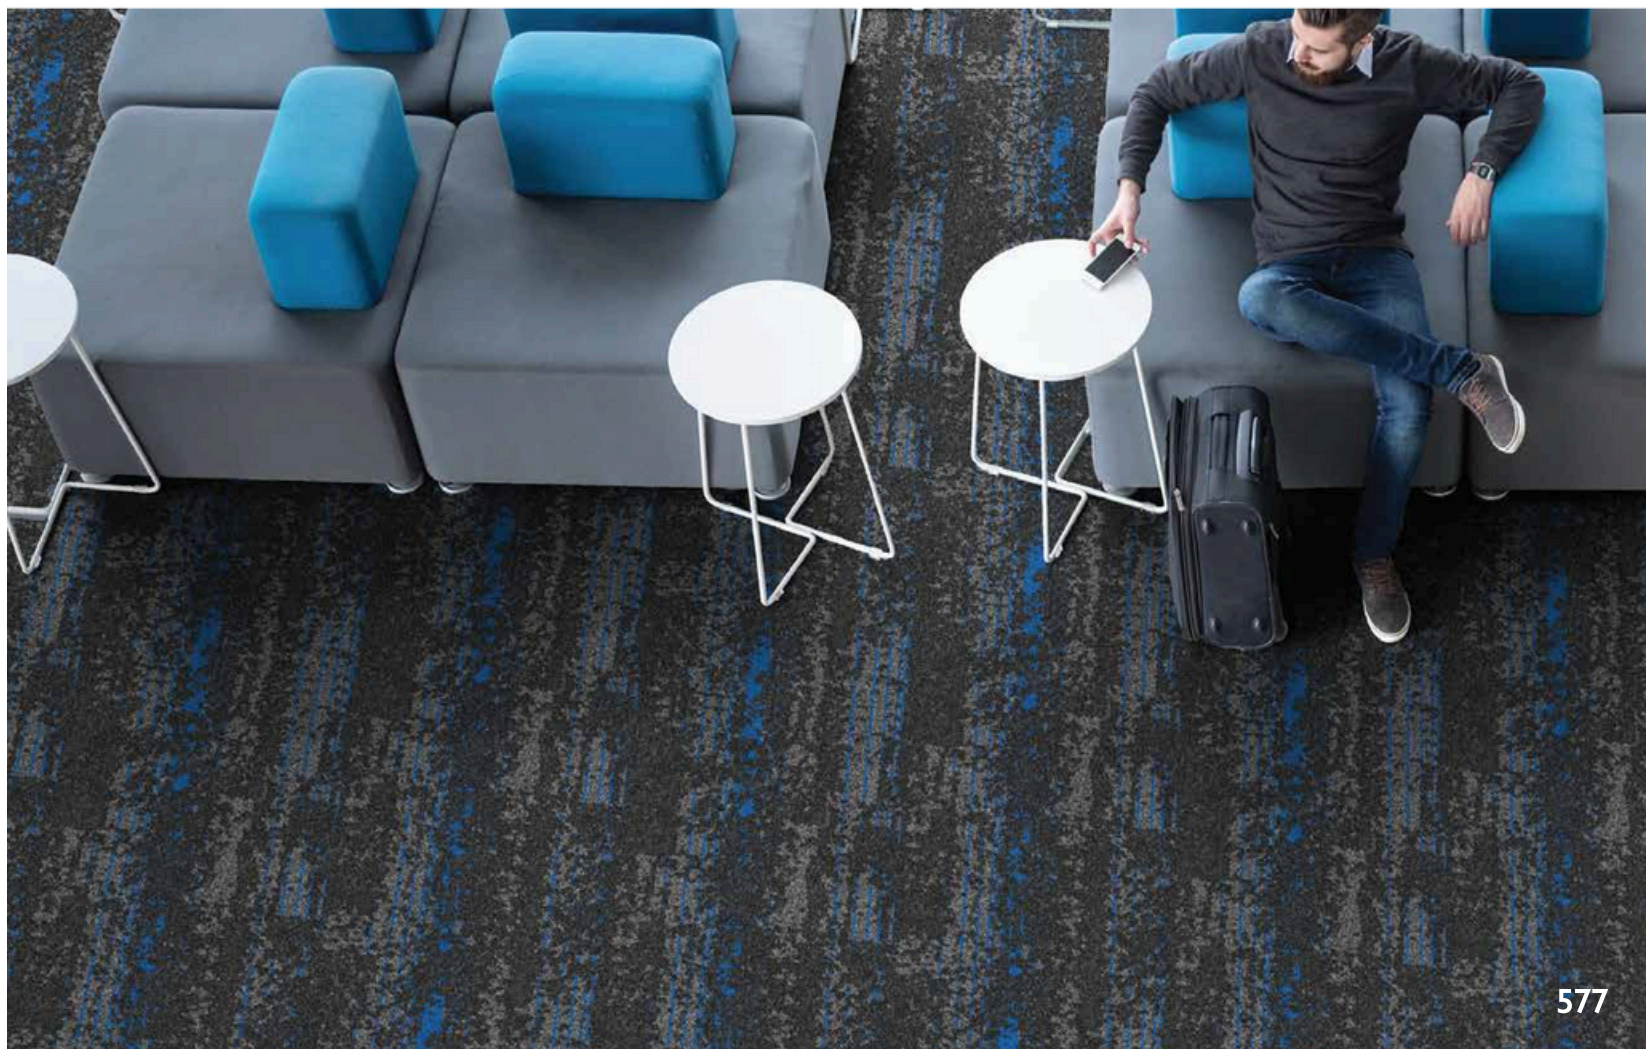


577


CORAL REEF (50 x 50cm Tiles) can also be ordered in planks as

CORAL ISLAND

Narrow Plank - 25 cms x 1mtr (on request)

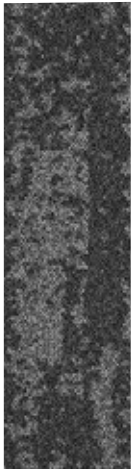

579 Base Col.

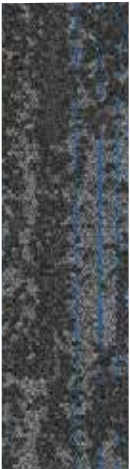

577



576



572



571



570




555



565



525

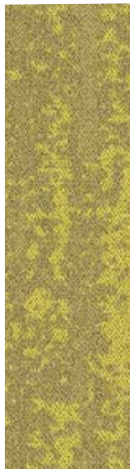

535



522

CORAL REEF

SDN Carpet Tile 50cm x 50cm



PRODUCT INFORMATION

Construction Style Fiber	LOOP
Pile Weight Gauge	Coral REEF
Primary Backing	100% Nylon (Polyamide 6)
Secondary Backing Size	630 g/m2
Pile Height Total Height	1/10th
Recommended Installation	Non-Woven
Tile / Carton	StableShield- 100% Vinyl
	50 cm x 50 cm
	3.5 mm / 5.3mm
	7.5 mm
	Quarter Turn or Brick
	20 Pcs (5m2)

TECHNICAL PERFORMANCES

Classification	Commercial / Heavy Contract	Class 33
VOC (Green Label Plus)	ASTM D5116-06	< 0.5 mg/m ² /hour (CRI GLP)
Flammability	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
Reaction to Fire	ASTM E648-08	Cfl-S1
Static Propensity	ISO 6356	0.2 KV
Color Fastness	AATCC/16	5/5 on Grey Scale
Thermal Resistance	ISO 8302	0.04 m ² /KW
Impact Sound Insulation	ISO 140-8	23 dB
Dimensional Stability	EN 986	< 0.20%
Castor Chair Test	DIN 54324	R ≥ 2.4
Smoke Density	EN ISO 9239-1:2002	< 450



Terms and Conditions:

Disclaimer:

