allure® ISOCORE

ISOSTONE WALL TILES

Featuring ISOCORE Technology®

- ↕ 8 MM — TOTAL THICKNESS
- INDUSTRIAL CLASS 42
- COMMERCIAL CLASS 33
- LUXURY TILE SIZE
- ACOUSTIC COMFORT
- ISOCORE INSIDE

- CAN BE INSTALLED OVER CERAMIC TILES WITH GROOVES
- SOUND INSULATING UNDERLAYER

ISOSTONE WALL TILES



Floor: MS40214 Scratch Concrete Brown
Wall: MW645112 Concrete Light Grey

CREATIVE WALL DESIGN AND INNOVATIVE INSTALLATION SUITABLE FOR ALL WALLS

Quick Installation

Its lightweight structure allows for easy installation on all surfaces. No clicking, drilling or substructures needed for installation. Simply stick on the wall elements.

Authentic Surface Textures

Isostone Wall Tiles come with authentic surfaces that match each decor.

Extremely Light and Durable

Heavy is not always necessarily strong or durable. Due to its patented Isocore technology, Isocore is both light and strong.

Dirt Resistant

Ceramic bead coating makes wall tiles resistant to dirt and very easy to clean

100 % Waterproof

Isostone wall tiles are entirely waterproof, which means they can be installed in bathrooms and easily cleaned with running water.

Suitable for All Surfaces

Does not require special substructures, can even be installed over existing ceramic tiles

High Stability

Rigid Isocore technology allows Isostone tiles to be highly stable. This allows for covering of 90° corners and uneven surfaces perfectly.

Easy & Clean Cutting

Lightweight and rigid formula allows for clean cuts on installation sight, even with standard tools; saving time and money on labor.

15 YEAR GUARANTEE DOMESTIC 10 YEAR GUARANTEE COMMERCIAL

ISOSTONE WALL TILES

allure ISOCORE



White Marble MW47911



Scratch Concrete Brown MW40214

allure ISOCORE


ISOSTONE WALL TILES

15 YEAR GUARANTEE DOMESTIC

10 YEAR GUARANTEE COMMERCIAL



Concrete White MW645115

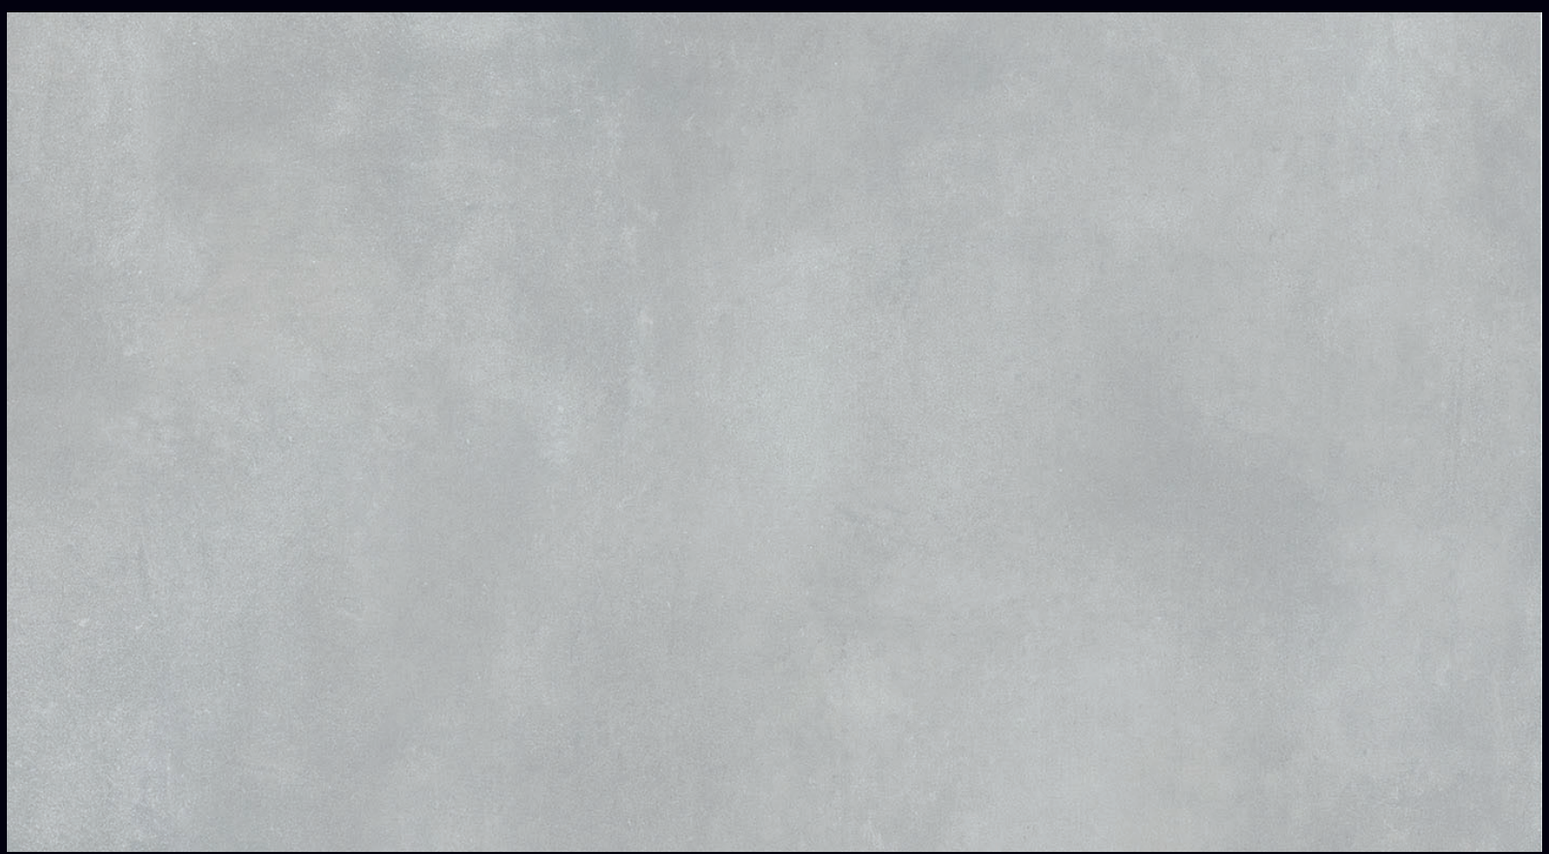

Concrete Light Grey MW645112

ISOSTONE FLOOR & WALL TILES

Description	Standard	Symbol	Results
Total Thickness	8 mm		
Construction	2 mm LVT + 4 mm ISOCORE + 2 mm IXPE		
Wearlayer	0.55 mm		
Size	Floor: 406.88 mm x 812.80 mm / Wall 457.20 mm x 914.40 mm		
Edge Detail	Micro-Bevel Edge		
Coating	Urethane with Enhanced Ceramic Bead		
Treatment	Ultrafresh		
m2/carton	Floor: 1.982 m^2 / Wall: 3.35 m^2		
Limited Warranty	10 Year Commercial / 15 Year Residential		
Classification	EN 16511		Commercial - Heavy (Class 33) Industrial - General (Class 42)
Reaction to Fire	EN13501-1		B_{fl}-s1 Classification
Content of PCP			< 5 ppm PASS
Formaldehyde Emission	EN 717-1		Class E1
Slip Resistance (Dry)	EN 13893		Class DS
Slip Resistance (Wet)	DIN 51130		Grade R10
Thermal Resistance	EN 12664		0.08800 m^2 K/W at 10°C
Static Electrical Propensity	EN EN 1815		Average: -6.8 kV SURPASS
Impact Sound Insulation	EN ISO 140-8		ΔL_W = 18 dB
Castor Chair Resistance	EN 425		PASS
Effect of Furniture Leg	EN 424		PASS
Residual Indentation	EN ISO 24343-1		≤ 0.2 mm SURPASS
Dimensional Stability	EN ISO 239999		≤ 0.25% SURPASS

- CAN BE INSTALLED OVER CERAMIC TILES WITH GROOVES
- SOUND INSULATING UNDERLAYER
- 2 MM LVT + 4MM ISOCORE + 2MM UNDERLAYER (TOTAL 8MM THICKNESS)
- LUXURY TILE SIZE 406,40 MM X 812,80 MM

