




allure[®]
ISOCORE

ISOWOOD FLOOR & WALL PLANKS

Featuring  ISOCORE Technology[®]



- ◆ CAN BE INSTALLED OVER CERAMIC TILES WITH GROOVES
- ◆ SOUND INSULATING UNDERLAYER

ISOWOOD WALL PLANKS



Floor: Englewood Vanilla MS04223
Wall: Dark Walnut MW60915

CREATIVE WALL DESIGN AND INNOVATIVE INSTALLATION SUITABLE FOR ALL WALLS

Quick Installation

Its lightweight structure allows for easy installation on all surfaces. No clicking, drilling or substructures needed for installation. Simply stick on the wall elements.

Authentic Surface Textures

Isowood Wall Tiles come with authentic surfaces that match each decor.

Extremely Light and Durable

Heavy is not always necessarily strong or durable. Due to its patented Isocore technology, Isocore is both light and strong.

Dirt Resistant

Ceramic bead coating makes wall tiles resistant to dirt and very easy to clean

100 % Waterproof

Isowood wall tiles are entirely waterproof, which means they can be installed in bathrooms and easily cleaned with running water.

Suitable for All Surfaces

Does not require special substructures, can even be installed over existing ceramic tiles

High Stability

Rigid Isocore technology allows Isowood tiles to be highly stable. This allows for covering of 90° corners and uneven surfaces perfectly.

Easy & Clean Cutting

Lightweight and rigid formula allows for clean cuts on installation sight, even with standard tools; saving time and money on labor.




Natural Oak Medium MW03299



Dark Walnut MW60915

ISOWOOD FLOOR PLANKS

Featuring  ISOCORE Technology®

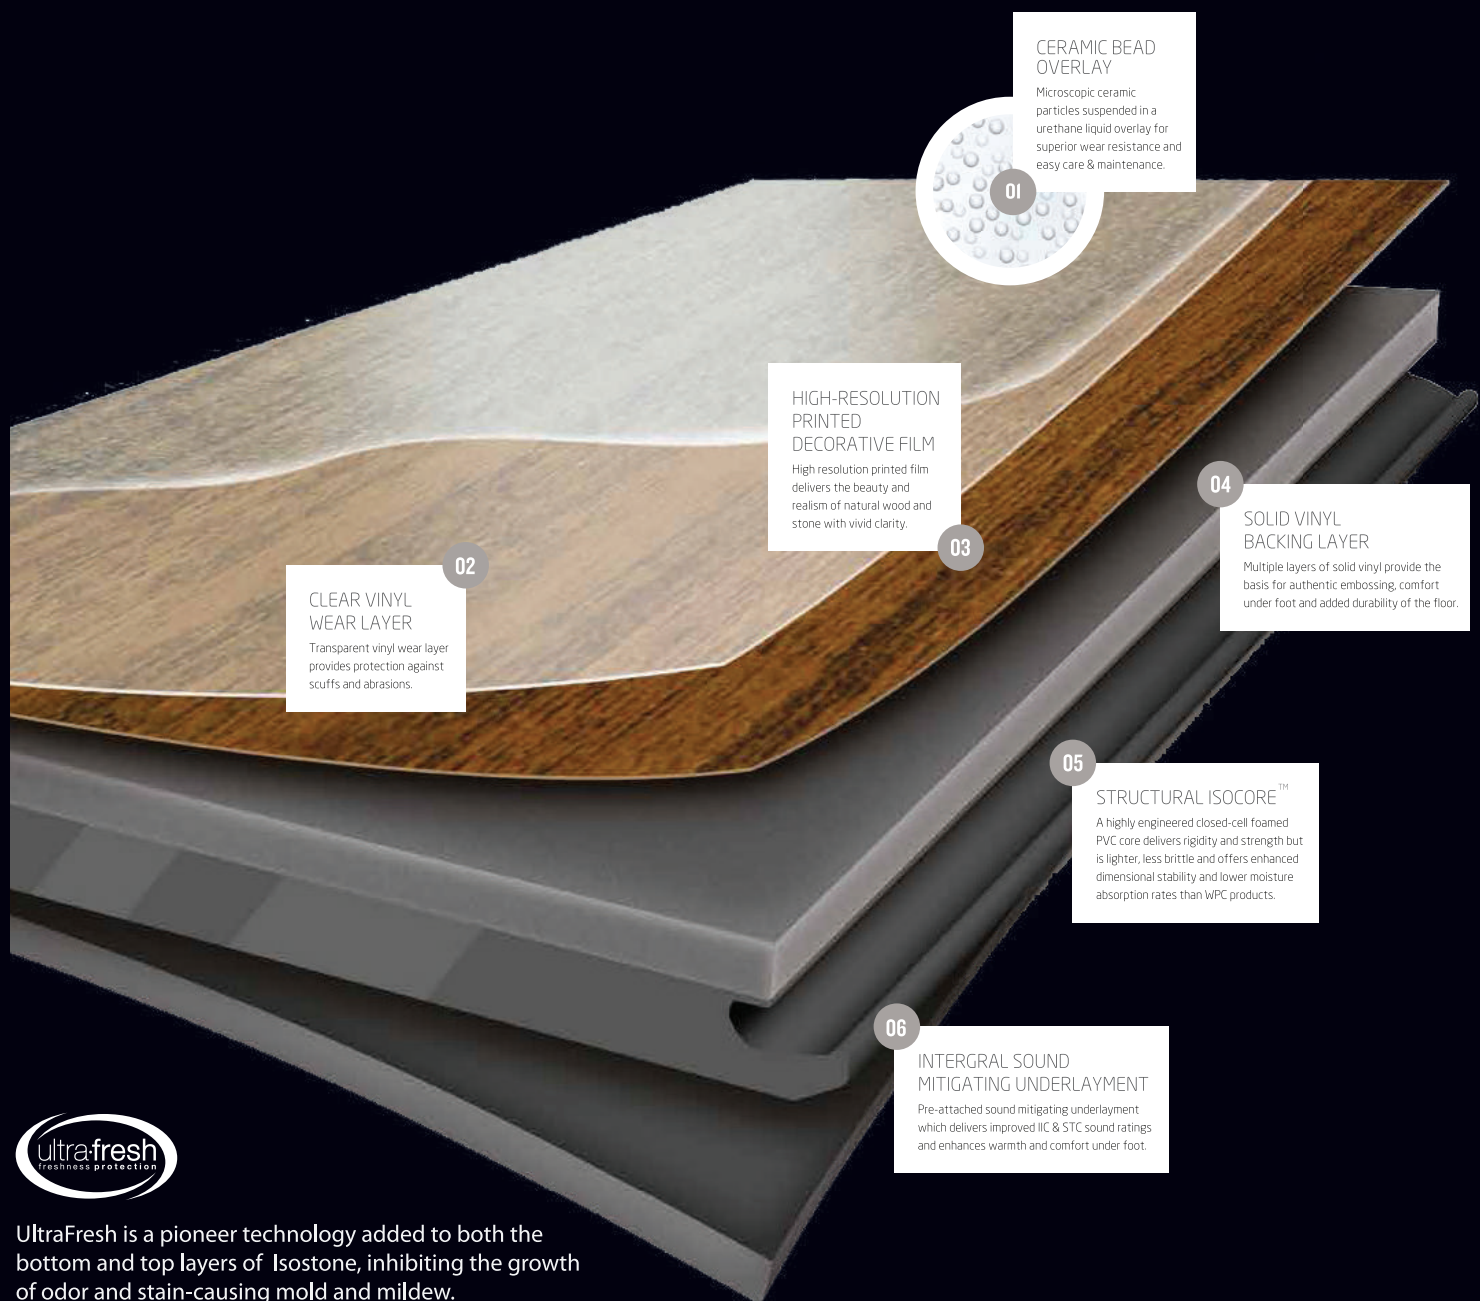

UltraFresh is a pioneer technology added to both the bottom and top layers of Isostone, inhibiting the growth of odor and stain-causing mold and mildew.

THE MOST INNOVATIVE AND LUXURIOUS VINYL FLOORING

STRONGER

Isocore is stronger than other types of vinyl plank and tile flooring. It will stand up to the threats posed by water, temperature and humidity.

LIGHTER

Heavy is not always necessarily strong or durable. Due to its patented Isocore technology, Isocore is both light and strong.

QUIETER

Whether it is for your working or living environment, you want sound improvement properties. Isocore offers quiet comfort together with its structurally integrated sublayer.

STRAIGHTER & MORE STABLE

Straight and strong by nature, Isocore simply excels at dimensional stability.

SAFER COMFORT

Strong can be soft. Isocore provides comfort together with safety.

MORE HYGIENIC

Completely sealed by Ultrafresh on the top, sides and bottom, Isocore does not allow bacteria, mites, mildew, fungus and other undesirables to inhabit your flooring.

EASIER TO INSTALL

Isocore requires less sub-floor preparation and less acclimatisation time. Isocore also allows larger size plank and tile format installations due to its light weight and rigid nature.

15 YEAR GUARANTEE
DOMESTIC

10 YEAR GUARANTEE
COMMERCIAL

ISOWOOD FLOOR PLANKS

allure[®]
ISOCORE



Swiss Oak Vernier MS127519



Dark Walnut MS60915

ISOWOOD FLOOR PLANKS



ISOWOOD FLOOR PLANKS

15 YEAR GUARANTEE
DOMESTIC

10 YEAR GUARANTEE
COMMERCIAL



Winslow Oak Grey MS129412



Natural Oak Light MS032910



Natural Oak Dark MS03298



Natural Oak Grey MS03292



Englewood Snow MS04221



Englewood Vanilla MS04223

ISOWOOD FLOOR PLANKS



Gotham Oak Grey MS107512



Gotham Oak Silver MS107514

ISOWOOD FLOOR PLANKS















Revealed Oak Oat MS04216



Revealed Oak Auro MS04215

ISOWOOD FLOOR & WALL PLANKS

| Description | Standard | Symbol | Results |
|------------------------------|--------------------------------------------------------|---------------------------------------------------------------------------------------|------------------------------------------------------------------|
| Total Thickness | 8 mm | | |
| Construction | 2 mm LVT + 4 mm ISOCORE + 2 mm IXPE | | |
| Wearlayer | 0.55 mm | | |
| Size | Floor: 220 mm x 1510 mm / Wall 457.20 mm x 914.40 mm | | |
| Edge Detail | Micro-Bevel Edge | | |
| Coating | Urethane with Enhanced Ceramic Bead | | |
| Treatment | Ultrafresh | | |
| m ² /carton | Floor: 2,66 m ² / Wall: 3.35 m ² | | |
| Limited Warranty | 10 Year Commercial / 15 Year Residential | | |
| Classification | EN 16511 |  | Commercial - Heavy (Class 33) Industrial - General (Class 42) |
| Reaction to Fire | EN13501-1 |  | B _{fl} -s1 Classification |
| Content of PCP | |  | < 5 ppm PASS |
| Formaldehyde Emission | EN 717-1 |  | Class E1 |
| Slip Resistance (Dry) | EN 13893 |  | Class DS |
| Slip Resistance (Wet) | DIN 51130 | | Grade R10 |
| Thermal Resistance | EN 12664 |  | 0.08800 m ² K/W at 10°C |
| Static Electrical Propensity | EN EN 1815 |  | Average: -6.8 kV SURPASS |
| Impact Sound Insulation | EN ISO 140-8 |  | ΔL _w = 18 dB |
| Castor Chair Resistance | EN 425 |  | PASS |
| Effect of Furniture Leg | EN 424 |  | PASS |
| Residual Indentation | EN ISO 24343-1 |  | ≤ 0.2 mm SURPASS |
| Dimensional Stability | EN ISO 239999 |  | ≤ 0.25% SURPASS |

- ◆ CAN BE INSTALLED OVER CERAMIC TILES WITH GROOVES
- ◆ SOUND INSULATING UNDERLAYER
- ◆ 2 MM LVT + 4MM ISOCORE + 2MM UNDERLAYER (TOTAL 8MM THICKNESS)
- ◆ LUXURY PLANK SIZE 220 MM X 1510 MM

