







2.0/0.3mm K6122-01 2.0/0.55mm K6222-01 Lighting (Maple)



2.0/0.3mm K6122-02 2.0/0.55mm K6222-02 You better (Maple)



2.0/0.3mm K6122-03 2.0/0.55mm K6222-03 Smokin (Maple)



2.0/0.3mm K6126-01 2.0/0.55mm K6226-01 Sepia (Walnut)



2.0/0.3mm K6123-01 2.0/0.55mm K6223-01



Like a rock (Oak) 2.0/0.3mm K6123-04 2.0/0.55mm K6223-04 Bona fide (Oak)

TIMBERLINE® Heterogeneous Vinyl Sheet



2.0/0.3mm K6123-06 2.0/0.55mm K6223-06




2.0/0.3mm K6123-02 2.0/0.55mm K6223-02



2.0/0.3mm K6122-04 Knock on wood (Maple) 2.0/0.55mm K6222-04

AVAILABLE

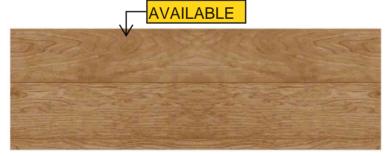





2.0/0.3mm K6123-03 2.0/0.55mm K6223-03

TIMBERLINE® Heterogeneous Vinyl Sheet



2.0/0.3mm K6123-05 Golden side (0ak) 2.0/0.55mm K6223-05



2.0/0.3mm K6127-02 2.0/0.55mm K6227-02



2.0/0.3mm K6123-07 2.0/0.55mm K6223-07



2.0/0.3mm K6126-04 2.0/0.55mm K6226-04

Coffee bean (Walnut)



Level headed (Oak)

2.0/0.3mm K6122-05 2.0/0.55mm K6222-05



2.0/0.3mm K6126-03 2.0/0.55mm K6226-03

Char brown (Walnut)

Thunder (Maple)

TIMBERLINE® Heterogeneous Vinyl Sheet






2.0/0.3mm K6122-06 2.0/0.55mm K6222-06

Cabernet (Maple)



2.0/0.3mm K6127-03 2.0/0.55mm K6227-03

Cerise (Cherry)

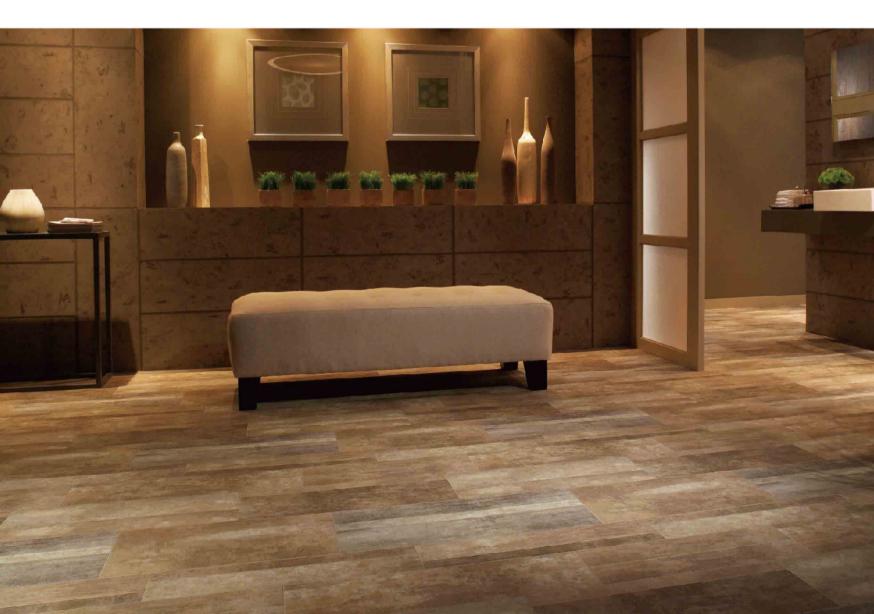

Inspiring Great Spaces™



Technical Data			
Characteristics	Standard	Unit	Result
Type of flooring	ISO 10582 / EN 649		Heterogeneous Vinyl Sheet
Surface treatment			PUR
Pattern			Wood
Safety criteria			
Flammability	GB 8624-2012	class	B1
Slip resistance	DIE 51130	group	R9
Dynamic coefficient of friction	EN 13893	class	DS
Limit of harmful substances	GB 18586		PASS
Performance behaviour			
Roll dimentions	ISO 24341 / EN 426	m	2.0m×15/20m
Overall thickness	ISO 24346 / EN 428	mm	2.0
Thickness of wear layer	ISO 24340 / EN 429	mm	0.3/0.55
Residual indentation	ISO 24343-1 / EN 433	mm	0.02
Dimensional stability	ISO 23999 / EN 434	%	< 0.4
Wear resistance	EN 649	group	Т
Color fastness	ISO 105-B02	rating	≥6
Castor Wheel Test	EN 425		Suitable
Chemical resistance	EN 423		No stain 0
Classification			
Commercial very heavy	ISO 10874-EN 685	class	Class 31/33
Additional property			
Castor chair 🚭 🗸		Underfloor heating	1
Antistatic behavious 🚱 🗸		Chemical resistance	1

























Sample piece in this sample folder is only for color reference, the structure of which may be varied in actual product supplying.

WWW.armstrongflooring.asia

TEL: F

 Hong Kong
 (852) 2585 7800
 (852) 2598 7181

 Singapore
 (65) 6604 6836
 (65) 6604 6835

 Malaysia
 (60) 379 323 331
 (60) 379 606 331

 Indonesia
 (62) 21 2965 7866
 (62) 21 2965 7867

















