




Wood You Like

Barlinek floors in harmony with nature

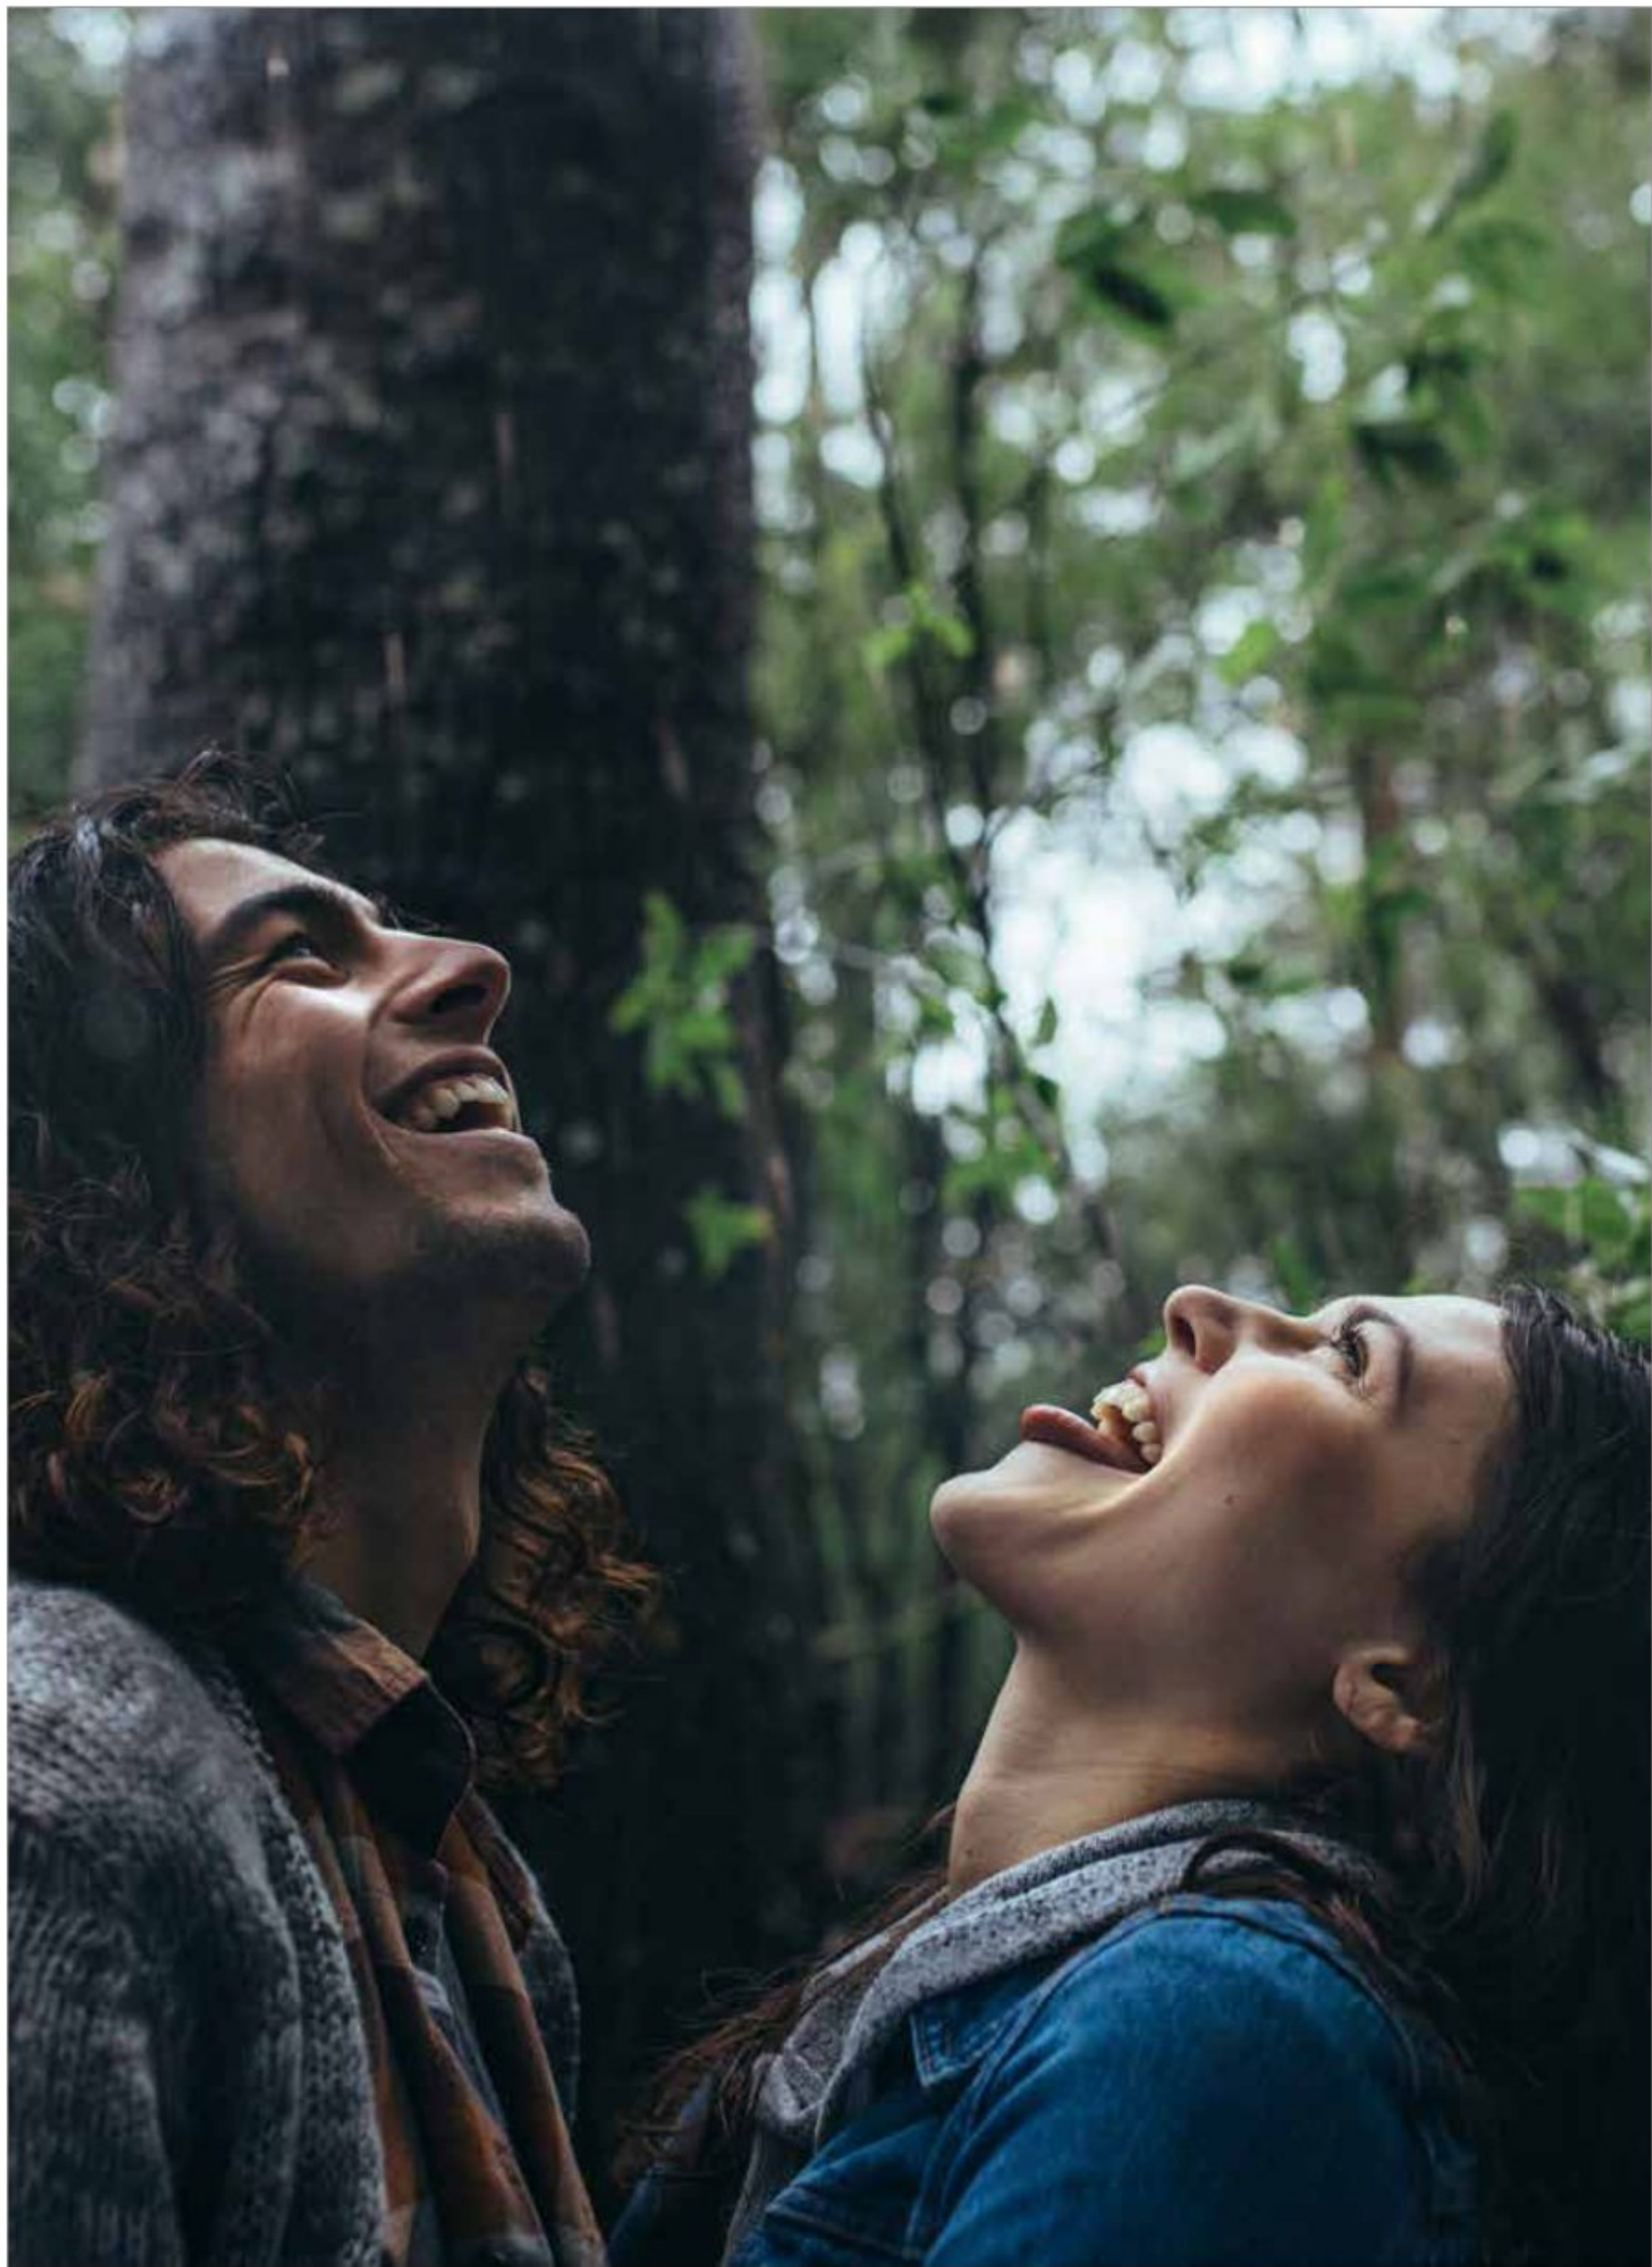

Keep your ears to the ground

Ecology	4-5
Barlinek Institute of Design	6-7
History	8-9
100% wood	10-11
Flooring construction	12-13
Benefits of Barlinek floors	14-17
Stable construction	18-19
The Barlinek Group	20-21
Chevron	22-45
Herringbone	46-119
Light colours	120-155
Natural colours	156-203
Dark colours	204-241
Barlinek wood flooring on wall	242-243
Barlinek wood board dimensions	244-245
Flooring classification	246-247
Floor finishing	248-249
Installation methods	250-251
Skirting boards	252-255
Special skirting boards	256-257
Floor care and protection	258-259



Environmental concern
and a pro-ecological
attitude are paramount
values of the brand

We have planted over 17 million trees



We plant trees

For every pack of Barlinek flooring sold, we plant 1 tree. Barlinek's Customers Forest is growing in Poland, Romania and Ukraine and today includes more than 17,000,000 trees!



We save falcons

We co-finance a scheme to restore the tree-dwelling population of the peregrine falcon. Thanks to the activity undertaken over the past few years it has been possible to return as many as 55 of these beautiful birds to the forests.



We protect „Bartek” the Oak

We also allocate funds to carry out the necessary renovation work to save the ancient Bartek Oak - Poland's most famous monument to nature.



Barlinek's green policy

Environmental concern and a pro-ecological attitude are paramount values of the brand. It is in nature that we find our inspiration, where we obtain the raw materials for manufacturing and it is out of concern for it that we conduct a varied programme of ecological activities.

Responsibility

The raw materials used in production are derived exclusively from sustainable forestry areas, which is confirmed by the prestigious Forest Stewardship Council® (FSC) Certificate.





Barlinek Institute of Design

BIOD

Barlinek Institute of Design is a platform for architects that dedicates support by our professional consultants, it prioritises service allowing access to the data base of our products (CAD textures).

Barlinek Institute of Design also organises periodical free training to architects in many polish cities and also at our factory in Barlinek.

We also organise an international competition "Creations of Nature", as well as take part in the most important design festivals in Poland and the rest of the world. We show wood as a raw material which accompanies us in everyday life, sometimes in a way that is not obvious but quite surprising.



We make the Barlinek flooring and skirting boards from the purest part of the log. Sawdust formed during production is used to make pellets and biomass.

Entirely made of wood

We use 100% of raw material

Barlinek is the only wood floor maker in Europe with the whole production process concentrated in one site. This guarantees full quality control at every stage of production, as well as the most economical consumption of such a valuable raw material as real wood. Barlinek tries to make 100% use of it.

Real Wood

Real Wood is non-allergenic, permanent and durable, warm to the touch, convenient to use, unique and enhances home comfort.

Barlinek floorboard*

It's 100% real wood, a stable structure resistant to changes in temperature and moisture, suitable for underfloor heating, fast and independently installed, lends itself to multiple renovations*, top quality at a fair price.

* For detailed information on the installation and use of the Barlinek flooring, please refer to the installation manual and your warranty.

Flooring construction



1 The 5Gc Barlock System

Faster and easier installation also in places difficult to access. Simple installation of angularly cut flooring. No additional tools required.*

2 The Barclick® joint

Fast and easy with the use of an Standard installation kit. High durability of the joint.

3 Wood protection system

Up to 7 layers of UV-cured acrylic lacquer or a system of UV/natural oil.

4 Surface layer

Selected European wood of the appropriate thickness, protected with a lacquer or oil finish.


5 Middle layer

Coniferous layer arranged laterally to the surface and a bottom layer. Such construction limits the natural movement of the wood and prevents gaps, cracks and squeaking – even in constantly changing weather conditions.

6 Bottom layer

Coniferous wood arranged laterally to the middle layer reduces the natural work of wood.

* For detailed information on the installation and use of the Barlinek flooring, please refer to the installation manual and your warranty.

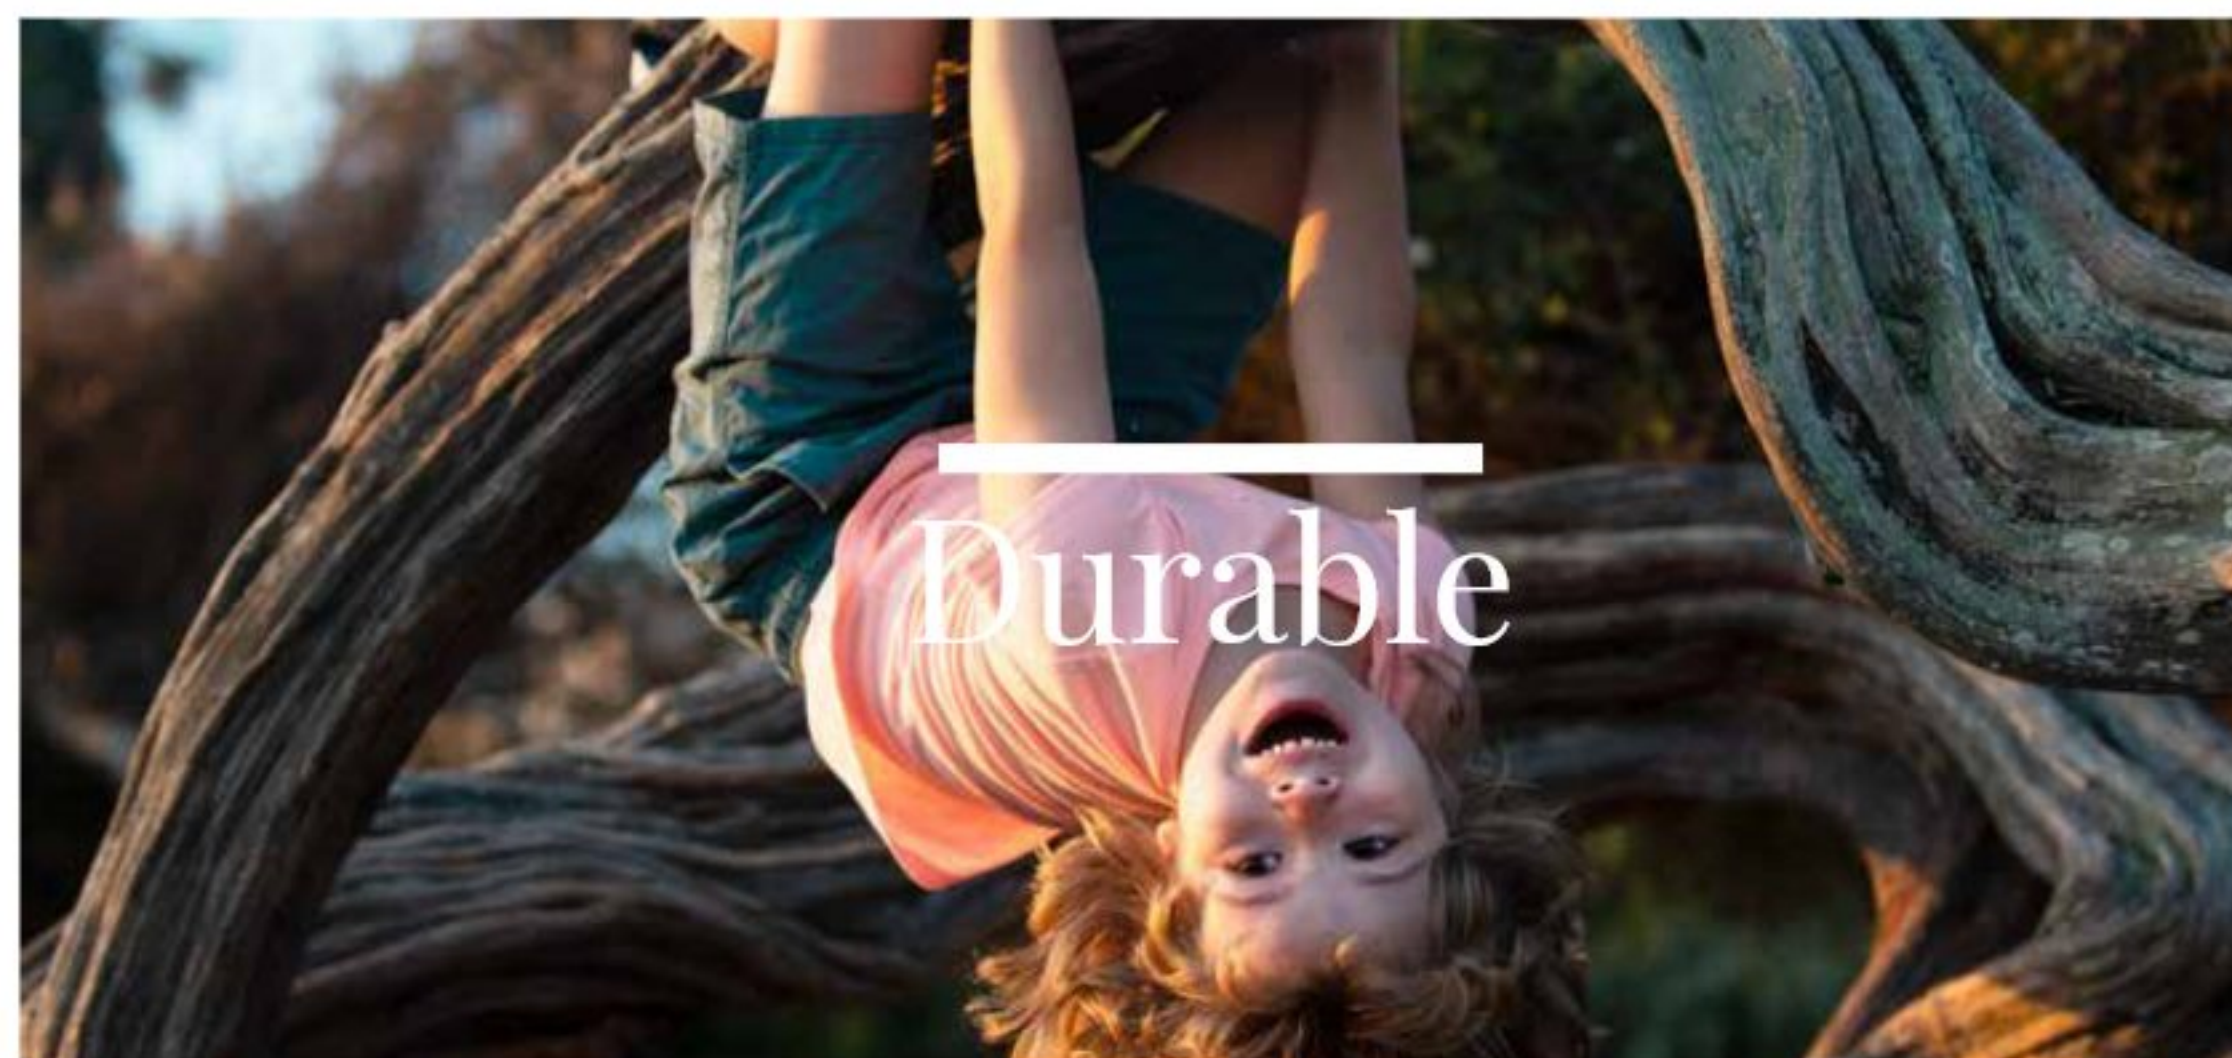

Benefits of Barlinek floors



100% wood

Flooring is made of 100% real wood of the highest quality. We use 100% of this precious material. The sawdust remaining after production is used to make wood pellets and fireplace briquette. The bark is used in our gardens.



Stable construction

The thickness of each layer of the Barlinek flooring is not selected by chance. It is the result of many years of experience, hundreds of hours of research and tests of the natural wood properties. Our expert knowledge has enabled us to develop a floor with an ideal construction to reduce the natural tensions of the material.



Underfloor heating

Not every wood floor is suitable for underfloor heating. Thanks to its layered structure, the Barlinek flooring perfectly conducts heat and can be successfully applied on both electric and water underfloor heating.



100% WOOD

The Barlinek wood floor is made of 100% natural wood of high quality.



STABLE CONSTRUCTION

A cross-layered design of the Barlinek wood floor is highly resistant to air humidity changes, which limits the wood creaking, swelling and drying.



UNDERFLOOR HEATING

Thanks to its cross-layered structure, the Barlinek floor is perfect for conducting heat and can be used on both electric and water underfloor heating.



RESISTANCE TO ABRASION*

A Swedish test has confirmed that Professional grade lacquer is more resistant to abrasion and stains than floors from leading European producers!



SAFETY

Our floors meet all stringent European health protection standards.



UNIQUE

Wood simply cannot be imitated as its structure is very unique.



QUICK INSTALLATION

Thanks to our glue-free joints you can lay the floor yourself, quickly and without unnecessary tools.



WARM TO THE TOUCH

Wood in itself is a material that is always warm to the touch.



SILENT FLOOR

A subfloor system or gluing the floorboards to the subfloor helps to absorb the noise.



VARIETY OF PATTERNS

There are 450 products in over 40 different color ranges, in various sizes and arrangement options.



COMPLETE SYSTEM

Skirting boards, threshold and stair slats, expansion masking strips and rosettes. Clips for attaching boards to wall and fitting skirting boards and slats.



FLOORING THAT CAN BE RENOVATE

The Barlinek floorboard with a heavily worn surface layer can be sanded down and re-coated with lacquer or oiled.

* See selected products

Even more advantages



A reliable product

Providing customers with the highest quality wood floors is our goal. We achieve this with comprehensive quality control in its broad sense at every stage of production, from the design of the layer board, to raw material control, technological process, to production and final quality control of the finished product.

Wooden layered floorboard

Bonding the top layer made of hard solid wood like oak, ash or beech with two pine layers at 90 degrees makes it a 100% wood, natural and durable floor.

Warranty up to 30 years

Engineered Wood Flooring is a product that will last for many years. More information on www.barlinek.com

* For detailed information on the installation and use of the Barlinek flooring, please refer to the installation manual and your warranty.



Autumn-winter
heating period
dries the air



Spring-Summer
high humidity
air

Tame the forces of nature!

Dimensions up to 10 times more stable

Our climate is a real challenge for the floor. Natural wood's moisture content will vary depending on the weather outside. Due to this, traditional wood floors tend to swell, squeak or dry out causing gaps to appear. But this does not apply to the Barlinek wood floors! Our floorboards are made not from just one, but three layers of real wood arranged in a cross structure. The cross construction reduces natural tension and compression of wood, provides a balance between the layers of the board, and thus guarantees the stability of the floor, even under changing weather conditions outside.

Perfect construction

The Barlinek wood floors consists of not just one, but three layers of real wood arranged in a modern cross construction. The Barlinek wood floors layered structure ensures the floor's stability and enables the forces of nature to be tamed as effectively as possible. It is perfectly suited for underfloor heating.

* For detailed information on the installation and use of the Barlinek flooring, please refer to the installation manual and your warranty.



—
Lightness

The effect of a vast space

Interiors decorated with bright flooring will seem to the inhabitants more spacious and optically larger. What's more, light shades give the interior a transparent, timeless look.



width 207 mm, length 2200 mm, brushed, matt lacquer



Oak Cappuccino
Molti

3WG000642

Wood features scale of intensity





width 207 mm, length 2200 mm, matt lacquer

The characteristic white colour of the wood is achieved by bleaching. The Bianco Multi Oak floor is built from 3-strip boards finished with matt lacquer.



Oak Bianco
Molti

3WG000645

Wood features scale of intensity





width 180 mm, length 2200 mm, bevelled, brushed, matt lacquer

Oak floor with a characteristic light hue, obtained by bleaching the wood. The floor has undergone brushing and micro bevelling, which emphasises the natural qualities of the floor. Finished with matt lacquer.



**Oak Bianco
Grande**

1WG000700

Wood features scale of intensity





width 180 mm, length 2200 mm, bevelled, brushed, matt lacquer

Plain floorboard stained a cream hue and covered with matt lacquer. The natural wood texture is emphasised with brushing.



Oak Nude
Grande

1WG000672

Wood features scale of intensity





width 207 mm, length 2200 mm, brushed, matt lacquer



Oak Marzipan Muffin
Molti

3WG000644

Wood features scale of intensity



Grey stained boards finished with matt lacquer, enhance the natural texture of the wood by brushing.

barlinek.com



width 180 mm, length 2200 mm, brushed, matt lacquer

A light coloured oak floor, protected with matt lacquer. Additional brushing and bevelling emphasise the natural grain of the wood.



Oak Almond
Grande

1WG000283

Wood features scale of intensity





Character

Bring out the depth

Dark floors are a great starting point to creating contrasting arrangements. They compose very well with bright walls and colourful add-ons.



width 207 mm, length 2200 mm, brushed, matt lacquer

Affogato Multi Oak is a 3-strip board. It obtains its original appearance from dark staining and the brushing process. The wood is protected with matt lacquer.



Oak Affogato
Molti

3WG000649

Wood features scale of intensity





width 180 mm, length 2200 mm, brushed, matt lacquer

A floorboard characterised by its distinctive graining and the natural colour variation. The floorboard is dark brown stained and protected with semi-matt lacquer. The texture of the wood is emphasised by brushing.



Dark Floors

Ash Coffee
Grande

1WG000676

Wood features scale of intensity





width 207 mm, length 2200 mm, brushed, semi-matt lacquer



Ash Coffee
Molti

3WG000653

Wood features scale of intensity



The Coffee Molti floor was given its character by the brushing process. Ash, naturally hard is here additionally protected by semi-matt lacquer.

barlinek.com



width 155 mm, length 2200 mm, microbevelled, brushed, semi-matt lacquer

Plain oak floor with dark brown colour. Its character is enhanced by brushing. The edge of the boards is underlined by microbeveling and the whole surface is protected with matt lacquer.



Oak Garda
Medio

1WG000793

Wood features scale of intensity





width 130 mm, length 2200 mm, microbevelled, matt lacquer

Nugat Piccolo Oak's dark brown colour and 4-sided bevelling make it reminiscent of a traditional floor. The wood has been additionally protected with matt lacquer.



Oak Nugat
Piccolo

1WG000729

Wood features scale of intensity





width 207 mm, length 2200 mm, brushed, matt lacquer

The Honey Multi stained board is composed of 3-strip elements to form a uniform surface. The natural structure of the wood has been brought out by brushing and matt lacquer finishing.




Oak Honey
Multi

3WG000647

Wood features scale of intensity



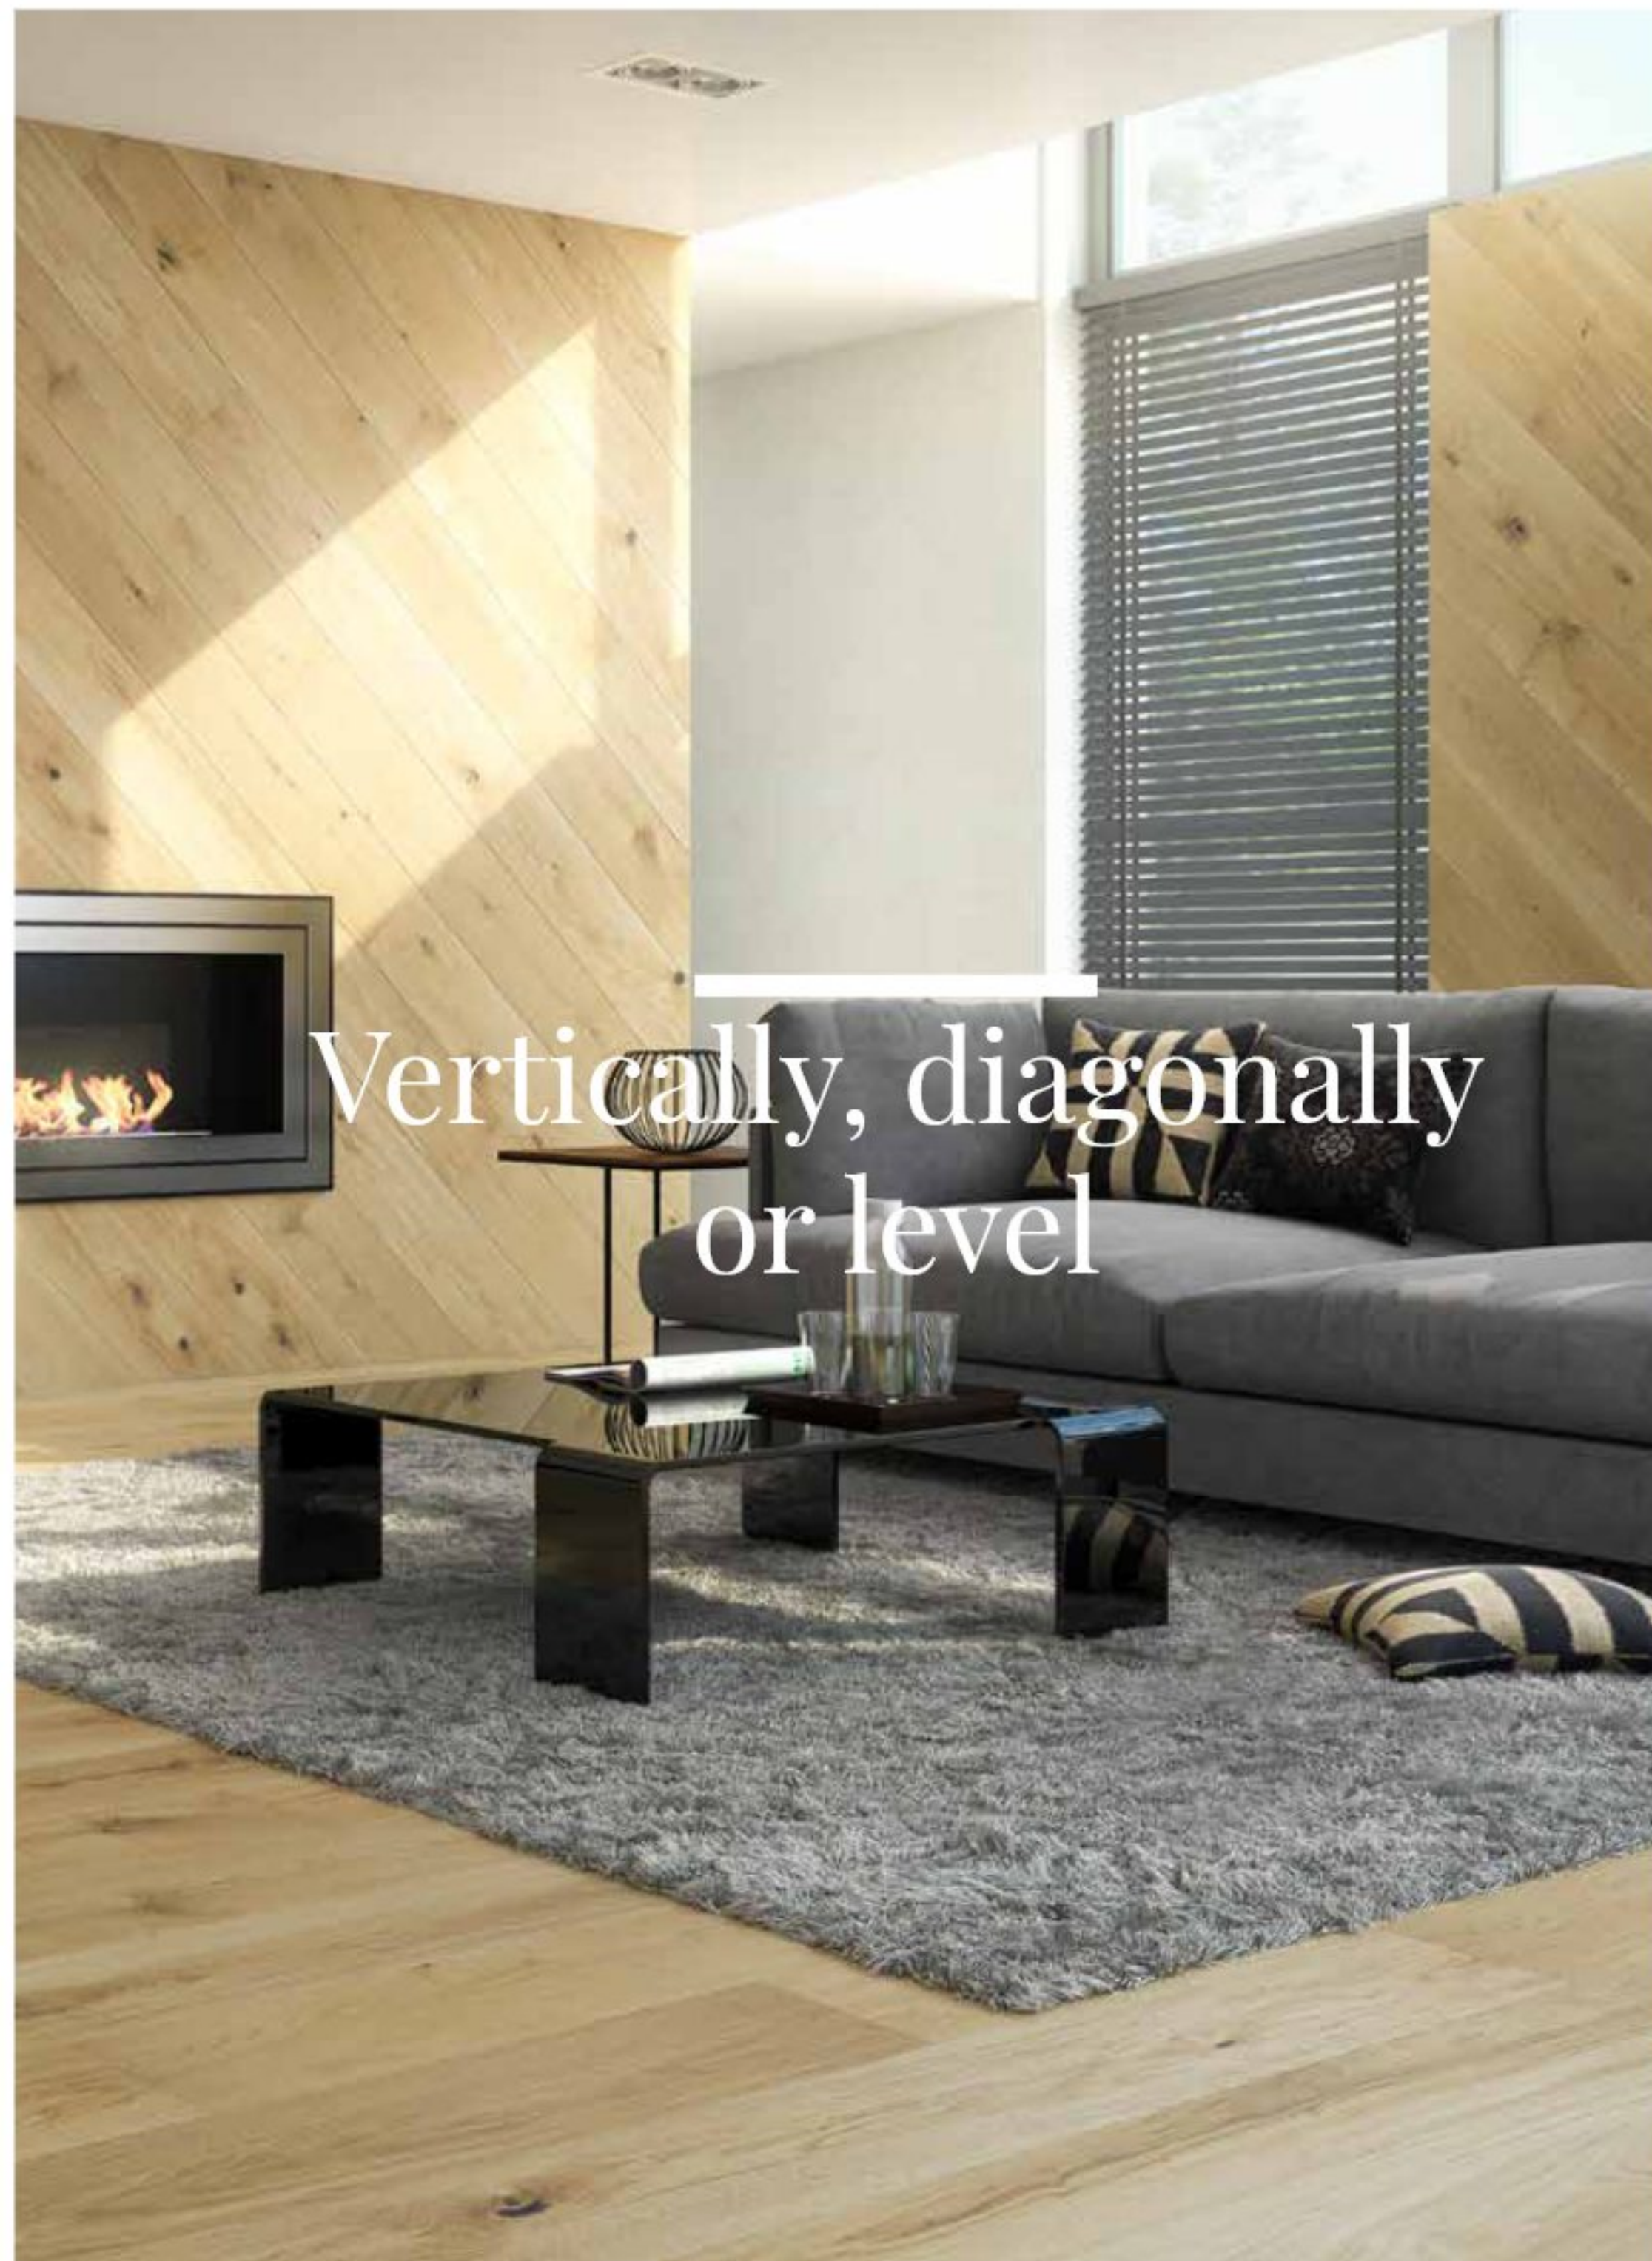

Vertically, diagonally
or level

Barlinek floors on the wall

Floor on the wall: visually exquisite and in line with the current design trends. Arrange it in any way you like - over the entire wall or cover only a part of your wall.



Clip for attaching floorboard to a wall A metal mounting clip enabling quick, safe and easy mounting of any 14 or 15 mm thick multi-layer Barlinek flooring to the wall.



Classico line

A class of its own.

The natural floor, arranged in a timeless pattern of Chevron and classic herringbone, fits into any style of interior. Chevron pattern gives the rooms an elegant character. Herringbone pattern is intended for people who value tradition and at the same time focus on modern design.



PURE line

Wood in its purest form.

The highest quality plain boards with a width of 180 mm or 155 mm, lacquered or oiled. It is an exclusive and the most effective way to showcase the natural beauty of wood.



DECOR line

The latest trends in colour.



For those who appreciate modern design and original colours. Floorboards with a width of 180 mm and 155 mm stained in the most fashionable shades are perfect for seekers of avant-garde solutions.



Life line

The beauty of wood, unrivalled durability.

The 207 mm wide three-strip floorboards of exceptional durability ensured by a highly resistant lacquer - a two-time winner of the international abrasion and stain resistance test and 130 mm wide plain floorboards.

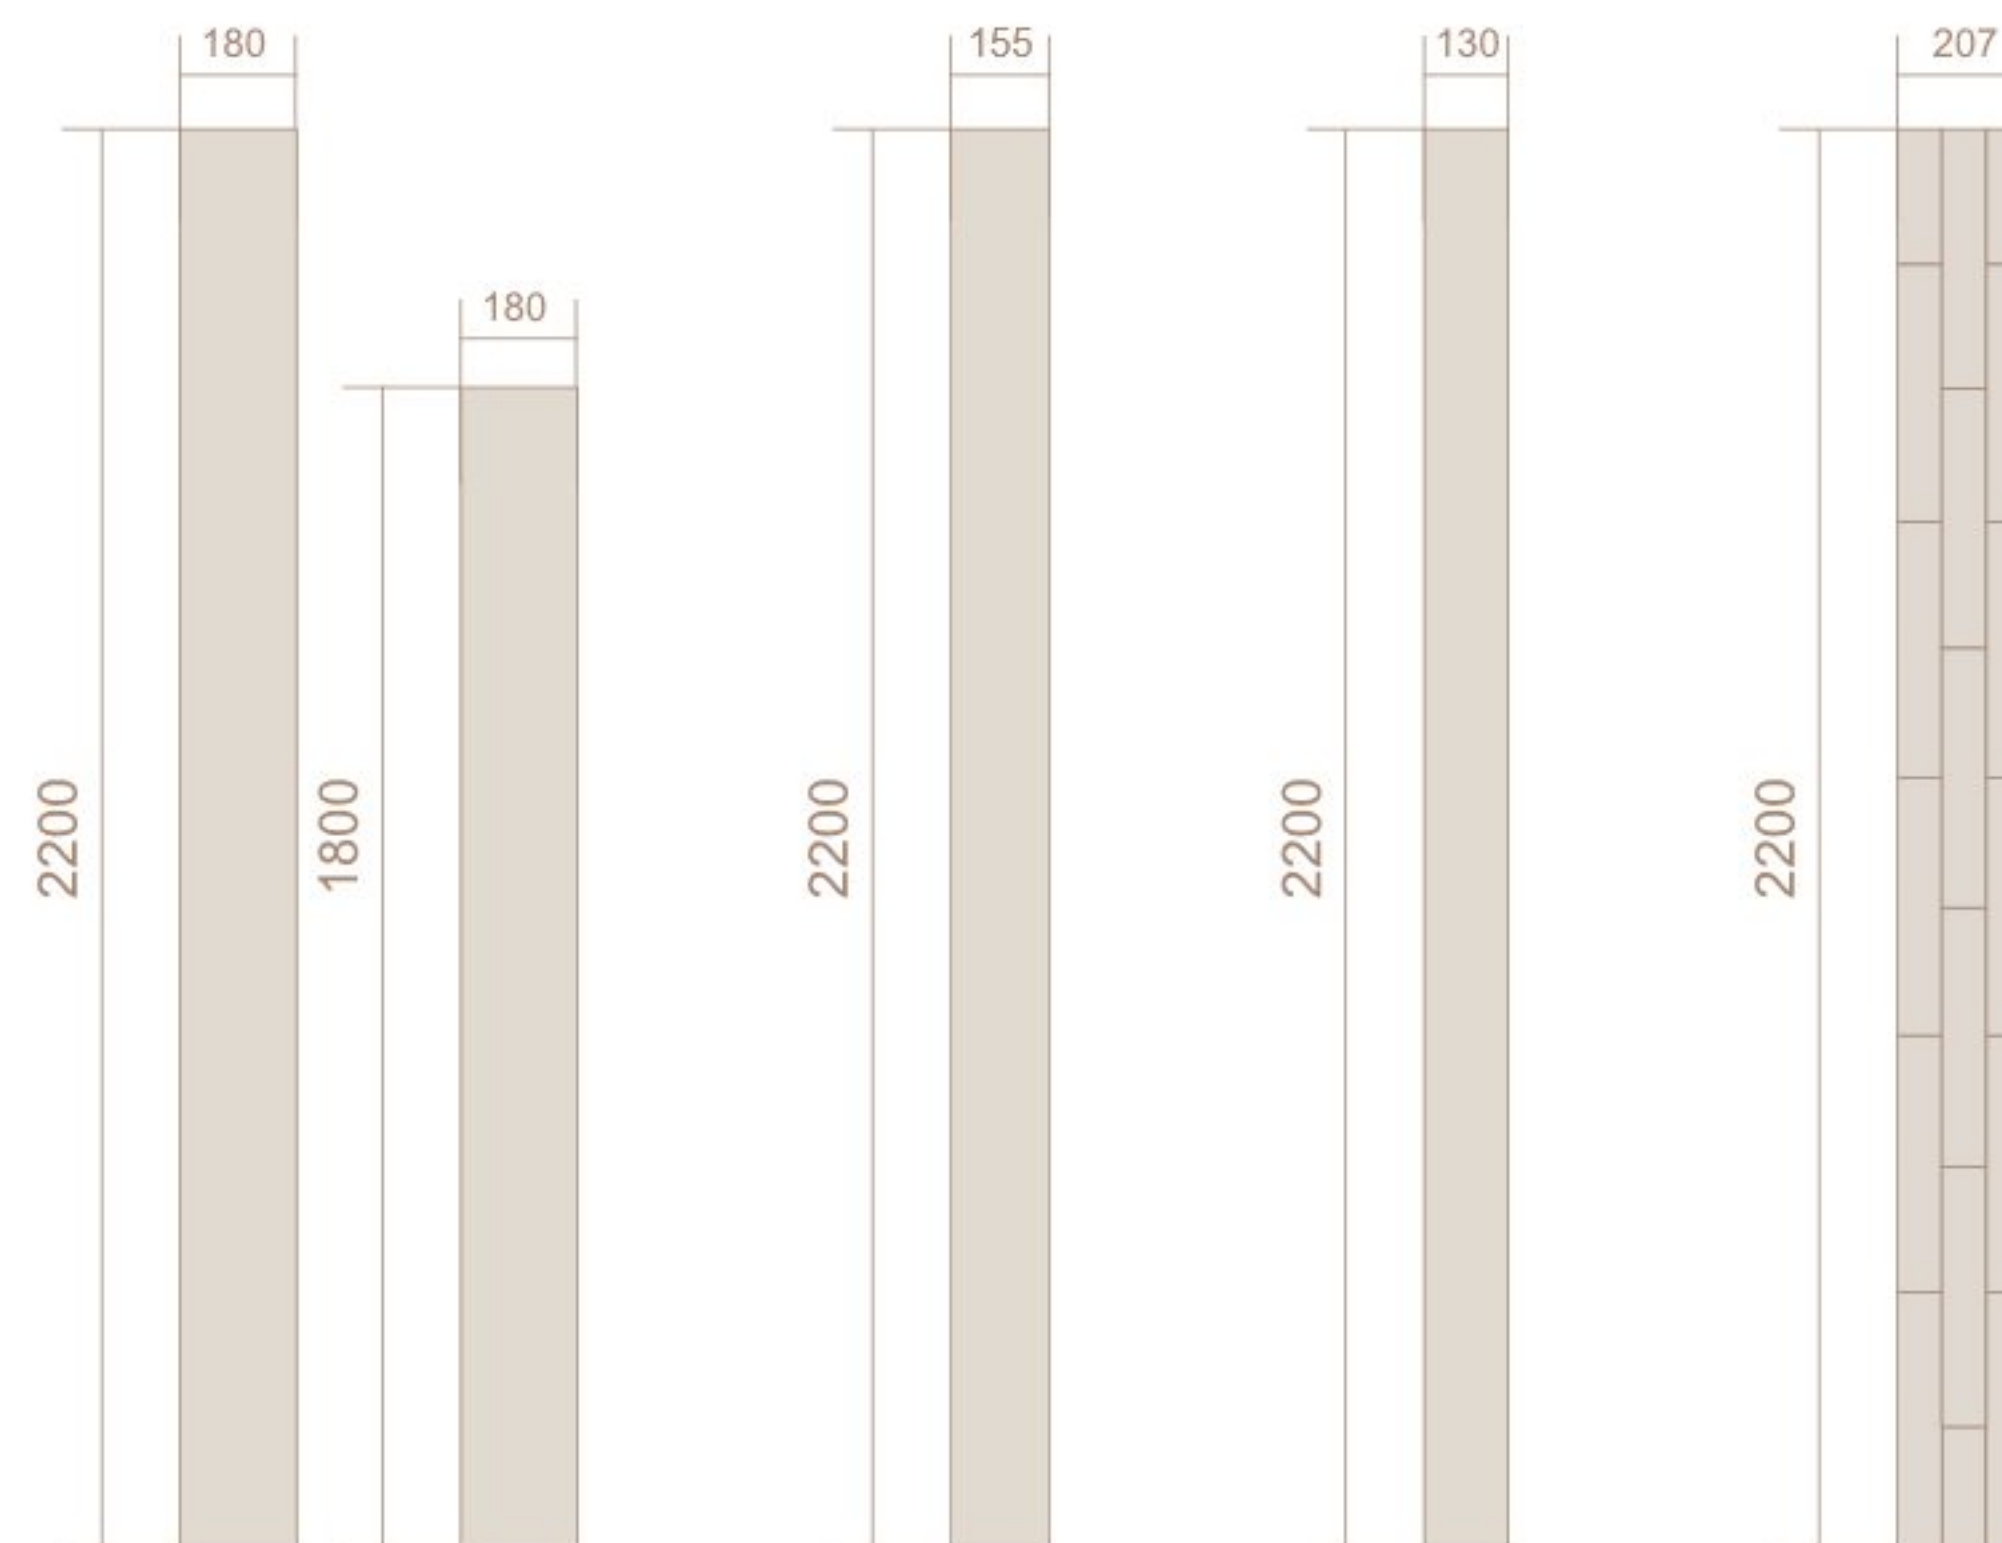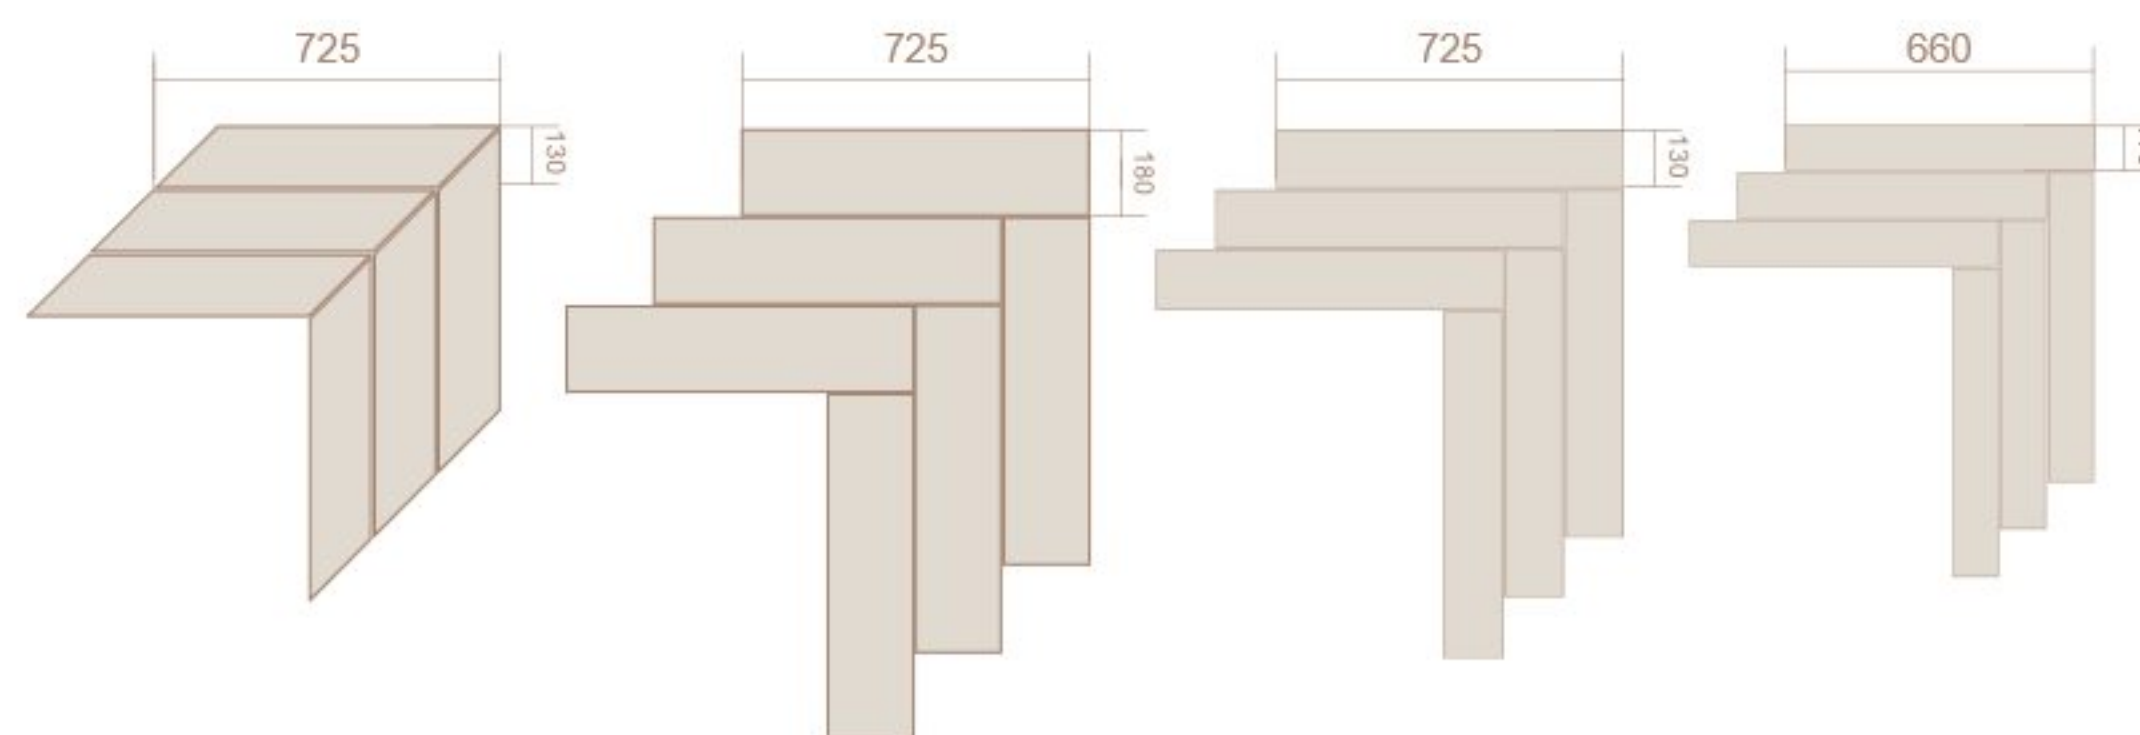

GRANDE 180

The 180 mm wide, 2200 mm long and 1800 mm long plain floorboards. Floorboards of this size can be found in the PURE and Decor series.

MEDIO 155

Plain floorboards, 155 mm wide and 2200 mm long. Floorboards of this size can be found in the PURE and DECOR series.

PICCOLO 130

Plain floorboards with a width of 130 mm are available in three lengths 2200 mm. Floorboards of this size can be found in the LIFE series.

MOLTI 207



Three-strip floorboards, 207 mm wide and 2200 mm long. Floorboards of this size can be found in the LIFE series.





A very large quantity ●●●●●
 Large quantity ●●●●●
 Moderate quantity ●●●●●
 Small quantity ●●●●●

Wood features scale of intensity

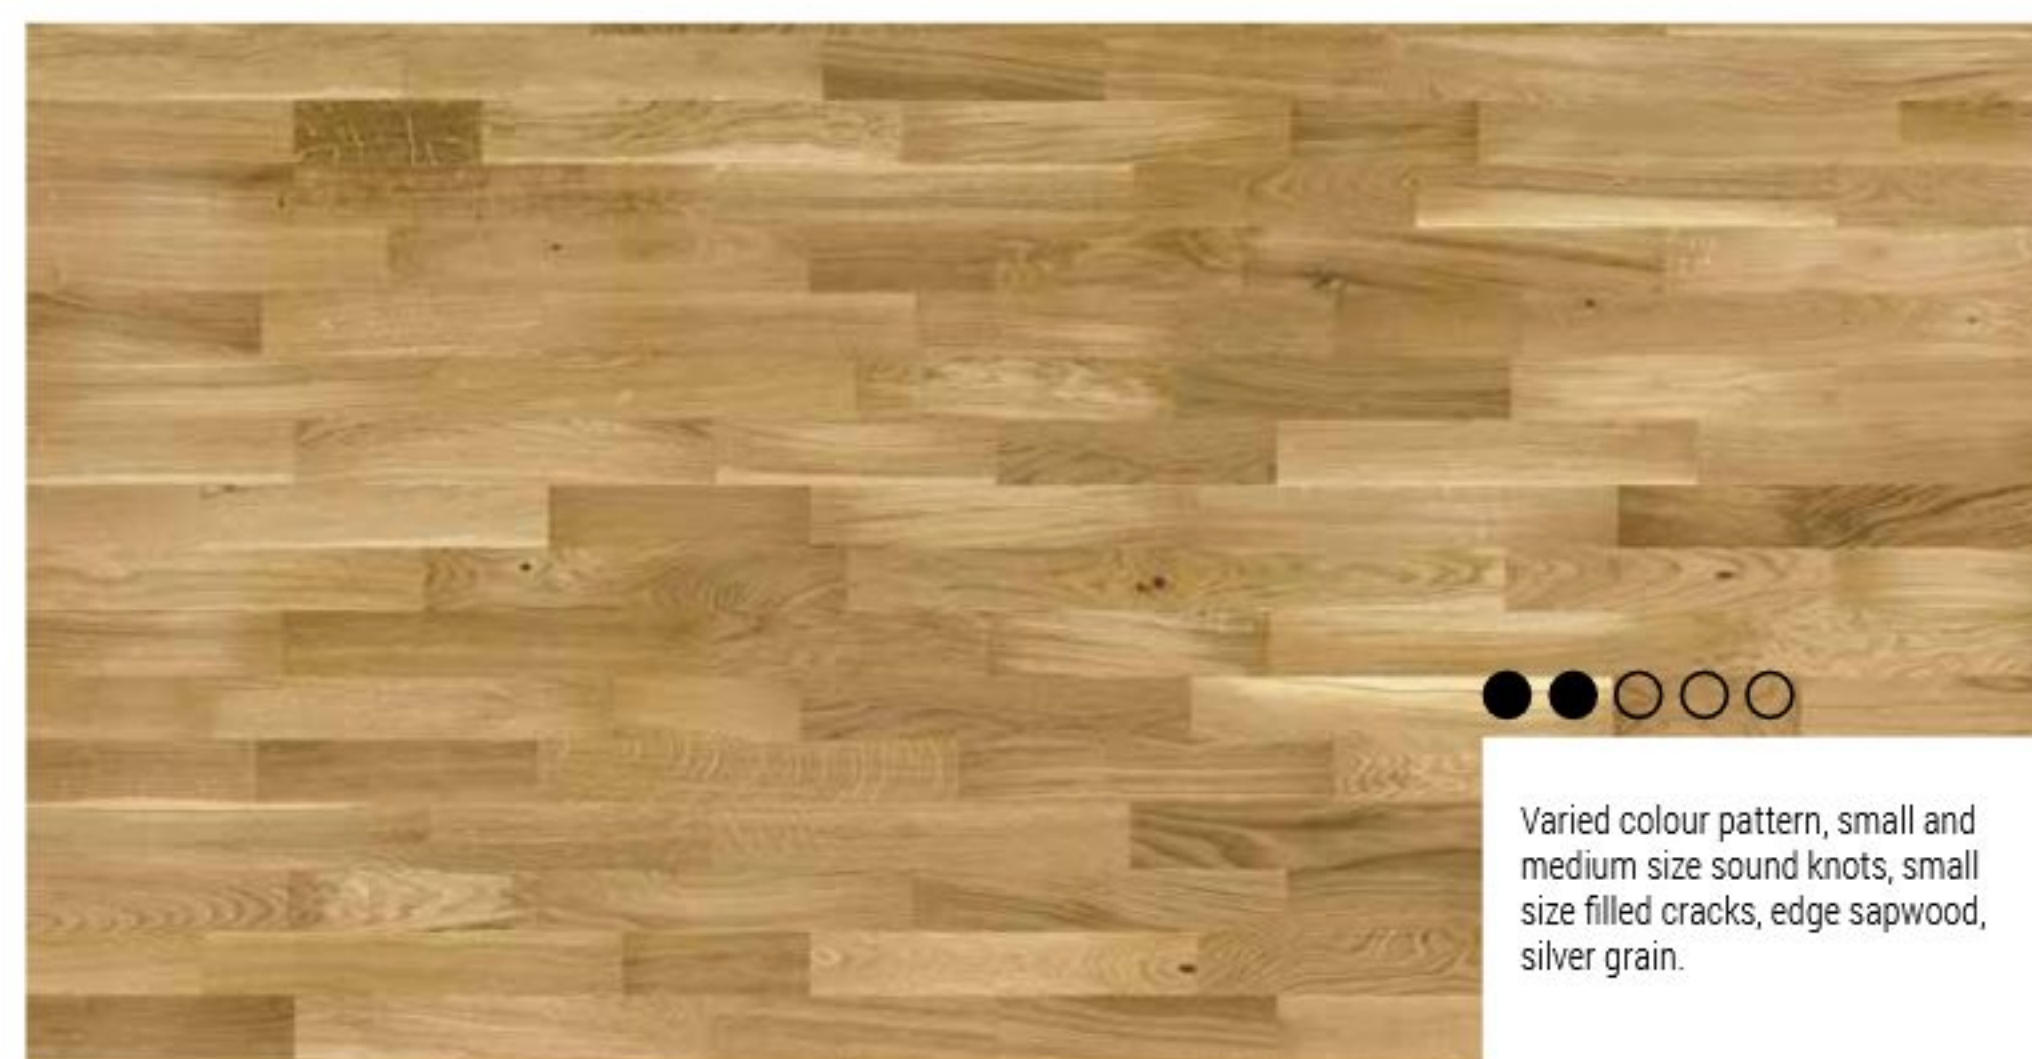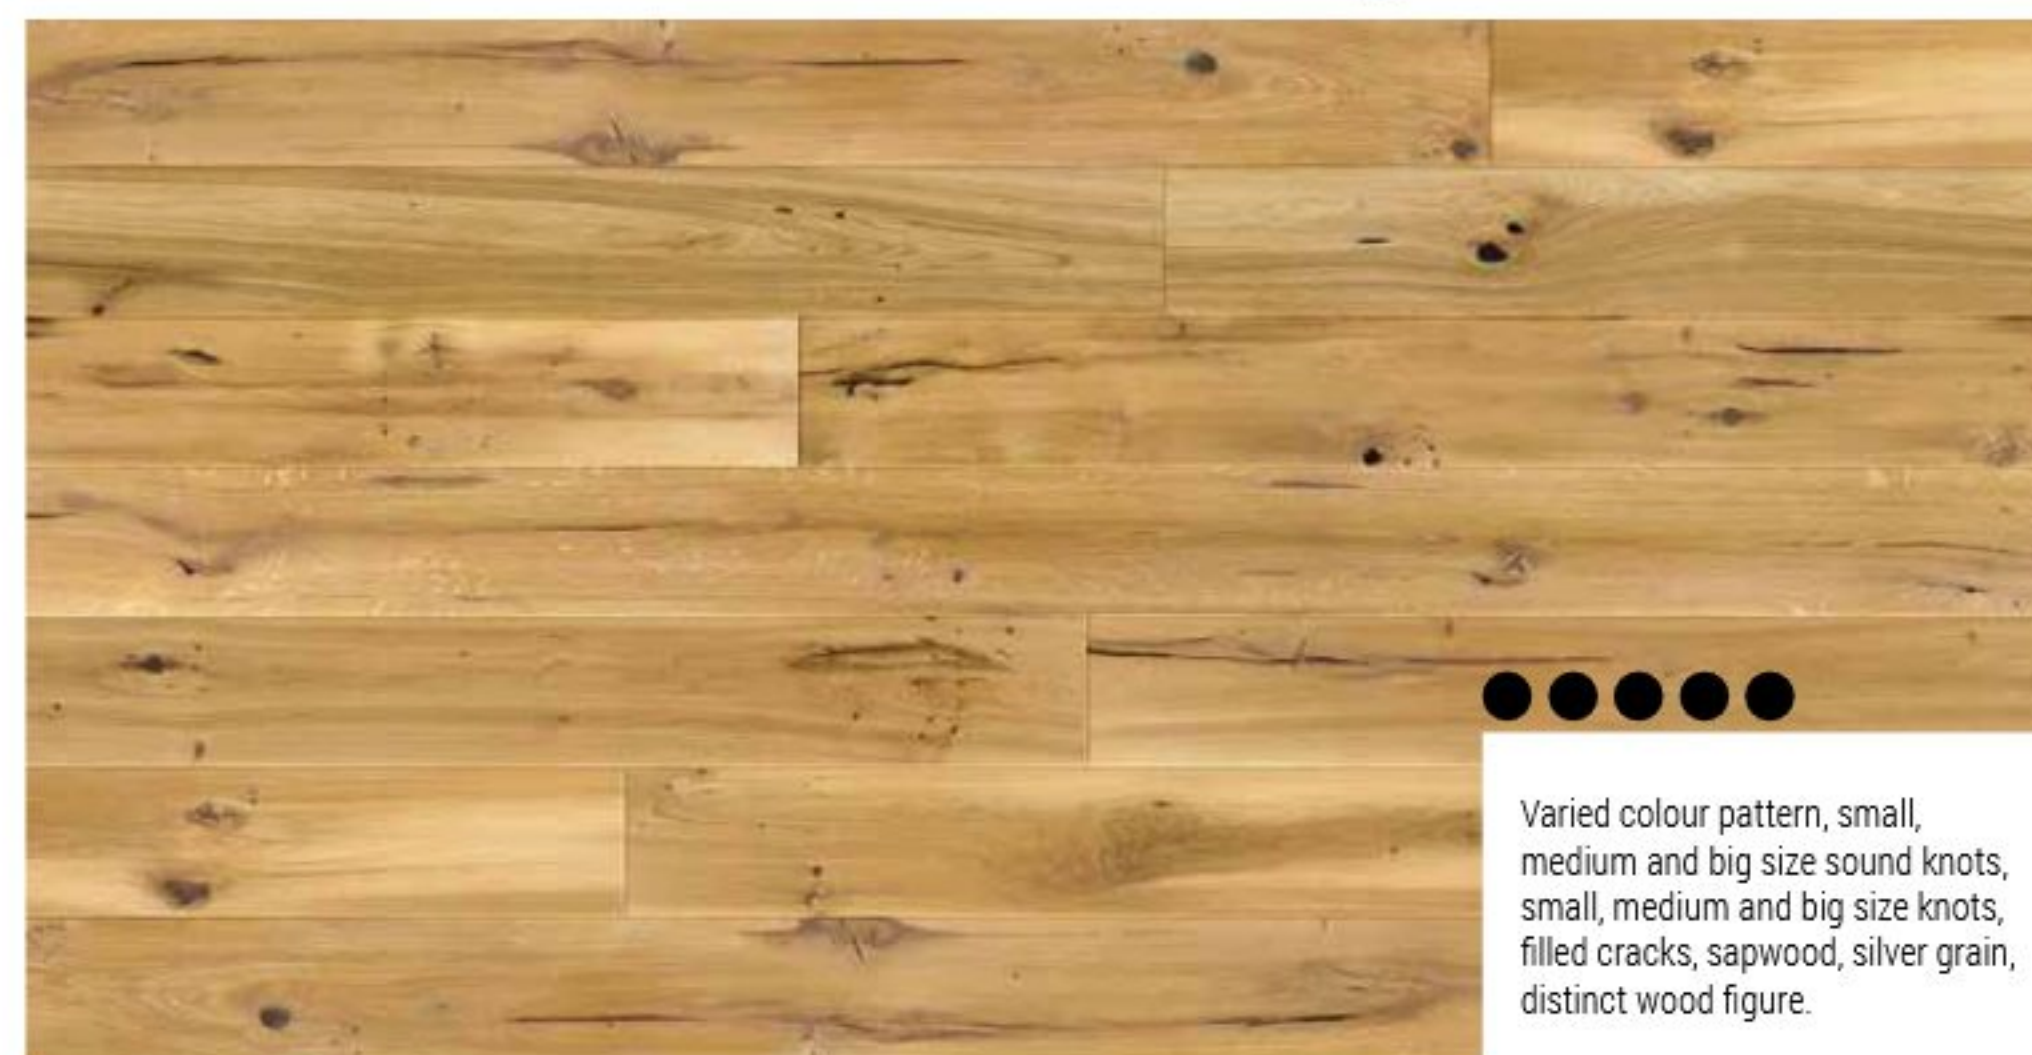

Oiled floors




Natural oil

Natural oil penetrates the pores of the wood, impregnating it against moisture and bringing out the natural features of the wood.



The natural oil structure

The process of oil absorption by the structure. The oil hardens in contact with oxygen.

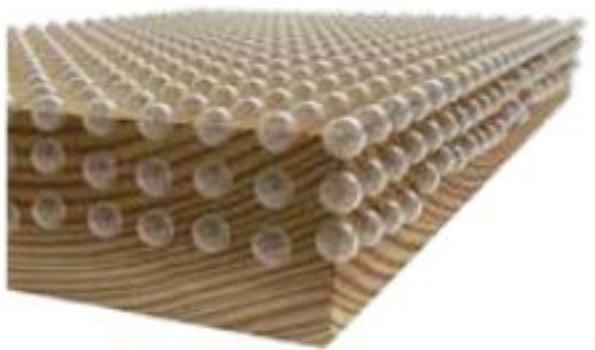


UV oil

UV oil forms a protective oil coating on the surface of the wood and increases the floor's resistance to dirt.



The UV-oil structure

The UV-oil structure hardens on impact with ultraviolet light.

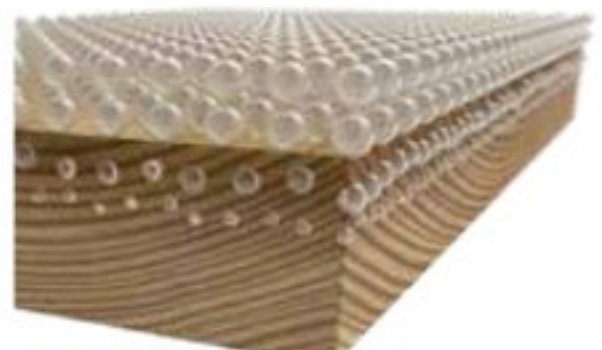

Lacquered floors



Lacquered floors

Multi-layered coating with a UV-hardened lacquer system protects the floor by forming a surface safeguarding it against abrasion, dirt and micro-scratches.



Matt lacquer

Emphasises the natural character of the wood floor and the depth of its design.



Semi-matt lacquer

Intensifies the impression of cosiness and warmth.



High gloss lacquer

An excellent solution for impressive elegant interiors.

Barlinek Floors finishing

7 000 revolutions*
The most resistant lacquer on the market

The Best in Test!
Barlinek flooring is victorious in an independent quality test of wooden floors conducted by the Technical Research Institute of Sweden. Our floor turned out to be more abrasion- and stain-resistant than floors from the other leading European producers!

Super-resistant Professional Lacquer
Super-resistant Professional Lacquer works excellently even in heavily used rooms. Winner of a Swedish abrasion resistance test. The results of the test also confirm that this is the lacquer most resistant to food stains, including coffee and red wine.



Bevelling

Bevelling involves slightly trimming a small part of the flooring's edge to highlight the individual boards to make the room look bigger.



Brushing

Brushing is a modern method of stressing the natural beauty of the wood graining and bringing out its structure. The texture of brushed wood is discernible to the touch.



Staining

Flooring is coloured by coating the surface with lacquer, oil or refined stain with a protective layer of lacquer.

Assembly



Standard installation kit

Installation kit includes the tools necessary to install multilayer flooring.

The set includes:

- metal holder
- wooden tapping block

ZEM001001



Professional grade profiled tapping block

Used when assembling layered wood floors with every kind of frontal and lateral lock.

- made from highly resistant plastic material.
- effectively absorbs the impact of a hammer

ZEM003002

Floating Method Underlays Fix Mat



FixMat SOUND 2,1SD

Durable polyurethane-mineral mat, thickness: 2,15 mm, integrated with vapour-barrier foil:

- Perfect for underfloor heating and cooling systems
- Ecological – up to 92% made from natural ingredients
- Makes the floor perfectly silent,
- Hard and durable – protects the locks against the damage
- Flame-retardant class BflS1
- A self-adhesive tape is integrated to help in joining the mat

Packaging: 7,5 m² - POD007001



Extreme 1.5

Professional, ecological underlay, thickness: 1,5 mm:

- Protects the board joints (heavy load resistance)
- Mutes the floor
- Perfect for underfloor heating (does not apply to Hybrid - WSPC floors)
- Is also suitable for Hybrid (WSPC) and SPC floors laid in a floating system

Packaging: 10 m² - POD007002



Cork mat

- (thickness: 2 mm) - made of natural cork, durable and flexible:
- Good sound insulation
- Resistant to heavy loads (high density)
- Easy and quick to install

Packaging: 10 m² - POD002001

Underfloor board EKO

(different thickness

– 3 mm; 4 mm; 5,5 mm; 7 mm)

– made of natural wood fibre:

- Perfect thermal insulator (not suitable for underfloor heating)
- Will help with undulations of the subfloor up to ca. 3 mm
- (depending on the thickness)
- Good sound insulation
- Resistant to loads

Packaging: 9,32 m².
grey tile 3,0 mm: POD001006

Packaging: 6,99 m².
grey tile 4,0 mm: POD001003
grey tile 5,5 mm: POD001001
grey tile 7,0 mm: POD001002



Adhesive Method



Adhesive based on hybrid polymer Barkiet 1K 950

Professional one-component adhesive, based on silane-modified polymer. Flexible, strong adhesive, wide range of applications, water free, EC1Plus low emission.

Recommended to all types of wood floors (including factory finished engineered wood floors). Suitable for underfloor heating. Solvent-free.

Packaging: 15 kg - KLJ001006



Barlinek 1K STP Primer

Single component polyurethane primer for strengthening cement, anhydrite and concrete floors. Applied before gluing down the Barlinek board using Barlinek 1K STP adhesive. Solvent-free.

Packaging: 5L - KLJ001007

Barlinek floors installation




Advantages of the floating system:

- you can assemble it yourself, i.e. simple
- cheap and quick assembly
- you can lay it on top of old flooring
- and unrestored floors
- the floor is ready for use
- immediately after installation
- damaged boards can be replaced easily
- possible to lay over underfloor heating

Advantages of the adhesive system:

- very good acoustic insulation
- no knocking or squeaking sounds
- it can be laid over large surfaces without
- the need to use expansion gaps
- assembly system recommended
- for underfloor heating



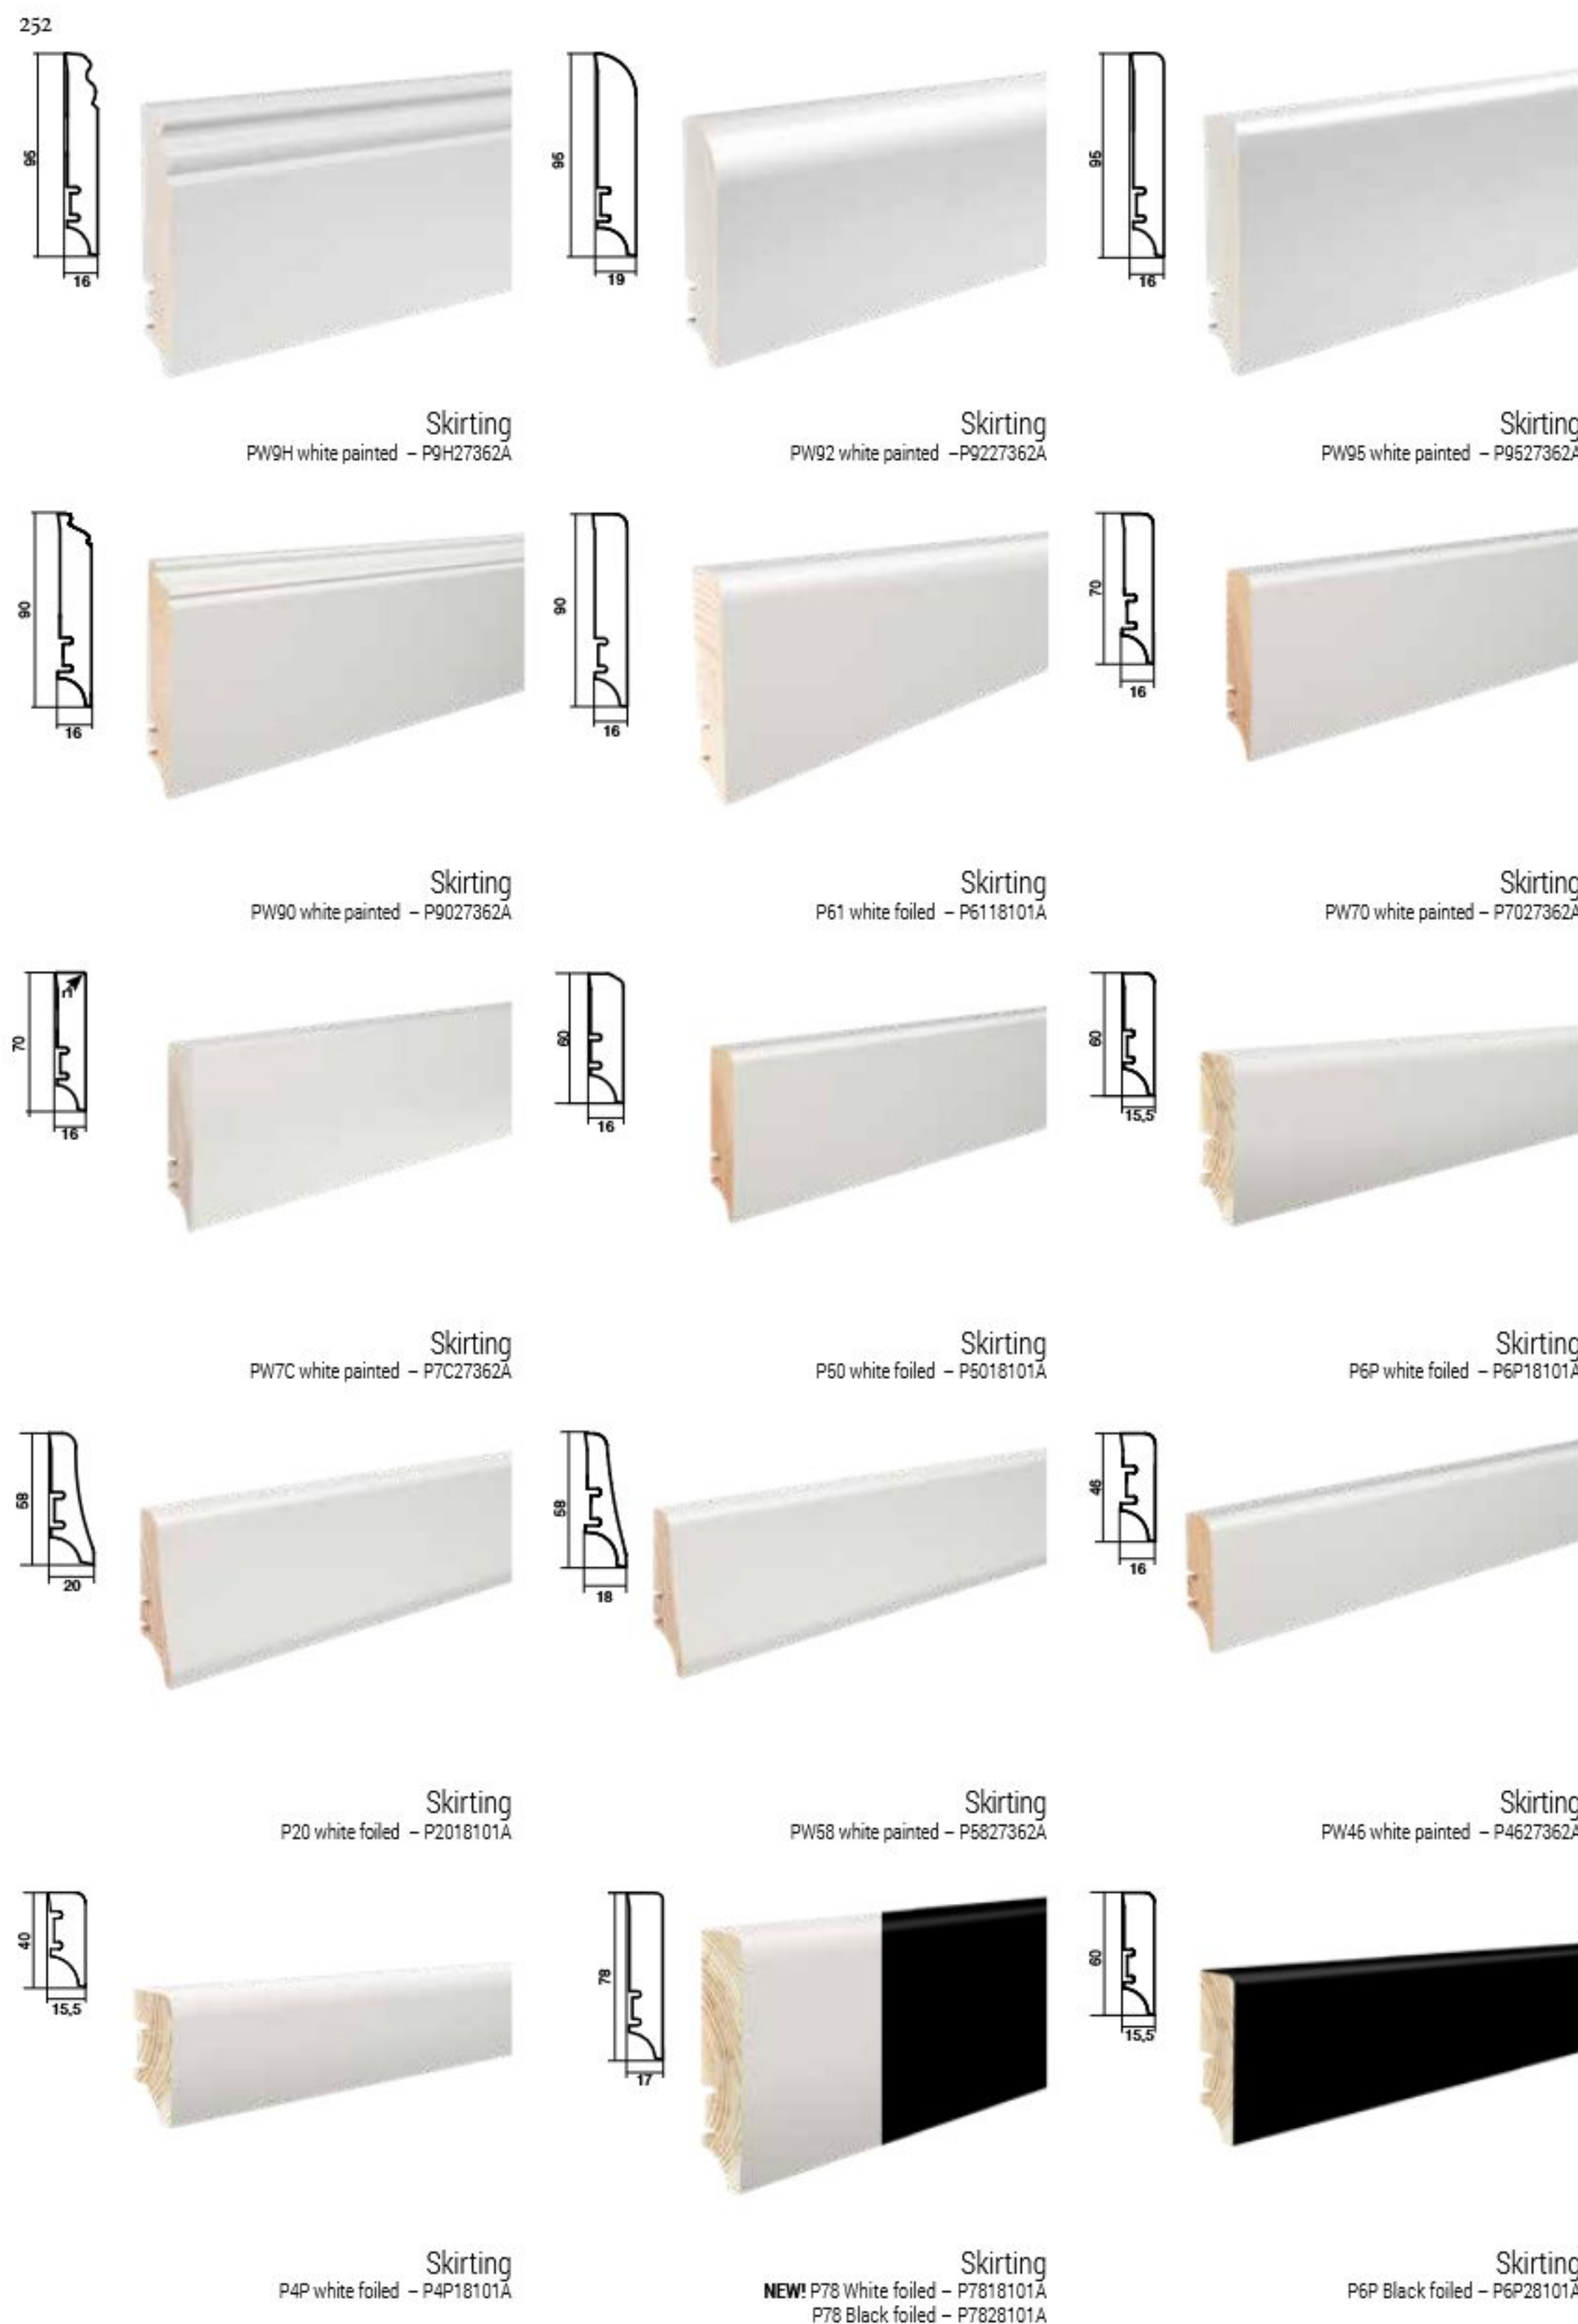


Skirting boards Elite

Elite series

is a prestigious collection of natural wooden skirting, white and black painted and foiled. The skirting composes beautifully with any type of flooring. White skirting is recommended for any floor.

may be painted





Skirting
Oak lacquer P61 – P6101011A



Skirting
Oak lacquer P78 – P7801011A



Skirting
Oak lacquer P30 – P3001011A




Skirting
Oak lacquer P6P – P6P01011A



Skirting
Oak lacquer P50 – P5001011A



Skirting
Oak lacquer P20 – P2001011A



Skirting
Oak lacquer P70 – P7001011A
Oak lacquer P71 – P7101011B



Skirting
Oak lacquer P10 – P1001011A



Skirting
Oak lacquer P4P – P4P01011A

White - ELITE collection Black - ELITE collection	Oak Gentle P50: P5001312A, P61: P6101312A, P6P: P6P01312A	Oak Tender P50: P5001352A, P6P: P6P01351A	Ash white lacquer P20: P2002031A, P50: P5002031A, P6P: P6P02031A	Oak Sense P50: P5001332A, P6P: P6P01331A	Oak Harmony P50: P5001342A, P61: P6101342A, P6P: P6P01342A
Oak white oil P20: P2001041A, P50: P5001041A	Oak white lacquer P10: P1001031A, P20: P2001031A, P50: P5001031A, P61: P6101031A, P6P: P6P01031A	Oak Touch P20: P2001242A, P50: P5001242A, P61: P6101242A, P6P: P6P01242A	Ash lacquer P10: P1002011A, P20: P2002011A, P50: P5002011A	Ash high gloss lacquer P50: P5002081A	Oak Rav P20: P2001121A
Oak lacquer P10: P1001011A, P20: P2001011A, P30: P3001011A, P50: P5001011A, P61: P6101011A, P70: P7001011A, P78: P7801011A, P4P: P4P01011A, P6P: P6P01011A	Oak Kalambo P6P: P6P01492A	Oak dark P20: P2001072A, P6P: P6P01072A, P78: P7801072A	Oak Excite P50: P5001302A, P6P: P6P01301A	Oak Bigar P6P: P6P01472A	Oak Mackay P6P: P6P01482A
Oak Honey P20: P2001222A	Iroco lacquer P20: P2012012A	Tai lacquer P20: P2008012A, P50: P5008012A	Oak Olive P50: P5001252A	Oak Terra P20: P2001212A, P50: P5001212A, P6P: P6P01212A	Oak Antio P20: P2001052A, P50: P5001051A
Ash Hazelnut P50: P5002382A	Oak Still P50: P5001422A, P6P: P6P01422A	Sapella lacquer P50: P5003011A	Ash Coffee P20: P2002062A	Oak Espresso P50: P5001022A	Wenge lacquer P20: P2009012A


Barlinek skirting board offer

Characteristics


- made of 100% wood, covered with veneer on the exterior
- available in many shapes and colours
- excellent dimensions stability
- durability thanks to the use of high quality wood
- durable merging of the veneer with the wooden skirting core
- factory-made protection of surface

Clip for attaching skirting boards


A metal mounting clip enabling quick, safe and easy mounting of any Barlinek skirting board.

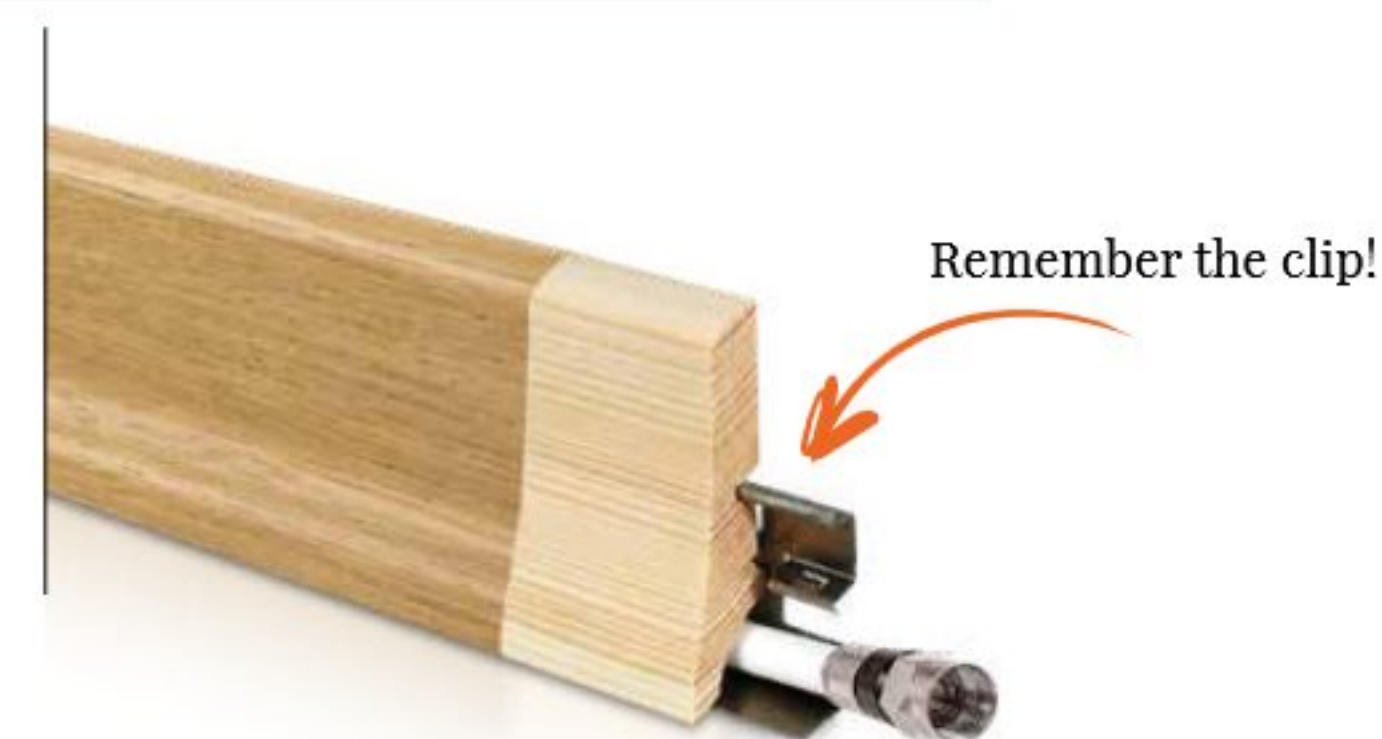


Clip 15 pcs: KLI001001
Clip 50 pcs: KLI001002





Finishing skirting board

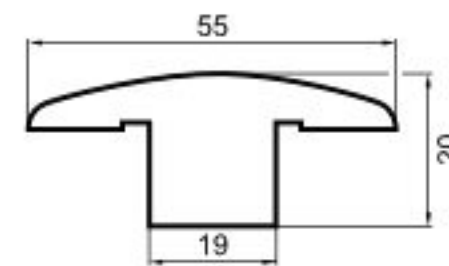


T-moulding

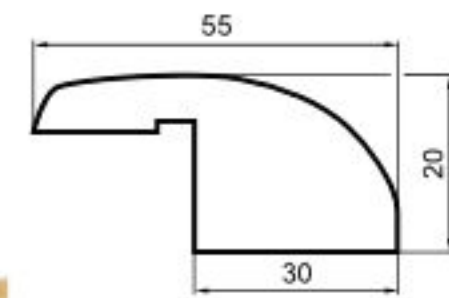

Threshold skirting board

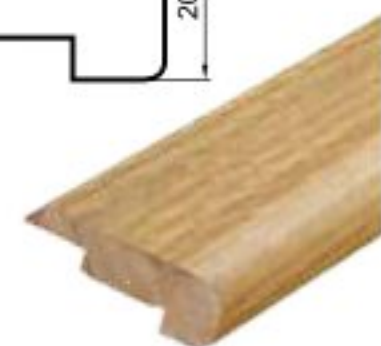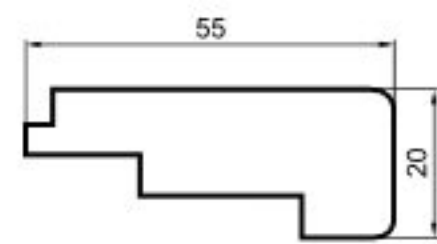

Low stairnose skirting board

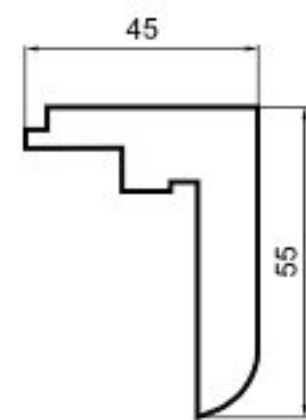

High stairnose skirting board

Special skirting boards

Barlinek offers special skirting concealing dilatation, as well as stairs and threshold skirting.



Oiled wood floors

Everyday
care



WASH CARE

Concentrate for everyday cleaning of naturally oiled wood floors. Refreshes the surface and prevents it getting dirty again. It has anti-slip properties

PRT004003

First and
recurring care



WAX CARE PLUS

Preparation in undiluted form. Agent for first and periodic care of wood floors finished with natural oil. Regular maintenance with Wax Care Plus protects, regenerates and refreshes the surface. Displays hydrophobic properties.

Yield approx: 100-110 m²/1L.

PRT004005

Thorough
cleaning



MAGIC CLEANER

Concentrate for very dirty and greasy wood floors coated with a natural oil, and for floors before renovation. Removes grease and dirt. The product does not contain bleach. Biodegradable.

PRT004004

lacquered floors



PROTEKTOR CONCENTRATE

Concentrate for everyday care of lacquered floors. Contains no wax which facilitates the subsequent renovation of the floor. Does not leave stains or streaks. Forms a resistant, antistatic, non-slip film on the floor surface. It can also be used on stone and ceramic floors.

PRT001002



PROTEKTOR SHINE

A care agent for periodic maintenance of lacquered wood floors. Forms a highly resistant coating that is renewed during subsequent uses. Old and scratched surface regains its lustre without the need for lacquering. Product ready for use in undiluted form.

Yield approx: 100 m²/1L.

PRT001001



PROTEKTOR COMPLETE

Concentrated intensive-action agent for degreasing and periodic deep cleaning of lacquered floors. Effectively removes stubborn dirt, stains and old layers of pastes and other maintenance agents, including old coatings of Protektor Shine. Ideal for use before lacquering floors, and also before refreshing with Protektor Shine.


PRT001003

Floor care and protection

Beautiful for years and years!

The worst enemies of a floor are water and sand. We keep it clean by sweeping, vacuuming and occasional wiping with damp (but not wet!) cloth. It is recommended to use cleaning articles suggested by the manufacturer for different types of flooring (natural oil, UV oil, lacquer). To protect from the damaging effect of sand and water, as well as salt in the winter, we should place mats near the entry of the house.

We should avoid walking on high heels on the floor. Furniture legs, pedestals and other forms of pressure on the floor should be secured with felt (but it must not be nailed). The floor under office chairs on wheels should be protected with mats. It is not recommended to mount flooring on surface with high humidity or exposed to direct contact with water.

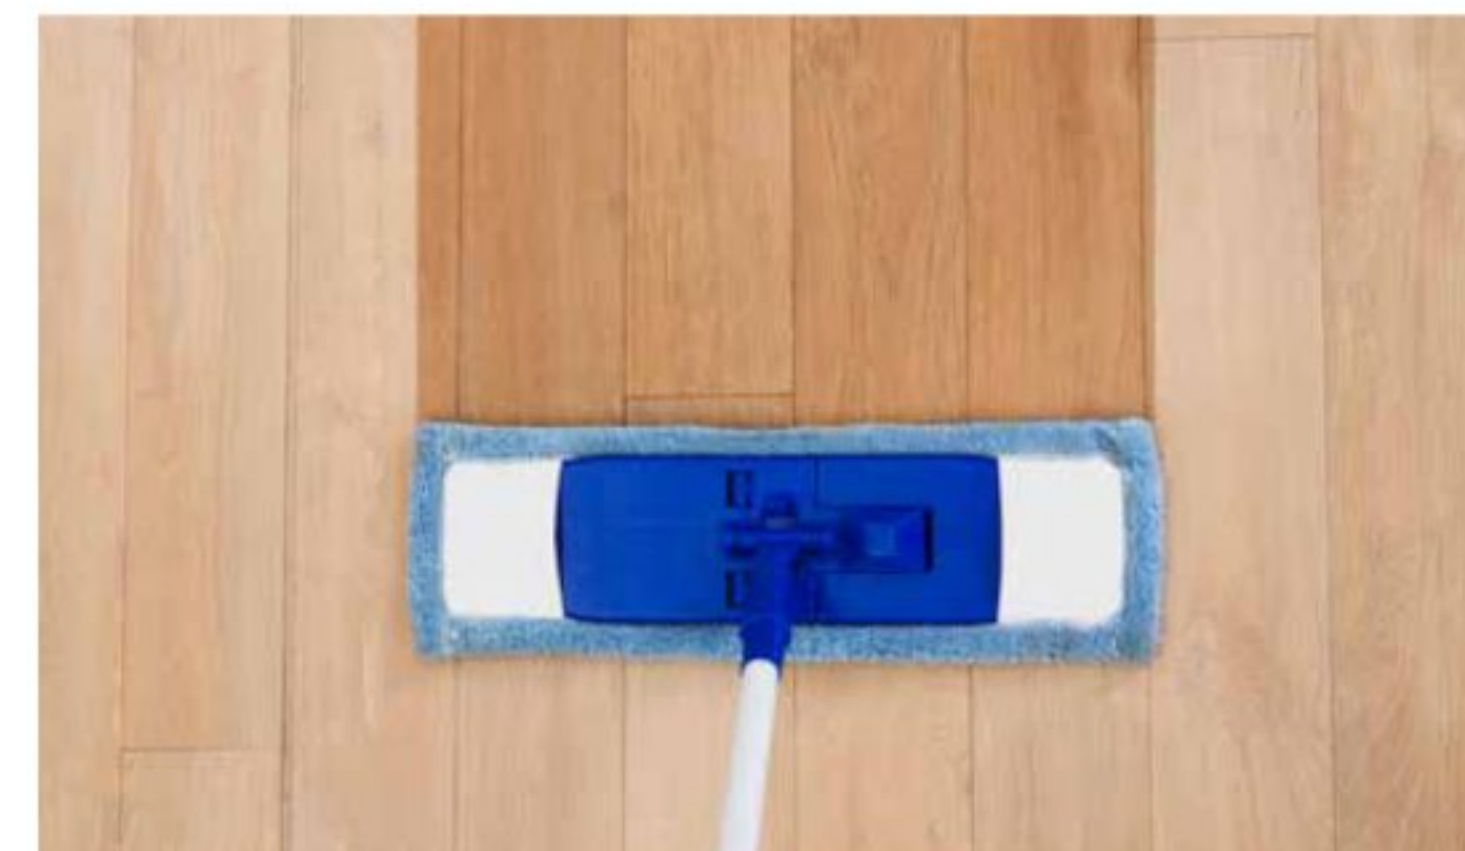



Barlinek S.A.
al. Solidarności 36,
25-323 Kielce, Poland
Phone: +48 41 333 11 00
Fax: +48 41 333 00 00
e-mail: info@barlinek.com.pl

barlinek.com



We plant one tree for each package of Barlinek floorboards.



Saving the Peregrine Falcon.



The "Bartek" Oak Tree in our care.