

CARMO CLICK
RIGID LVT



INDEX

3. Carmo Living	10. Carmo Living Collection Stone
4. Stylish Designs, Built to Last	11. Carmo Living Collection Walnut
5. Beautiful designs & Size	12. Carmo Living Collection Oak
6. The Construction / Specification	13. Carmo Living Collection Wood
8. Installation Method	14. Carmo Living Collection for Projects
9. Angle push-down click Technology	15. Maintenance & Cleaning Method

CARMO Living –

Where Innovation Meets Timeless Design
Carmo Living draws inspiration from the beauty of natural materials to bring a sense of refined sophistication to your interiors. Featuring rich wood textures and contemporary grey cement finishes, each element is thoughtfully curated to elevate your space with understated elegance.

Expertly designed to harmonize with a wide range of interior styles, the collection blends technical precision with the warmth and comfort of home.
We invite you to craft beautiful, welcoming environments that embody both style and serenity.

Light Gray Oak



Stylish Designs, Built to Last

The Carmo Living Collection offers a click modular vinyl solution that brings both elegance and resilience to your space. Engineered for modern living, it’s ideal for private residences and multifamily housing, combining style with life-proof durability. Each design is thoughtfully crafted to add depth, warmth, and personality to your home..



18 beautiful designs & more

The full spectrum of designs—from concrete to wood effects—brings a timeless, natural look to interiors. Each décor is designed to complement the others, allowing you to mix and match freely to create flexible, modular spaces tailored to your style..


Matter finish

A sleek matte finish is visible from every angle, enhanced by a PU surface coating that offers excellent resistance to scratches and stain



2 formats

Concrete or Marble : 30.00 x 60.00 cm
Wood : 18.10 x 122.00 cm

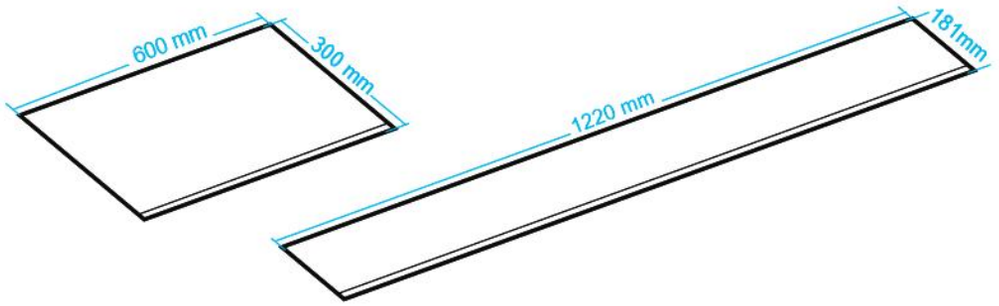



Walnut

LET US
HELP YOU
ACHIEVE
YOUR GOALS

The Construction



1. UV Coating
2. Wear-layer
3. Color Film Layer
4. Core
5. Click System
6. IXPE

Angle push-down click Technology Specification


PRODUCT SPECIFICATION	NORM	RESIDENTIAL	COMMERCIAL
Class of use	EN ISO 10874	CLASS 31	Class 33
Total thickness	EN ISO 24346	5.0 mm	5.2 mm
Wear layer thickness	EN ISO 24340	0.30 mm	0.55 mm
Total weight	EN ISO 23997	8350 g/m²	8400 g/m²
Binder content	EN ISO 10582	Type 1	Type 1
CE Marking	EN 14041	DoP-2025	DoP-2025
Surface treatment		Matte	Matte
Bevelled edges		Micro bevel	Micro bevel
Installation method		Angle push-down click Technology	Angle push-down click Technology
Plank Dimensions		Plank 1220 x 181 mm - 11 planks=2.43 m²/box	Plank 1220 x 181 mm - 11 planks=2.43 m²/box
Tile Dimensions		Tile 600 x 300 mm - 13 tiles=2.34 m²/box	Tile 600 x 300 mm - 13 tiles=2.34 m²/box


TECHNICAL PARAMETERS	NORM	VALUE
Dimensional stability	EN ISO 23999	≤ 0.15 %
Curl resultant to heat	EN ISO 23999	≤ |1| mm
Reaction to fire	EN 13501-1	Bfl-s1
Residual indentation	EN ISO 24343-1	≤ 0.10 mm
Thermal resistance	EN ISO 10456	0.05 m²k/w
Impact sound reduction	EN ISO 717-2	ΔLw 17 dB
Chemical resistance	EN ISO 26987	Good resistance
Furniture leg	EN ISO 16581	No damage
Slip Resistance	EN ISO 13893	Class DS
Light fastness	EN ISO 105-B02	≥ 6
Peeling Resistance	EN ISO 24345	≥ 50N/50mm
Technical Performance		
VOC emissions	EN 16516	Platinum
Substances of Very High Concern	EN 717-1	SVHC free


PHTHALATE FREE | FLOOR SCORE | 100% STABILITY | NO EXPANSION | NO CONTRACTION



Installation Method

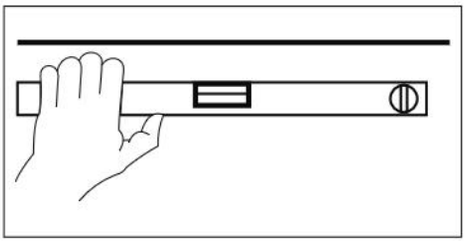

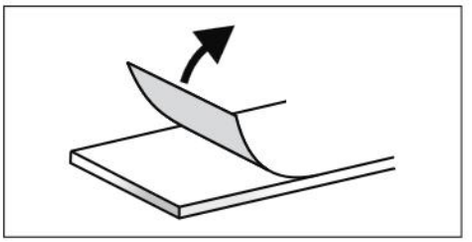

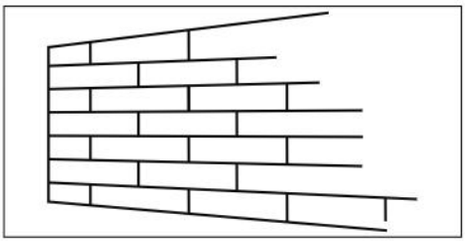

Before Installation:

– Leave planks in the installation area 24 to 48 hours to acclimate correctly and prevent shrinking.
– Make sure the installation area remains room temperature.
– Surface must be smooth and clean from all dust or debris for adhesive to stick properly.
– Keep product and installation surface dry.

After Installation:


– Maintain natural room temperature for the product.
– Do not use acetone or thinner on surface to clean.
– Clean with a damp cloth. No harsh chemicals.

Renovation - proof:

– Install directly over ceramic tiles with joints until 4mm x 2mm
– Suitable for underfloor heating & cooling.

Install and walk:

– No glue and no drying time. Rooms with an uninterrupted area until 15x10 m may benefit from an installation without expansion profile.

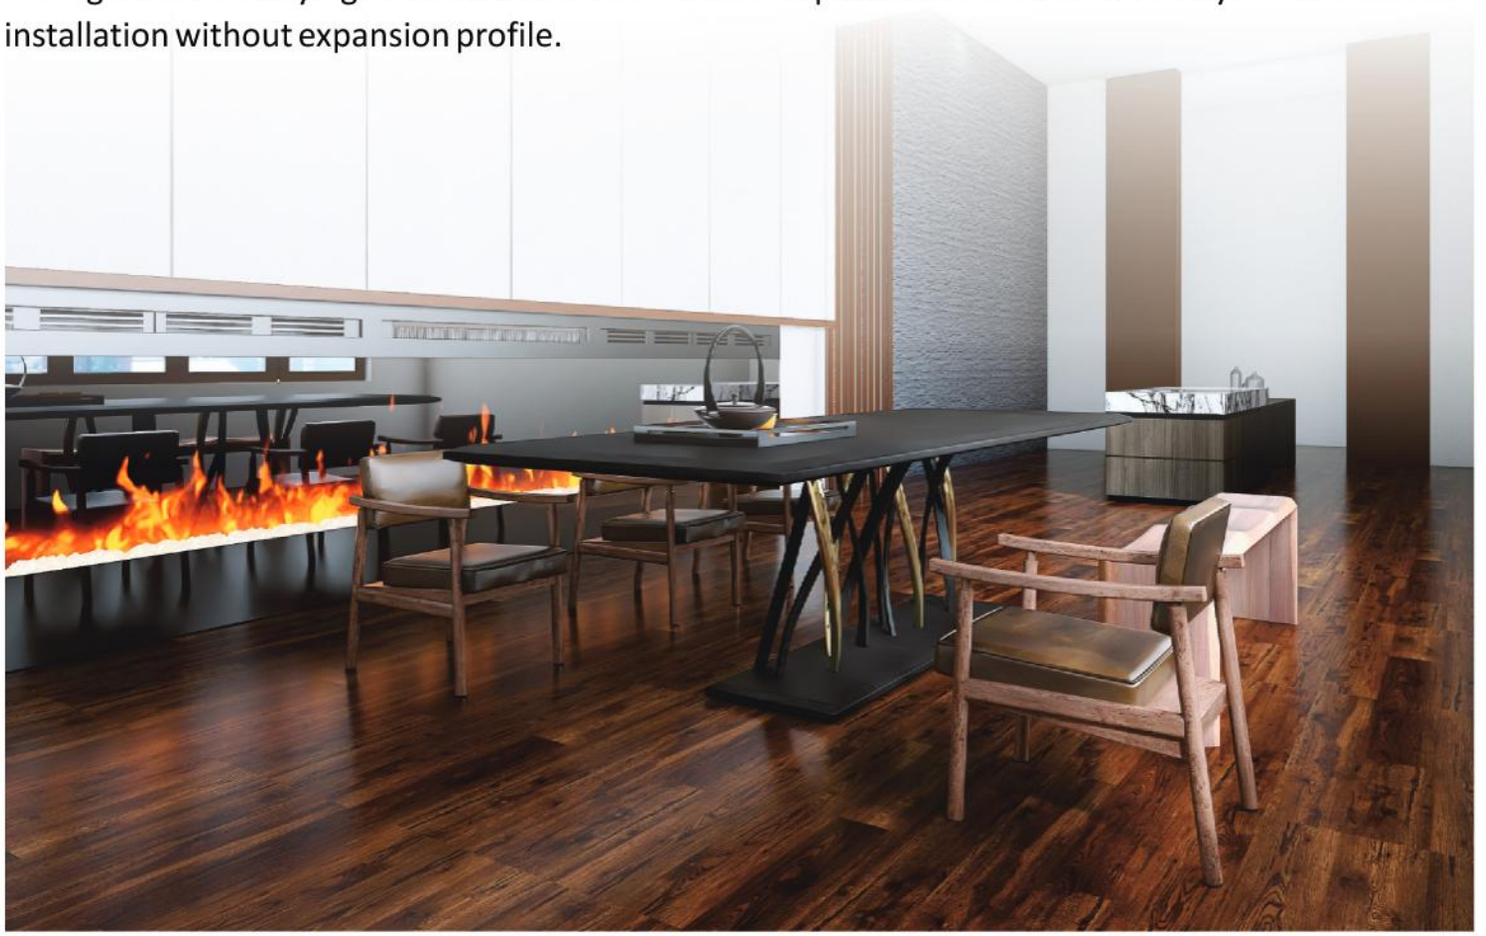


Angle push-down click Technology


Click it quick and easy with
Angle push-down click Technology:


- Easier to install than a laminate and ceramic flooring.
- 35% quicker to install then angle/angle click.
- Angling and push Down locking combination allowing to easily position the long side of the product with an angling motion and tap into place the sort side.




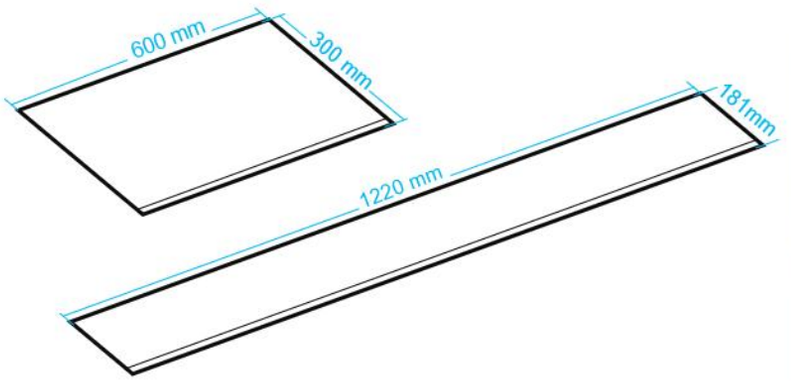


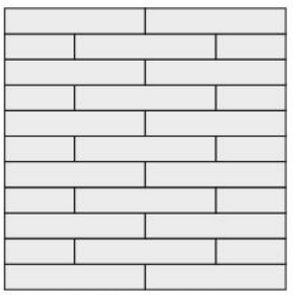




Offset / Brick Pattern

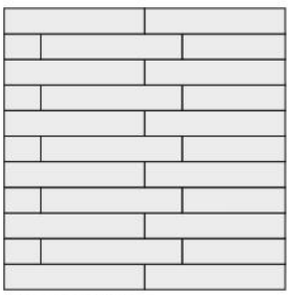

Random Drop



45* Diagonal



90* Random Drop



Weave 1or 2 color



Weave

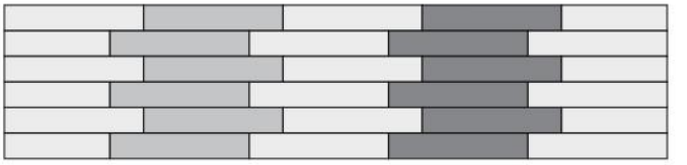
Stagger 3 color


45* Subway Style


Brick Pattern / Offset


Stagger 2 color


Grid

Carmo Living Collection



Available in Stock

30.00 x 60.00 cm



CR 30 : 31124
CR 55 : 51124

Alpine Stone




CR 30 : 31125
CR 55 : 51125

Refined Stone



CR 30 : 31128
CR 55 : 51128

Lime Stone

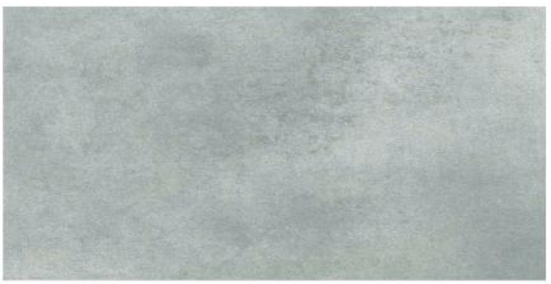

CR 30 : 31120
CR 55 : 51120

Cement



Available in Stock

18.10 x 122.00 cm



CR 30 : 31116 **CR 55 :** 51116 Natural Oak



CR 30 : 31117 **CR 55 :** 51117 Brown Walnut



CR 30 : 31118 **CR 55 :** 51118 Warm Oak

Available in Stock

18.10 x 122.00 cm



CR 30 : 31121 **CR 55 :** 51121 Smoke white



CR 30 : 31122 **CR 55 :** 51122 Snow Oak



CR 30 : 31123 **CR 55 :** 51123 Crack / Light Oak



CR 30 : 31126 **CR 55 :** 51126 Light Gray Oak



CR 30 : 31127 **CR 55 :** 51127 Dark Grey Oak



CR 30 : 31119 **CR 55 :** 51119 Classic Walnut



Available in Stock

18.10 x 122.00 cm



CR 30 : 31111 **CR 55 :** 51111 Beige Oak



CR 30 : 31112 **CR 55 :** 51112 Nordic Oak



CR 30 : 31113 **CR 55 :** 51113 Light Brown Walnut



CR 30 : 31114 **CR 55 :** 51114 Natural Beige



CR 30 : 31115 **CR 55 :** 51115 Silk Wood Oak





SKYDANCE
PRODUCTIONS


Maintenance & Cleaning Method







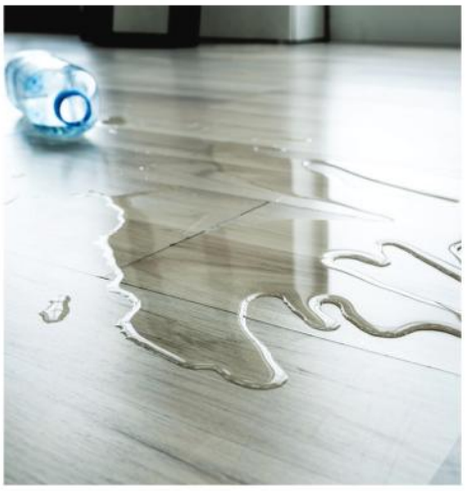

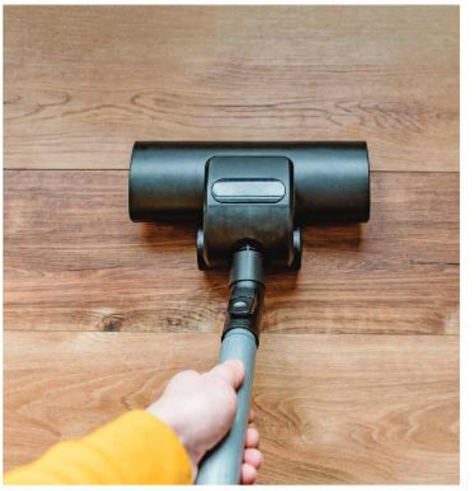

Rigid LVT flooring is relatively low-maintenance, but regular cleaning and preventative measures can help maintain its appearance and longevity.

Here's a more detailed breakdown: Daily/Regular Maintenance:

Sweep or Vacuum: To remove loose dirt and debris, use a soft broom, a vacuum cleaner (preferably without a beater bar to prevent scratching), or a dust mop. This prevents abrasive particles from dulling the finish over time.

Damp Mop: For a deeper clean, use a microfiber mop with a mild, pH-neutral cleaner diluted in warm water. Avoid using harsh chemicals, wax-based products, or abrasive cleaners, as these can damage the protective layer of the LVT.

Wipe Up Spills Immediately: Promptly address any spills to prevent them from soaking into the flooring and causing stains. A clean cloth or paper towel is usually sufficient for this.





Designed in Canada