




LAMINATE FLOORING CHEVRON DESIGNS



EXCLUSIVE RANGE OF SHADES AND BEAUTIFUL FINISHES

LAMINATE FLOOR

CHEVRON DESIGNS

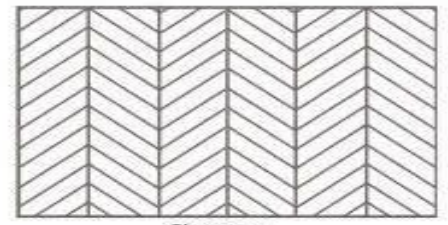

Chevron



CH 01



CH 02



CH 03




CH 04



LAMINATE FLOOR


CHEVRON DESIGNS

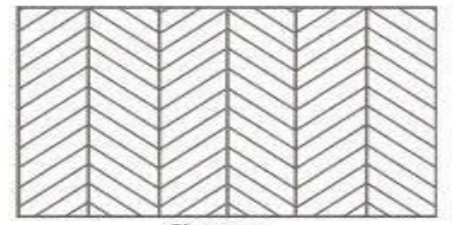

CH 05



CH 06

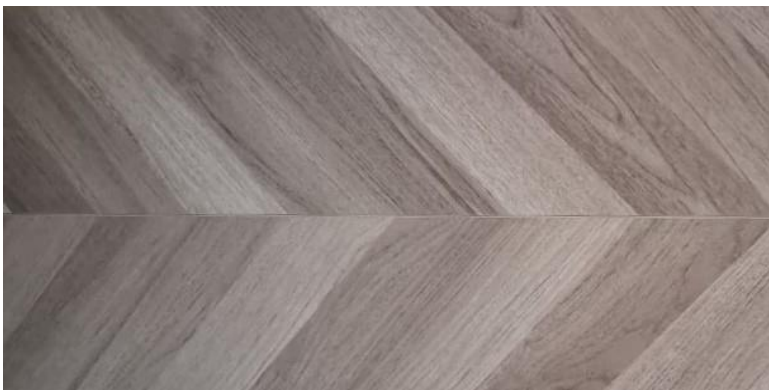

CH 07







PRODUCT SPECIFICATION

8mm-AC4-class 23/32-4V-Natural / Truwood Structure-Classic Plank

Technical Specification	Norm	Values
Structure Surface		Natural/TruWood
Structural Panel		HDF 850 kg/m ³
Thickness		8mm
Class of Use	EN 13329	23 / 32
Wear Resistance	EN 13329	≥ 4000
Wear Class	EN 13329	AC4
Thickness Swelling	EN 13329	< 12%
Impact Class	EN 13329	IC2
Staining Class	EN 438-2, 15	6 (Group 1 & 2)
Light Fastness	EN 438-2, 16	>6
Burning Cigarette	EN 438-2, 18	4
Castor Chairs	EN 425	>2N
Slip Resistance	EN 13893	Class DS
Emission of Formaldehyde	EN 717-2	E1
Reaction to Fire	EN 13501-1	Cfl s1
Thermal Resistance	ISO 8302	0.07m ² k/w
Underfloor Heating		suitable



COMMERCIAL - VERY HEAVY



INDUSTRIAL - HEAVY



SLIP
RESISTANCE



FIRE
RESISTANCE



COLOR
FASTNESS



CHEMICAL
RESISTANCE



STAINING
RESISTANCE



WEAR BY
CASTOR CHAIRS



RESIDUAL
INDENTATION



UNDERFLOOR
HEATING

