



FF 04



FF 06



FF 09



FF 12



FF 13



FF 14



FF 17



FF 18



FF 22



FF 28



FF 29



FF 30



FF 31



FF 58



FF 68




FF 78



FF 88


COLOR FIELD S E R I E S

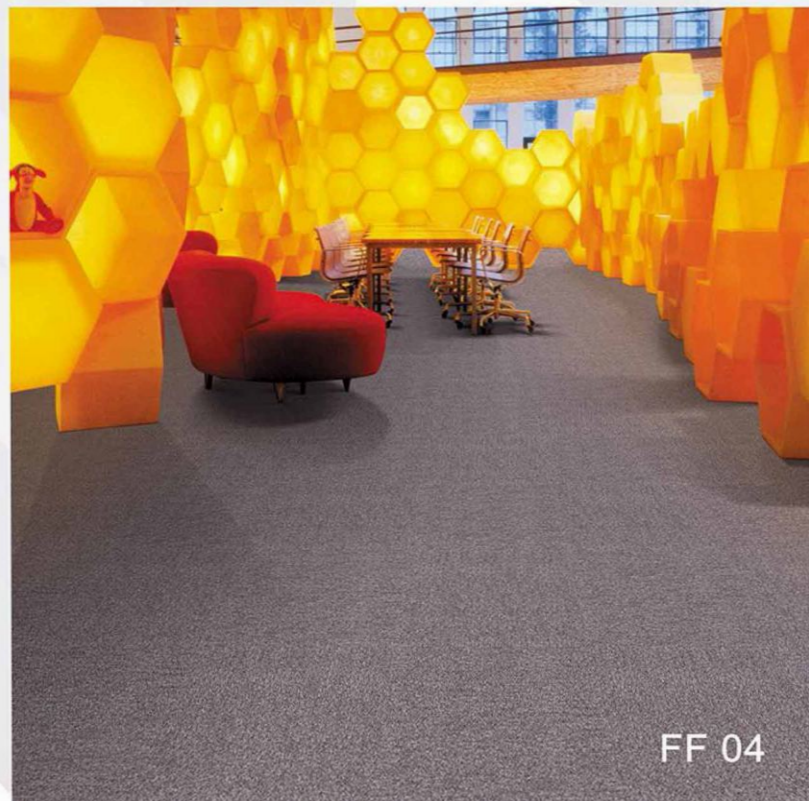


FF 04



COLOR FIELD S E R I E S

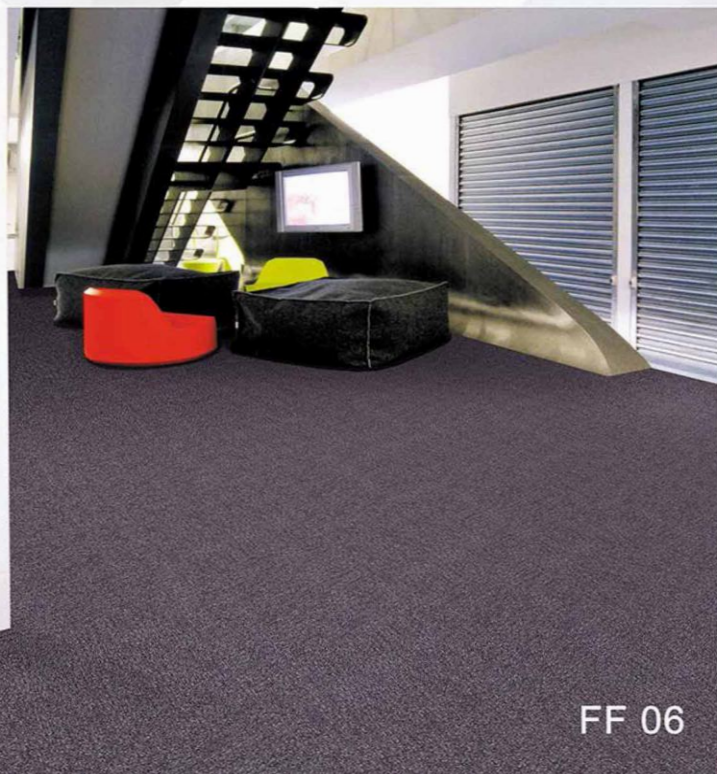

FF 06

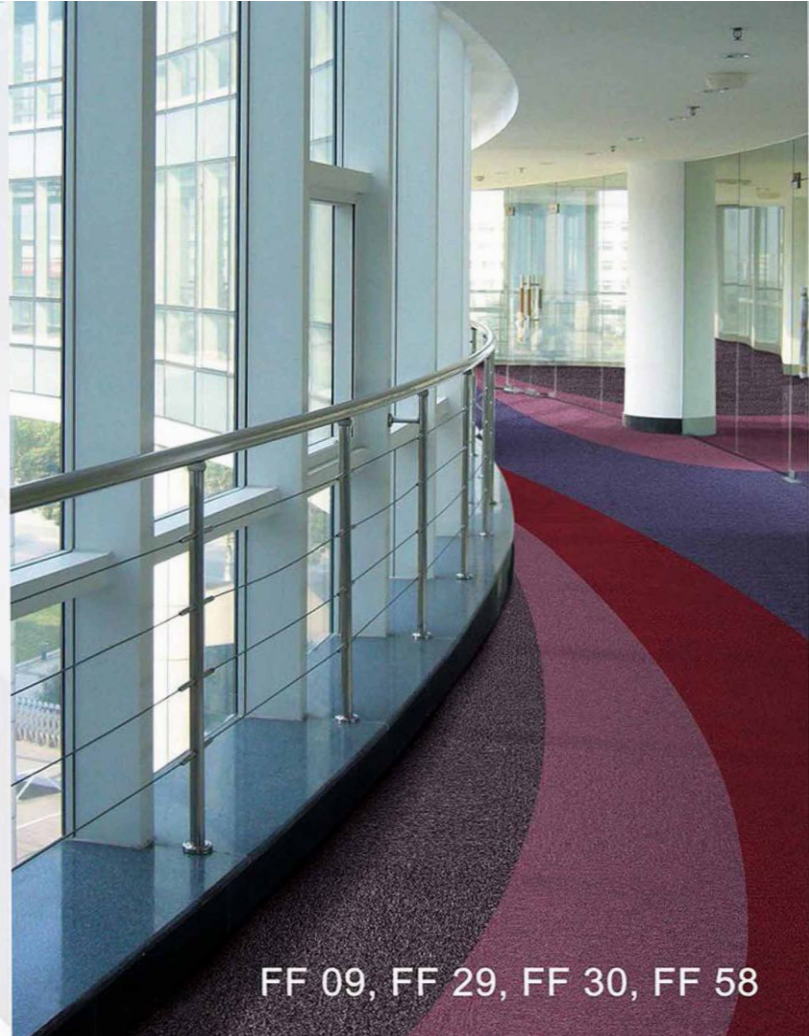

FF 09, FF 29, FF 30, FF 58



COLOR FIELD S E R I E S





COLOR FIELD S E R I E S



FF 14, FF 68, FF 78



FF 18



COLOR FIELD S E R I E S



FF 22, FF 28, FF 31



FF 22, FF 68, FF 78



COLOR FIELD S E R I E S






COLOR FIELD S E R I E S



FF 18, FF 88

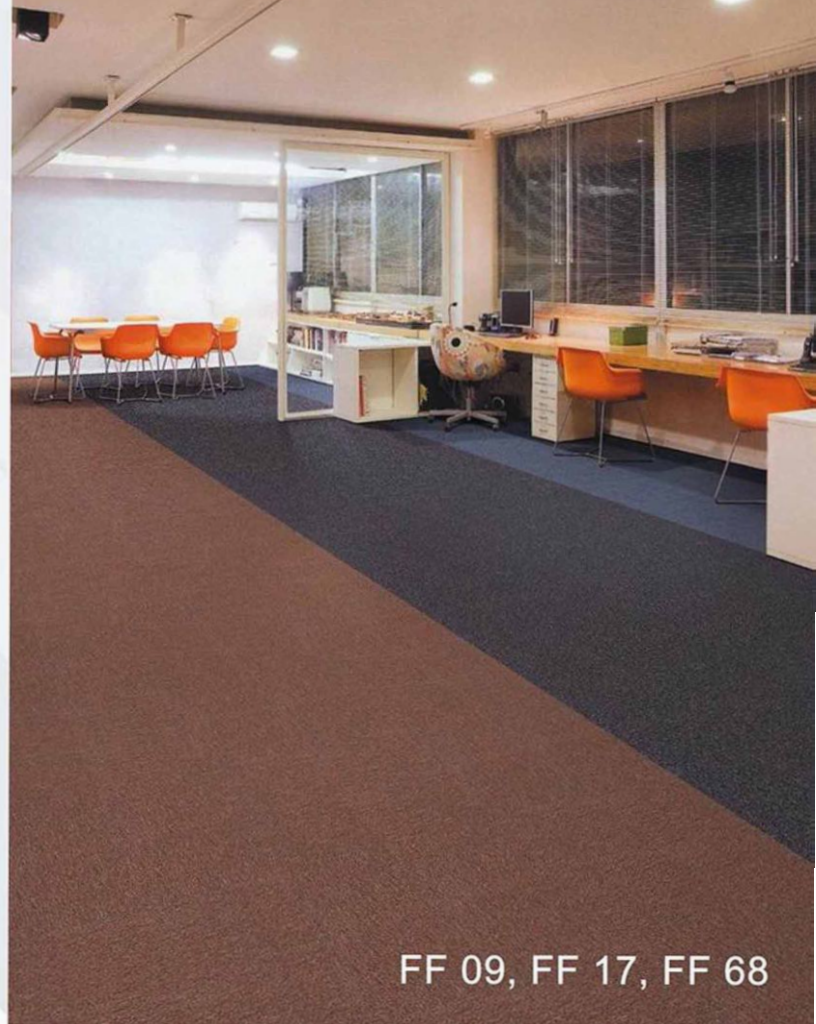

FF 09, FF 17, FF 68



COLOR FIELD S E R I E S

FF 06, FF 78

Flooring Reimagined

Construction	Level Loop
Material	100% Polypropylene
Pile Weight	18 oz
Pile Height	3 mm
Size	50cmx50cm



GLP1231



Ultraviolet resistance



Anti-Static



Reduced Toxicity



Mold Resistance



Environmental



Long life span



Dimensional stability



Anti-slip



Passed Impact Tests

Test Performance

Volatile Organic Compound (voc)	:Pass ASTM D7706-11
Semi Volatile Organic Compound (SVOC)	:Pass ASTM D7706-11
Formaldehyde Emission	:Pass NIOSH method 2016
Flammability	:Pass GB 8624-2006 Pass GB/T 14768-93
Smoke Density	:Pass ASTM-E-662 <=450 DMC Pass GB 8624-2006
Static Generation	:Pass AATCC-134 Pass GB/T 18044-2000
Color fastness to water	:Pass AATCC-16E Pass Grade 4/5 ISO 105-X12 Pass BS EN ISO105 E01:1996
Color fastness to light	:Pass AATCC-16E Pass Grade 5 ISO-B02:1994E Pass BS EN ISO105 B02:1999
Colorfastness to Crocking	:Pass BS EN ISO 105-X12:2002
Tensile strength test	:Pass ISO13934-1 Warp 3112.9



ISO 9001 : 2008



ISO 14001 : 2004



quarter turn