


Cracked Cement™

Commercial Carpet Tiles

The commercial tile has a distressed pattern with 'cracks' and is comfortable underfoot. It's available in 50x50cm tiles and an ideal choice for high traffic spaces such as corridors and reception areas.

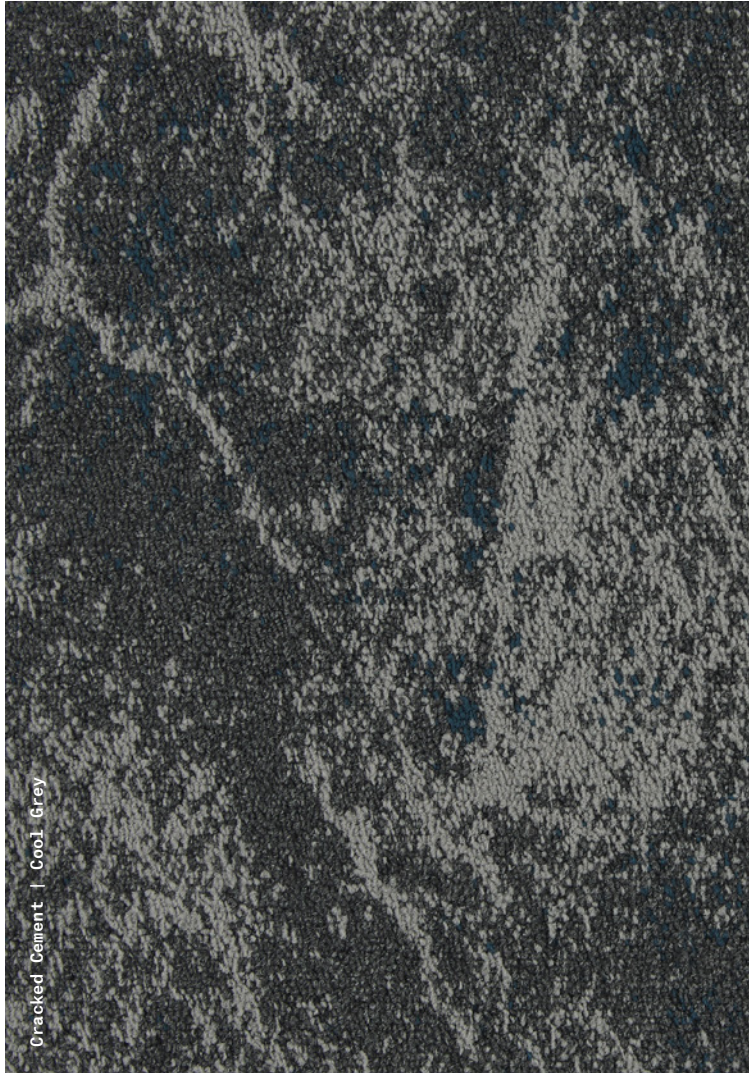

Cracked Cement | Cool Grey


Construction	Pattern Colour Placement
Fibre Type	Stainproof SDX (Solution Dyed Nylon)
Use Classification	Heavy Commercial
Pile Height	2mm (±0.5mm)
Total Thickness	6mm (±0.5mm)
Backing	NexBac
Standard Sizing Available	50 x 50cm*
Machine Gauge	1/10"
Stitches/10cm	50
Total Mass	±3900g/m2
Fire Index	Bfl - S1 (EN 13501) Class 1 (ASTM E648-08)
Colour Fastness To:	
I) Light	7 (ISO 105 - B02)
ii) Rubbing	(a) Wet 4 - 5 (ISO 105 - X12)
Rubbing	(b) Dry 4 - 5 (ISO 105 - X12)
iii) Water	4 - 5 (ISO 105 - E01)
Electrostatic Propensity	Less than 2.0kV (ISO 6356 & EN 1307)
Static Control	Permanent
Sound Absorption	aw 0.15
VOC Tested	Pass
Recycled Content	Backing - NexBac Eco (available on request only) Pile Yarn (certain colours only)

NOTE: Belgotex recommends carpet protector mats where castor wheels are used.


B.




Cool Grey



Char Green



Fossil



Jet Black



Spruce Blue



Winter Gray