




LINOLEUM

gerflor.com



Gerflor[®]
theflooringroup

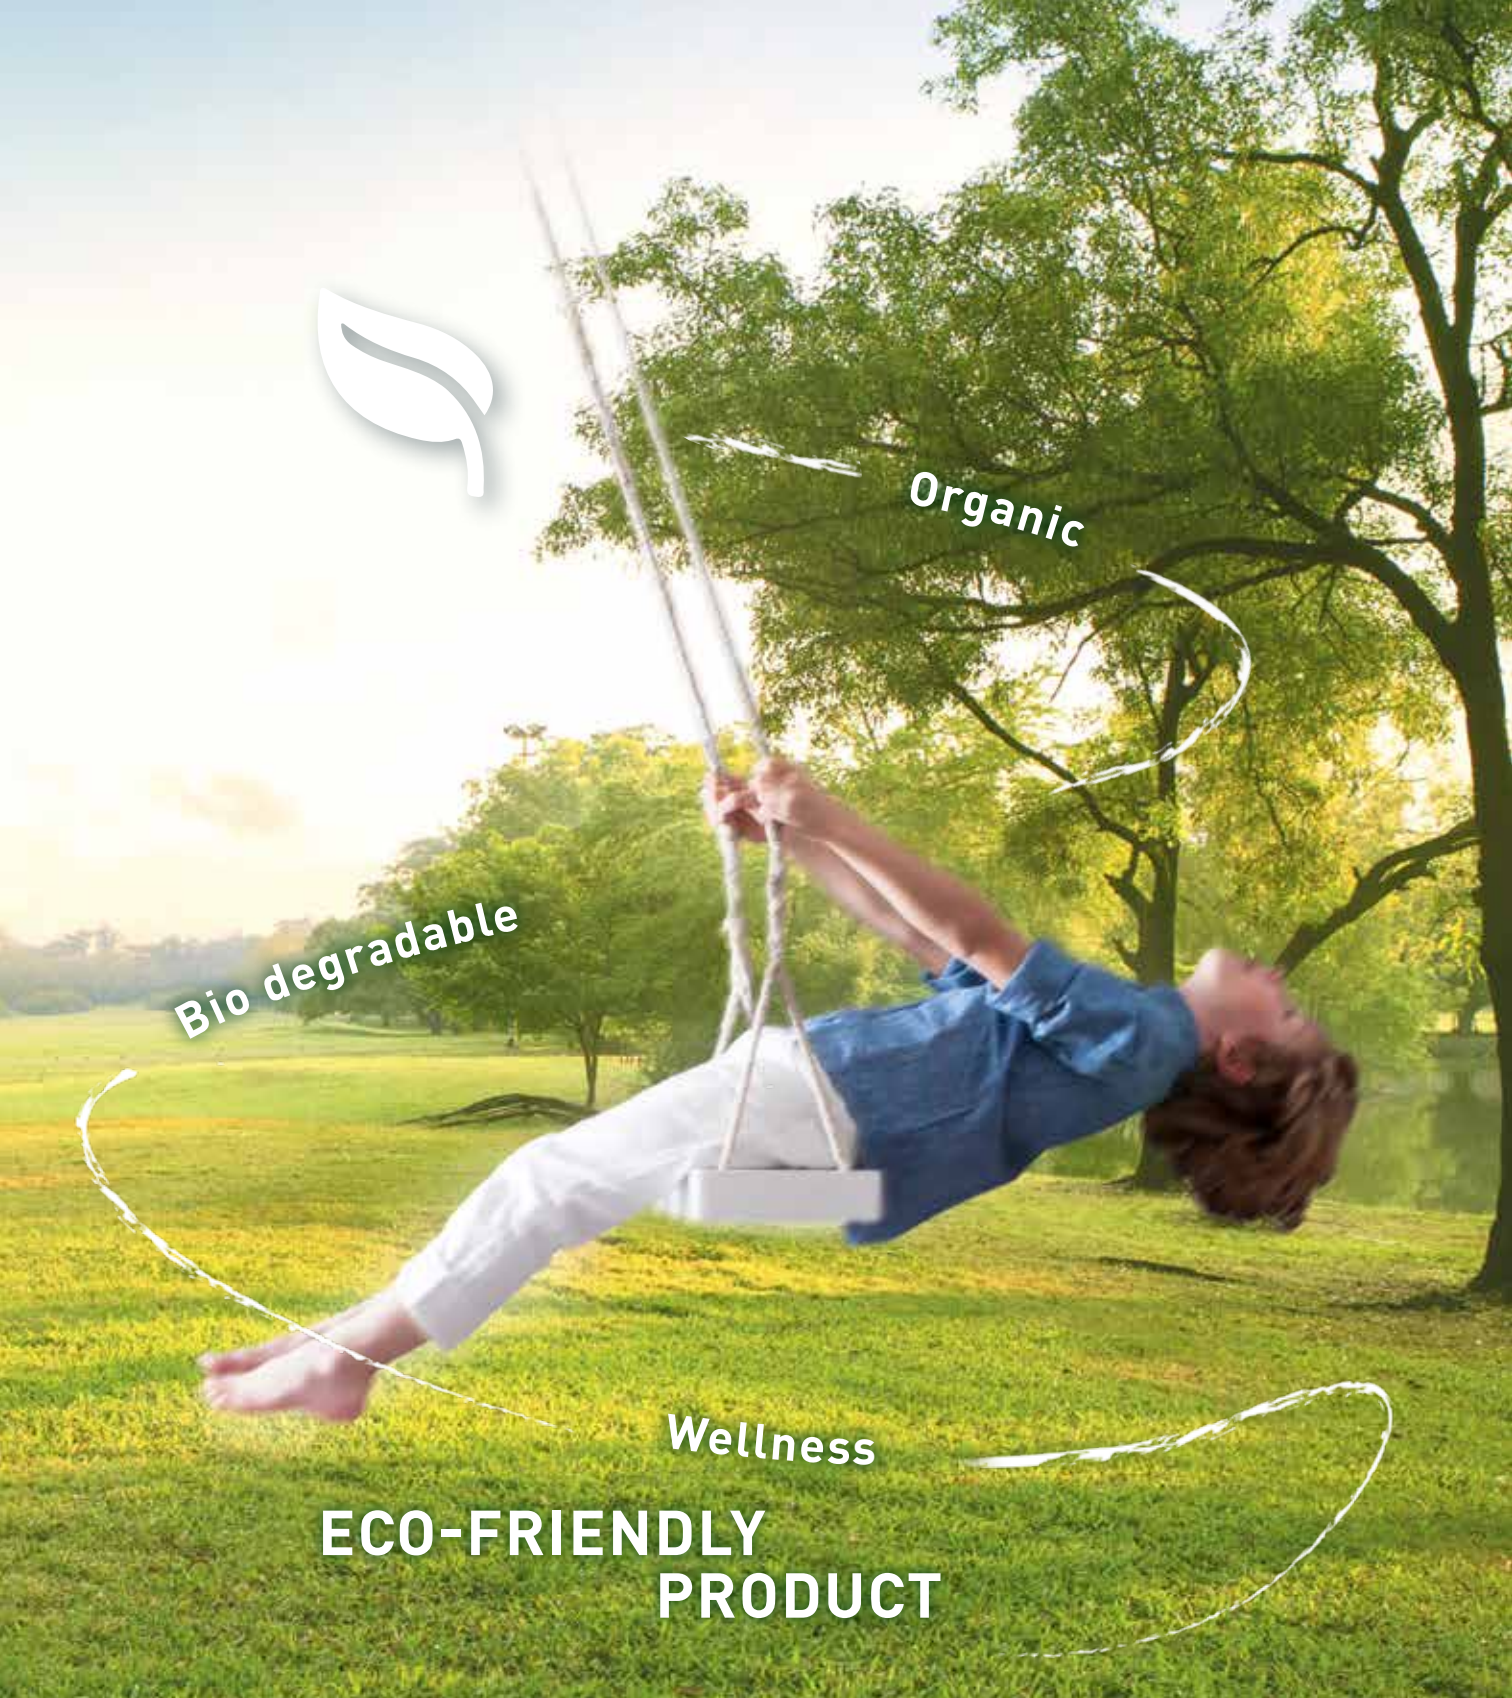

**ECO-FRIENDLY
PRODUCT**







LINOLEUM COMPACT



Highlighted colors only available in stock



NCS: S 2050-Y30R

0173 Melon Orange



NCS: S 2020-Y30R

0098 Desert Beige ●



NCS: S 1510-Y20R

0145 Banana White



NCS: S 2010-Y10R

0045 Sand Beige ●



NCS: S 3050-Y40R

0073 Spicy Orange



NCS: S 2040-Y10R

0076 Pale Yellow



NCS: S 2020-Y20R

0040 Light Sahara ●



NCS: S 3010-Y30R

0146 Beeswax Beige



NCS: S 2050-Y50R

0174 Physalis Orange



NCS: S 1050-Y20R

0072 Golden Yellow



NCS: S 2030-Y30R

0070 Rocky Brown ●▲



NCS: S 5010-Y70R

0003 Dark Brown



NCS: S 2075-Y60R

0117 - Mandarin Orange



NCS: S 1080-Y20R

0172 Papaya Orange



NCS: S 4030-Y30R






0140 Leather Brown



NCS: S 8010-Y30R

0108 Mokka Brown

MARMORETTE

 Prod. code: 121	 Prod. code: 121	 All colors	● Thickness 2.0mm Prod. code: 821	▲ Thickness 3.2mm Prod. code: 521	 Prod. code: 125	 All colors
---	---	---	--	--	---	---

Available in stock



NCS: S 4020-R90B

0023 Dusty Blue ●▲



NCS: S 4040-R80B

0049 Royal Blue ▲



NCS: S 2060-Y90R

0048 Cranberry Red



NCS: S 2050-Y60R

0019 Sunset Orange



NCS: S 5020-R90B

0022 Autumn Blue ▲



NCS: S 5040-R80B

0148 Ink Blue




NCS: S 4050-Y90R

0018 Lobster Red



NCS: S 3050-Y60R

0115 Rusty Orange



NCS: S 4030-R90B

0026 Sky Blue



NCS: S 7020-R80B

0149 Dark Blue



NCS: S 1580-Y80R

0118 Chili Red



NCS: S 3050-Y60R

0119 Terracotta




NCS: S 3040-Y90R

0008 Chestnut



NCS: S 2030-Y50R

0075 Light Aurora

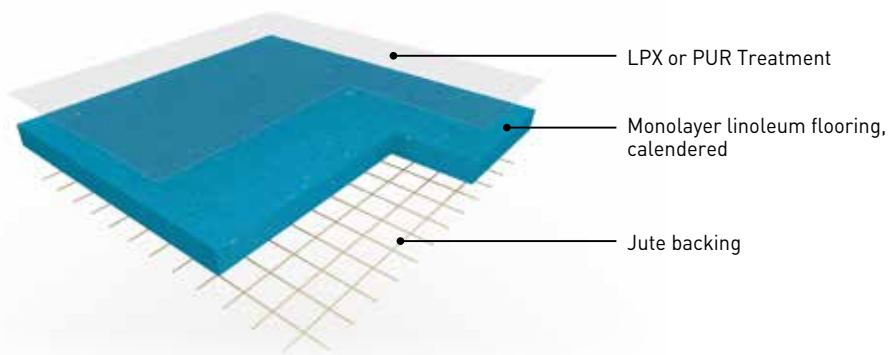

▶ **MARMORETTE** is a linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is 2400gr/sqm in 2.0mm, 2900gr/sqm in 2.5mm and 3800gr/sqm in 3.2mm. It features a marbled design and is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). LPX surface treatment ensures an excellent durability and an easy maintenance. PUR surface treatment is particularly well resistant against stains. The camouflage welding rod makes the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic and antibacterial. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.



▶ **LINO ART** is a linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is 2900gr/sqm. It features a striated design (**LINO ART NATURE**), scattered metallic design (**LINO ART METALLIC**), scattered colour chips design (**LINO ART STAR**) or concrete design (**LINO ART URBAN**) and is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). LPX surface treatment ensures an excellent durability and an easy maintenance. The uni welding rod makes the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic and antibacterial. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.



▶ **COLORETTE** is a linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is 2900gr/sqm. It features a speckled design and is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). LPX surface treatment ensures an excellent durability and an easy maintenance. The uni welding rod makes the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic and antibacterial. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.



▶ **GRANETTE** is a linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is 2900gr/sqm. It features a granulated design and is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). PUR surface treatment ensures an excellent durability and an easy maintenance. The camouflage welding rod makes the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic and antibacterial. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.




▶ **UNI WALTON** is a linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is 2900gr/sqm in 2.5mm and 3800gr/sqm in 3.2mm. It features a uni design and is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). LPX surface treatment ensures an excellent durability and an easy maintenance. The uni welding rod makes the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic and antibacterial. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.



MARMORETTE LPX

MARMORETTE PUR


DESCRIPTION				
Type of flooring	EN ISO 24011 <small>(EN 548)</small>	-	Linoleum with LPX surface treatment	Linoleum with PUR surface treatment
Pattern	-	-	Marbled	Marbled
Total thickness	EN ISO 24346 <small>(EN 428)</small>	mm	2.0 / 2.5 / 3.2	2.5
Backing	-	-	Jute fabric	Jute fabric
Weight	EN ISO 23997 <small>(EN 430)</small>	g/sqm	2400 / 2900 / 3800	2900
Width of sheet	EN ISO 24341 <small>(EN 426)</small>	cm	200	200
Length of sheet	EN ISO 24341 <small>(EN 426)</small>	m	20-31	20-31
CLASSIFICATION				
Norm / Product specification	-	-	EN ISO 24011	EN ISO 24011
European classification	EN ISO 10874 <small>(EN 685)</small>	class	23 / 34 / 42 / 43 23 / 32 / 41 in 2.0mm	23 / 34 / 42 / 43
Fire rating	EN 13501-1	class	C _{fl} -s1*	C _{fl} -s1*
Slip resistance	ASR A1.5 / DIN 51130 – BGR 181	class	R9	R9
Dynamic friction coefficient	EN 13893	-	DS (>0.30)	DS (>0.30)
Impact sound insulation	EN ISO 10140	dB	3 dB / 5 dB / 6 dB	5 dB
PERFORMANCES				
Residual indentation	EN ISO 24343-1 <small>(EN 433)</small>	mm	≤ 0.15	≤ 0.15
Colour fastness	EN ISO 105 - B02	degree	≥ 6	≥ 6
Point contact resistance	VDE 0100	kOhm	> 200	> 200
Static electrical propensity	EN 1815	kV	app. 2.0	app. 2.0
Castor chair test (Type W)	ISO 4918	-	OK	OK
Thermal resistance	EN 12667	sqm,K/W	0.012 / 0.015 / 0.018	0.015
Thermal conductivity	EN ISO 10456 <small>(EN 12 524)</small>	W/(m.K)	0.17	0.17
Surface treatment	-	-	LPX	PUR
Chemical products resistance	EN ISO 26987 <small>(EN 423)</small>	-	Resistance to fat and mineral oil	
Antibacterial activity	JIS Z 2801	-		
CE MARKING				
	EN 14041 : 2004 AC : 2006	-		
		-		

* Glued according to certificate.

DOP numbers available from your local branch.



Depending on light exposure, the product colour can vary, due to linoleum natural oxidization process. This process is reversible. We recommend that the samples be exposed to sunlight for several hours prior to making a final color choice.

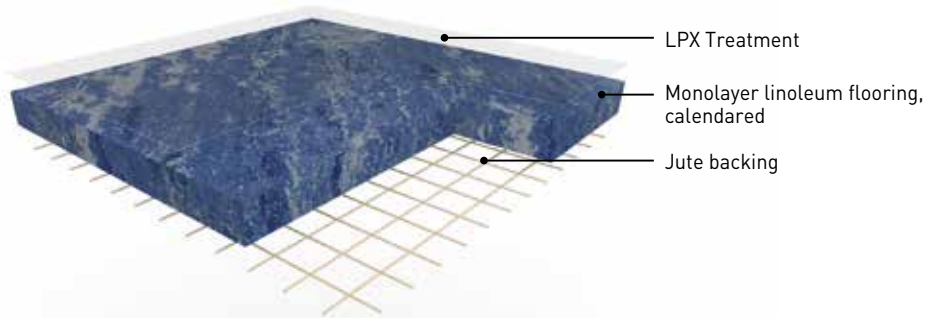

▶ **LINODUR LPX** is a linoleum compact floorcovering in sheet, 4mm width and 2m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is 4700gr/sqm. It features a moiré design and is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). Its LPX surface treatment ensures an excellent durability and an easy maintenance. The camouflage welding rod makes the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic, antibacterial and has been conceived to resist to the passage of heavy trolleys: dynamic load is 30kg/sqm. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.



▶ **LINODUR LCH LPX** is a linoleum compact dissipative floorcovering in sheet, 4mm width and 2m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is 4900gr/sqm. It features a moiré design and is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). Its LPX surface treatment ensures an excellent durability and an easy maintenance. The camouflage welding rod makes the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic, antibacterial and has been conceived to resist to the passage of heavy trolleys: dynamic load is 30kg/sqm. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.



▶ **MARMORETTE LCH LPX** is a linoleum compact dissipative floorcovering in sheet, 2m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is 3000gr/sqm in 2.5mm and 3900gr/sqm in 3.2mm. It features a marbled design and is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). Its LPX surface treatment ensures an excellent durability and an easy maintenance. The camouflage welding rod makes the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic and antibacterial. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.

Gerflor International

Tel: +33 (0)4 74 05 40 00

Fax: +33 (0)4 74 05 03 13

e-mail: gerflorcontract@gerflor.com

gerflor.com

ARCHITECTURE
DECORATION
SPORT
TECHNOSPECIFIC

Gerflor Don't forget our complementary ranges!



Handrails



Wall Coverings
& Protections



Entrance mats



Skirtings
& Profiles

Gerflor

Be connected!



www.gerflor.com

#Gerflor

GERFLOR, **ACTIONS SPEAK LOUDER THAN WORDS**



COMPOSITION

98% organic

80% renewable (linseed oil, wood powder, cork, resins, jute)

100% REACH compliant



**RECYCLED
CONTENT**

Up to 40% recycled content



LCA

Eco designed according to a product specific life cycle analysis

Manufactured in a ISO 14001 certified site



WELLNESS

Antibacterial activity

Walking comfort



Gerflor

theflooringgroup