

Designer's
Floor Collection



ENGINEERED FLOOR



It is a **100% MADE IN EUROPE** floor.



CE Marking.



Compliance: **CARB2 TSCA Title VI**.



Indoor Air Comfort
Gold-M1-CDPH (VOC).



Good quality-price
ratio.



Fire resistance class
($C_{fi} - s 1$)



Responsible products certified FSC

It is possible to ask
for **FSC®** certified
product



Floors for Less fulfills
the **timber regulation
requirements**,
implementing its due
diligence system.




NAF Adhesives.

MAIN FEATURES


Ultra-resistant
to scrapes and
scratch UV
Lacquer

Finishing




Sheet of veneer
European oak

European Oak



Plywood

Plywood




Birch back

Birch



STRAIGHT PLANK ENGINEERED FLOORING

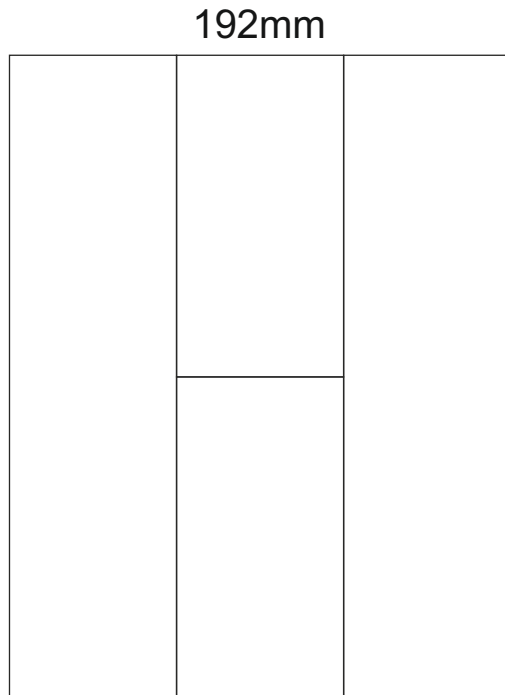


TECHNICAL INFORMATION

Thickness	14mm
Width	190mm
Length	1900mm
Quality	AB
Joining system	Tongue and groove
Installation	Floating or glue-down

Multilayer engineering OAK flooring with CARB2-TSCA certified phenolic birch support. Squaring T&G 4 sides. T&G joint are suitable for mixed installation with our flooring planks.

HERRINGBONE ENGINEERED FLOORING

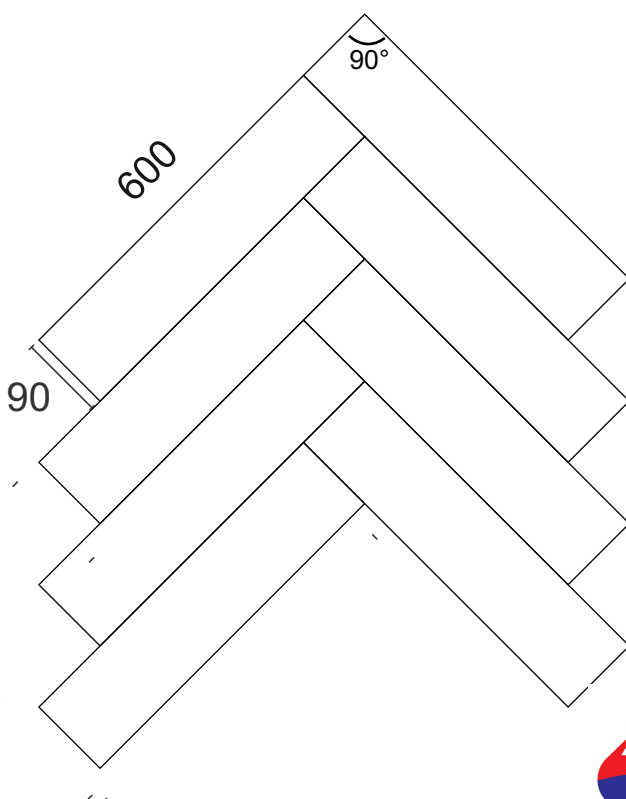







TECHNICAL INFORMATION

Thickness	14mm
Width	90mm
Length	600mm
Quality	AB
Joining system	Tongue and groove
Installation	Floating or glue-down

Multilayer engineering OAK flooring with CARB2-TSCA certified phenolic birch support. Squaring T&G 4 sides. T&G joint are suitable for mixed installation with our flooring planks.



OUR COLORS

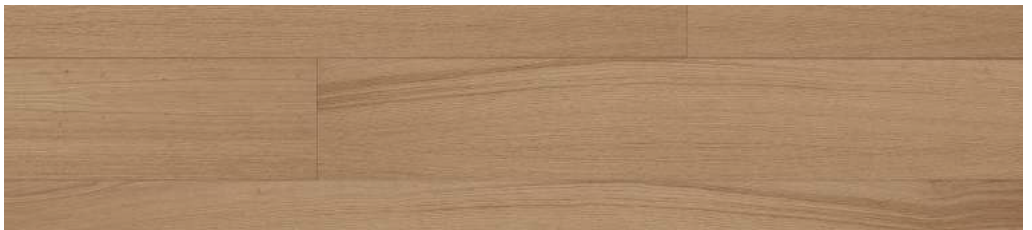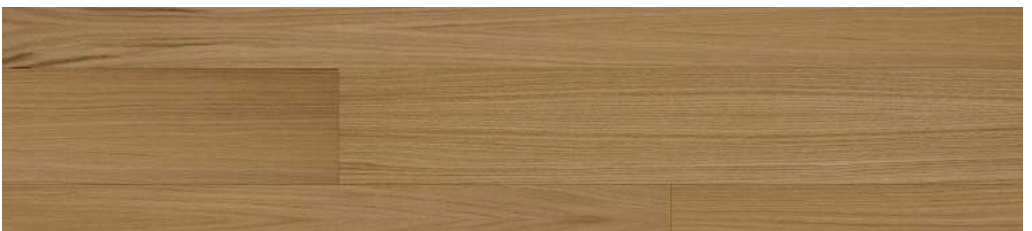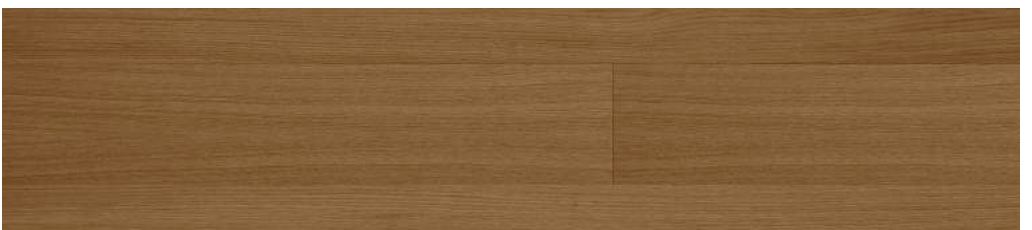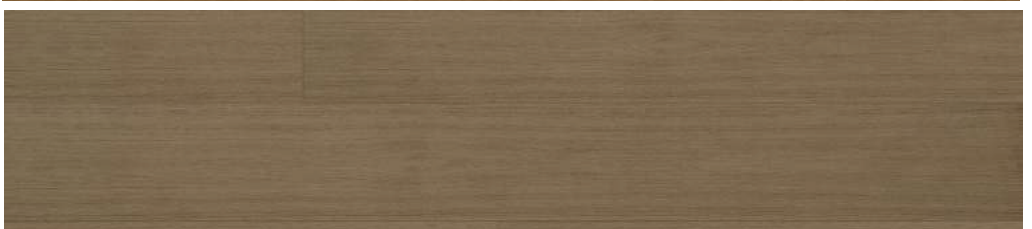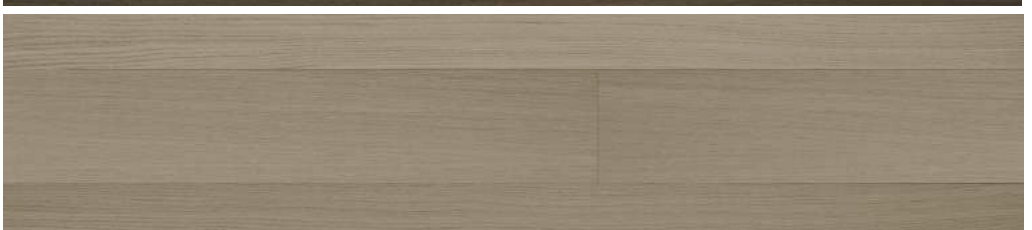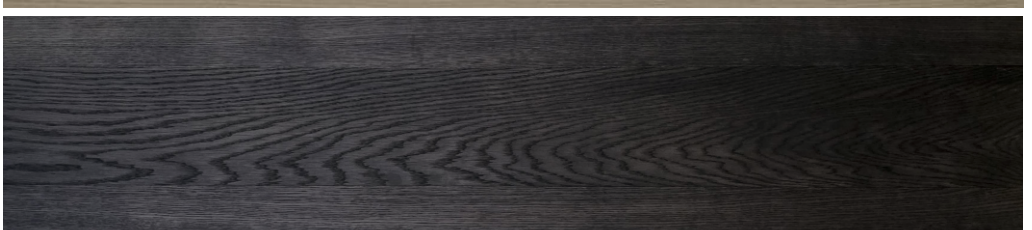VERSACE	
GUCCI	
PRADA	
DIOR	
CHANEL	
HERMES	
TIFFANY	
ARMANI	



CERTIFICATIONS



Floors For Less obtained the Indoor Air Comfort Gold® certification, which guarantees that the product has low emissions, in terms of VOC (volatile organic compounds). It includes the following European regulations on VOC emissions:

- France VOC class A+
- Germany (AgBB/ABG)
- BREEAM international, NOR e NL
- WELL Building
- SKA Rating
- French HQE certification
- Italian regulation on GPP (Green Public Procurement)
- DGNB, BVB (Sweden)
- EU ecolabel
- Nordic Swan
- Blue Angel DE-UZ 176
- Austrian ecolabel criteria UZ 07
- M1
- Danish Indoor Climate Label
- Singapore Green Label
- GreenTag Australia
- Belgian regulation
- E1 classification
- CDPH



Richiedi i prodotti certificati FSC®


FSC® is dedicated to promoting responsible management of the world's forests. Request our FSC® certified products.



The CE marking guarantees quality, safety and end user protection.



Our Multi-layer floor meets the Cfl-s1 fire resistance class requirements, even surpassing the minimum requirement of the EN14342 standard on CE marking. The Multi-layer floor responds to the Dfl-s1 class of fire reaction, provided by the EN14342 standard.



All plywood panels used for our flooring are CARB phase 2 certified and comply with the TSCA Title VI requirements established by the EPA.



We only use NAF (non-added formaldehyde) adhesives in order to comply with our environmental policy aimed at reducing indoor emissions.



Our multi-layers products combine several aspects, such as quality, durability, stability, safety and health, aesthetics. Therefore, every year at the Catas laboratory our floor is subjected to specific tests, which cover each of these aspects and help us monitor and improve the performance.



