




**Edmonton 01**





**Edmonton 04**



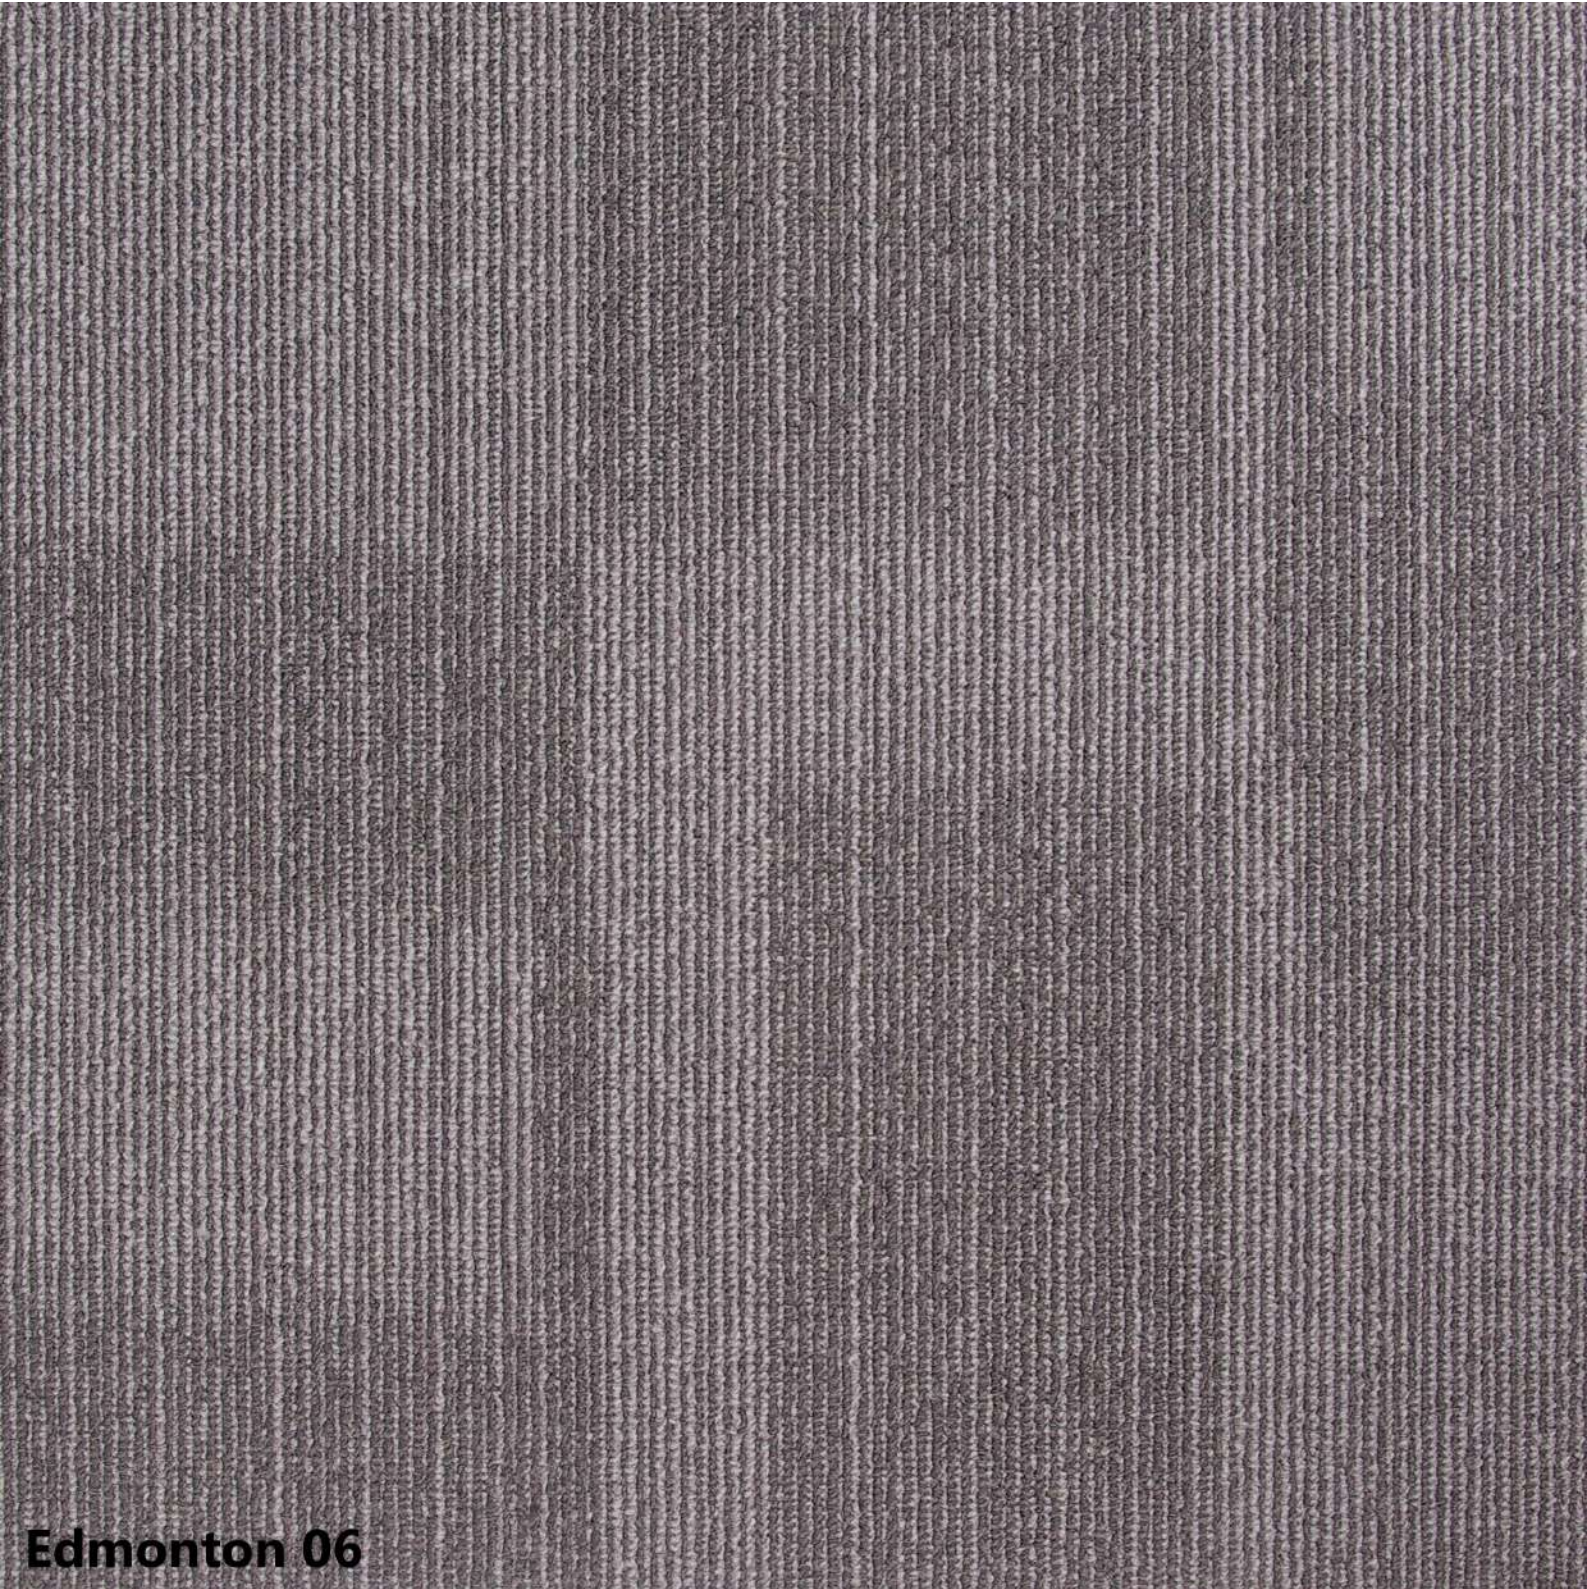

**Edmonton 06**





**Edmonton 07**



## Edmonton

### Specifications

Construction:	multi-level loop
Fiber:	100% Invista Nylon 6
Dye Method:	solution dyed
Gauge:	1/12"
Stitches:	10 per inch
Pile Weight:	17 OZ/yd <sup>2</sup> (580 gms/m <sup>2</sup> )
Pile Height:	3.5mm ± 0.5mm
Total Thickness:	6mm ± 0.5mm
Backing:	PVC with fiberglass
Tile Size:	50cm x 50cm

### Performance

Flammability:	Passes (ASTM E648 / FF 1-70 (8/8))
Smoke Density:	Passes (ASTM E662)
Static Propensity:	≤ 3.0 kV (AATCC 134)
Soil & Stain Protection:	Excellent Soil Resistance
Colour Fastness to Light:	5 (AATCC- 16E)
Colour Fastness to Crocking:	5 (AATCC- 165)
Colour Fastness to Ozone:	5 (AATCC- 129)
Dimensional Stability:	<0.2% (AACHEN)
Dynamic Crush:	Negligible Impact or no change
Delamination Strength:	Excellent (No Separation)

### Warranties

10 years limited warranty.

No more than 10% face yarn loss by weight under normal use.

Limited static warranty.

Limited delamination warranty under normal use.