

ELITE SPC FLOOR

THE NEWEST GENRATION OF LUXURY VINYL FLOORING




**100%
WATERPROOF
FLOORING**



100% WATERPROOF SPC FLOORING

THE NEWEST GENERATION OF LUXURY VINYL
FLOORING

SPC flooring stands for Stone Plastic Composite Vinyl Flooring. It is also called rigid vinyl flooring. Though it is similar to LVT floor, it is not completely the same. It is an upgraded version of LVT. SPC features a stable core comprising of natural lime stone powder, polyvinyl chloride and stabilizers. Top layer of SPC floor protects from wear & tear which makes them more durable. It also gives waterproof performance to the flooring. Special UV layer provide scratch and stain resistant surface which gives comparatively low maintenance. Its rigid core is virtually indestructible making it an ideal choice for high traffic and commercial environments. Its waterproof property makes it a great choice for kitchen and other wet area surfaces. Some of the benefits of SPC flooring are waterproof, fire proof, environmentally friendly, easy to install, multiple style, great durability, easy to maintain etc. It is available in realistic wood designs and stone designs which gives an aesthetic beauty to the floor where it gets installed.

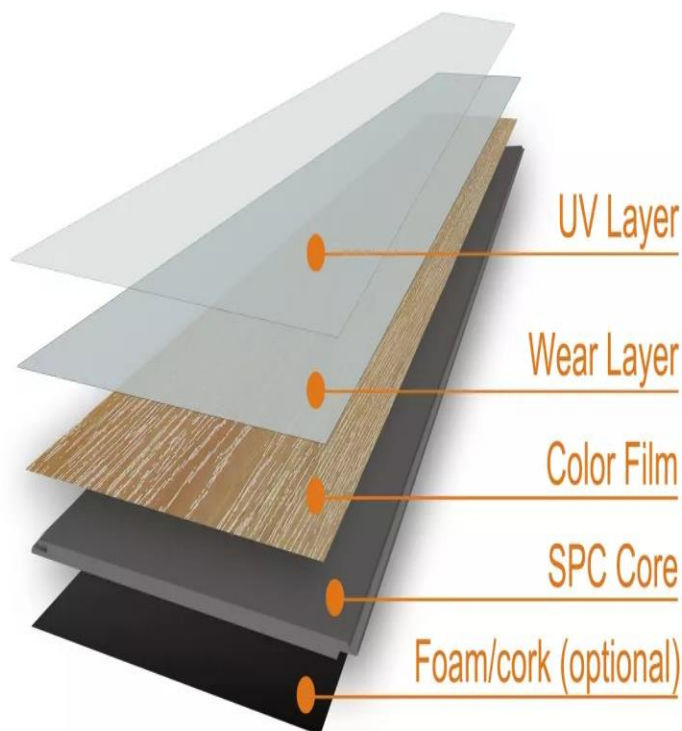

100% WATERPROOF SPC FLOORING

THE NEWEST GENERATION OF LUXURY VINYL
FLOORING



ELITE SPC FLOOR

THE NEWEST GENERATION OF LUXURY VINYL FLOORING



LS-123-5



LS-111-5



LS-130-1



LS-353-09



LS-130-24



LS-130-13



LS-150-1



LS-130-7

100% WATERPROOF SPC FLOORING

THE NEWEST GENERATION OF LUXURY VINYL
FLOORING



ELITE SPC FLOOR

THE NEWEST GENERATION OF LUXURY VINYL FLOORING



LS-130-4



LS-125-16



LS-111-19




LS-111-12



LS-111-40



LS-120-5

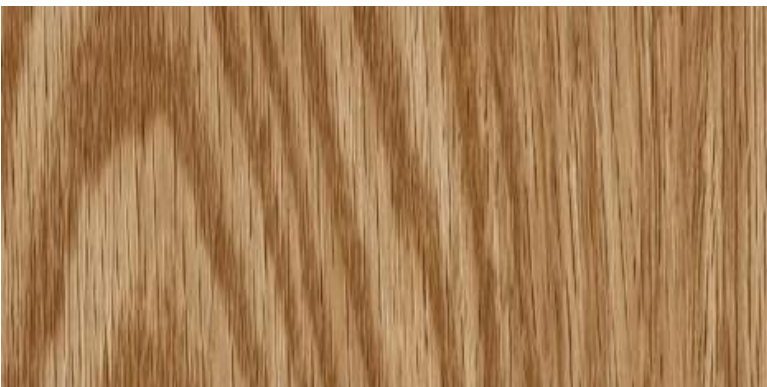

LS-128-9



LS-120-11

100% WATERPROOF SPC FLOORING

THE NEWEST GENERATION OF LUXURY VINYL
FLOORING



SPC Flooring Specifications

Item	British Standard Commercial SPC Flooring, in vinyl plank format
Size	228.6mm Width x 1219.2mm Length
Thickness	5.5mm
Wear layer	0.6mm
Surface Treatment	UV coated/ PU coating
Surface Texture	Embossed / Hand-scraped / EIR / Saw-Cut / Ceramic Bead
Optional	1.5mm/2mm EVA, IXPE or Cork on the back
Click	Unilin Click
Application	Commercial, Residential, Gymnasium Machine Weight, CV
Features	Waterproof / Anti -slip / Wear-resistance / Fire- resistance / Sound barrier/ Anti-Fungal
Delivery time	Stock

Technical Data

Safety Criteria	Standard	Value
Flammability	EN 13501-1	Bf1
Slip resistance	EN13893	DS
Formaldehyde Emission	EN717-1	None
Color Fastness	ISO 105-BO2	≥ 6
Castor Wheel Test	EN425	Pass
Performance	Standard	Value
Wear Resistance	EN-660-2	≤ 0.015g
Flexibility	EN435	No damage
Peel Resistance	EN431	≥ 2.8Kgf/2cm
Residual Indentation	EN434	≤ 0.1mm
Curling After Exposure To Heat	EN434	≤ 1.2mm (80°C, 6hrs)
Dimensional Stability	EN434	≤ 0.12% (80°C, 6hrs)

Description:

- Thickness: 5.5mm including thermo acoustic underlay
- Wear Layer: 0.6mm
- Size: 1219.2mmX228.6mm

Specification:

- Click Type: Click System
- Surface Type: Wood Embossed, Crystal, Mat Square edge with color toning& Sound absorption pad is included

Product Features:

- 100% virgin materials
- No expansion issues even under directly sunlight
- Easier to be installed than other resilient LVT, Laminate etc. Better foot-sense & reduce noise, due to its underlay pad.

Warranty: 05 Years

Structure:

