

ENGINEERED HARDWOOD FLOORING









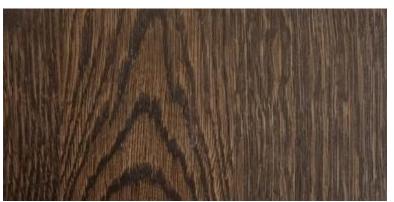

Oak Regal Smoked Stained 3 Strips



Kempas Regal Classic 3 Strips



Jatoba Regal Classic 3 Strips





Ivory 3 Strips



Ash Regal Country 3 Strips



Cherry Country 3 Strips



Doussie Regal Classic 3 Strips





American Walnut 3 Strips



White Stone 3 Strips



Merbau Regal Classic 3 Strips



Maple Regal Classic 3 Strips





Wenge Regal Classic 3 Strips



Teak Regal Classic 3 Strips



Iroko Regal Classic 3 Strips




Jarrah Regal Classic 3 Strips


PRODUCT SPECIFICATION

ENGINEERED WOOD FLOORING

Product	Engineered Wood Flooring
Profile	Tongue and Groove / 5GC loc
Moisture content	6% to 8%
Construction:	
Туре	3 Layer Engineered Flooring
Surface layer composition	3 Strip Random pattern
Core layer	lumber core strip
Bottom veneer	Pine veneer
Dimensions:	
Thickness	14.0mm +/- 0.5mm
Thickness of top layer	3.5mm +/- 0.5mm
Thickness of middle layer (core strip)	8.8mm (+0.2/ -0.1)mm
Thickness of bottom layer (veneer)	2.0mm +/- 0.1mm
Surface layer length (panel)	2190 mm +0/-20mm 1830 mm +0/-20mm (shortfall is compensated by under-declaration of content/pack)
Surface layer width (panel)	190mm +/- 0.1mm
Height difference between panels	0.2 mm (max)
Finishing and Glue:	
Varnish	Treated with water-based Primer + 6 coats of UV Acrylic UV Acrylic/Water based/PU - Bona
Gloss level of surface layer	Matt, low gloss 10% ± 3% Normal gloss 25% ± 5%
Glue	Urea formaldehyde - AICA
Packing	
Quantity per pack	6 pieces
Nested layers	Minimum 5 layers full length, remainder nested.
Standard quantity per pallet	48 packs per pallet











5Gc locking system

