



Engineered Wood Floor

3 STRIPS



Tudor Regal Classic



Oak Regal Smoked Stained



Maple Regal Country



**Oak Regal Country
White Stone**







Oak Regal Country



Ash Regal Country



Cherry Regal Country



Teak Regal Classic








Wenge Regal Classic



Walnut Regal Natural

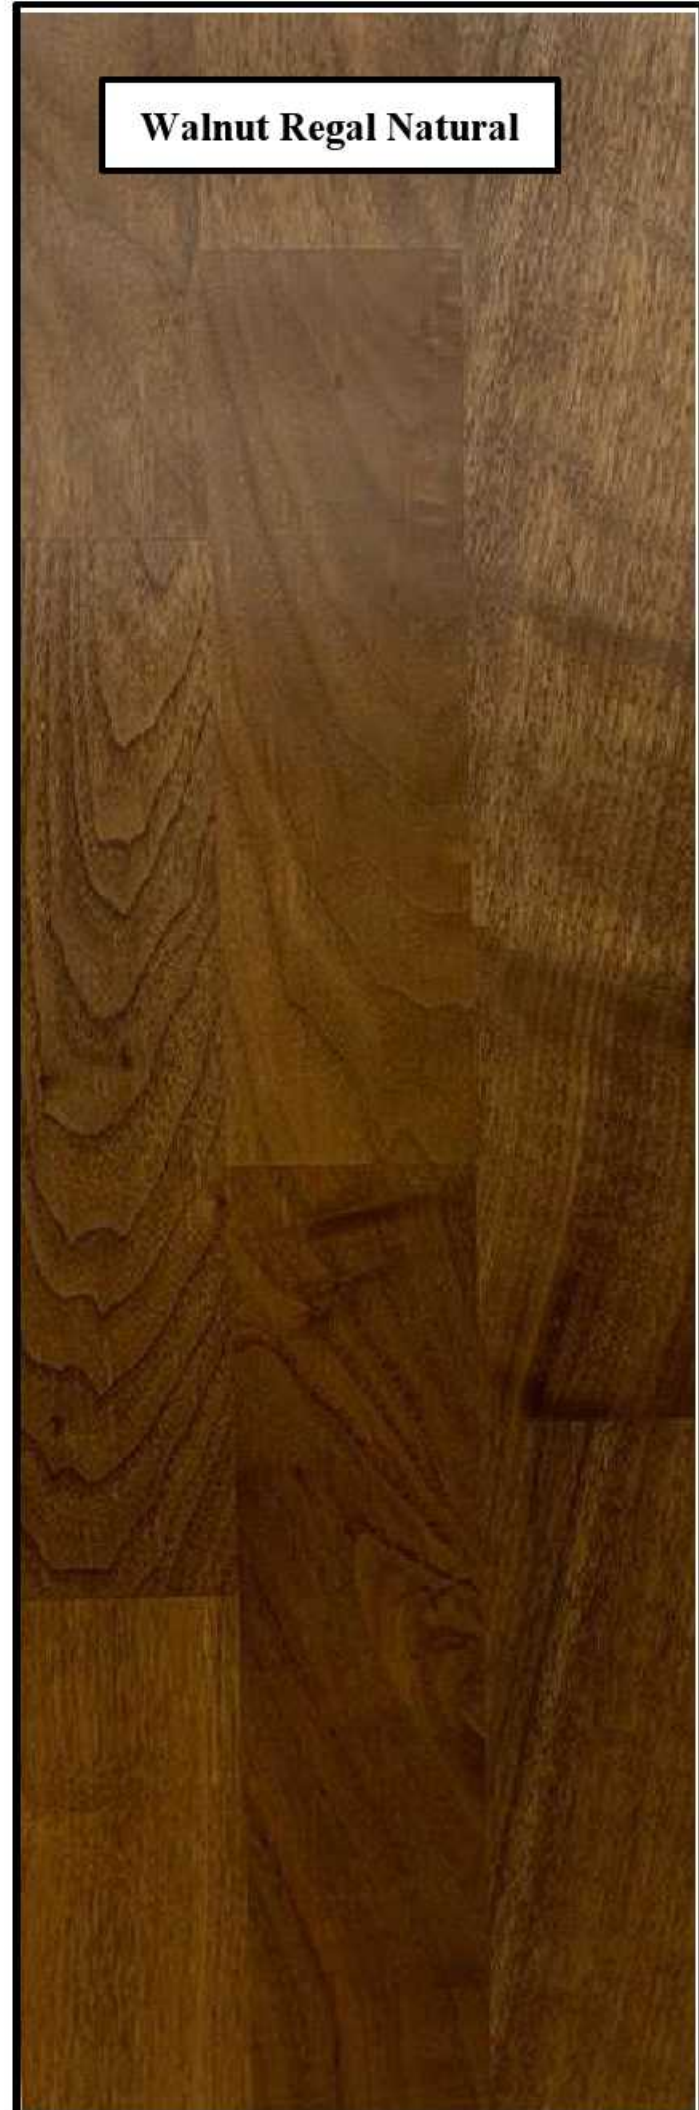



Jarraah Regal Classic



Merbau Regal Classic





Jatoba Regal Classic



Kempas Regal Classic



PRODUCT SPECIFICATION

ENGINEERED WOOD FLOORING

Product	Engineered Wood Flooring	
Profile	Tongue and Groove / 5GC loc	
Moisture content	6% to 8%	
Construction:		
Type	3 Layer Engineered Flooring	
Surface layer composition	3 Strip	Random pattern
Core layer	lumber core strip	
Bottom veneer	Pine veneer	
Dimensions:		
Thickness	14.0mm +/- 0.5mm	
Thickness of top layer	3.5mm +/- 0.5mm	
Thickness of middle layer (core strip)	8.8mm (+0.2/ -0.1)mm	
Thickness of bottom layer (veneer)	2.0mm +/- 0.1mm	
Surface layer length (panel)	2190 mm +0/-20mm 1830 mm +0/-20mm (shortfall is compensated by under-declaration of content/pack)	
Surface layer width (panel)	190mm +/- 0.1mm	
Height difference between panels	0.2 mm (max)	
Finishing and Glue:		
Varnish	Treated with water-based Primer + 6 coats of UV Acrylic UV Acrylic/Water based/PU - Bona	
Gloss level of surface layer	Matt, low gloss 10% \pm 3% Normal gloss 25% \pm 5%	
Glue	Urea formaldehyde - AICA	
Packing		
Quantity per pack	6 pieces	
Nested layers	Minimum 5 layers full length, remainder nested.	
Standard quantity per pallet	48 packs per pallet	

