



SPLINTER - 501

# Eros

## Specifications

Use Classification	Medium Commercial - Class 32
Product Description	Medium Commercial PP Tufted Loop Pile Bitumen Tile Stainproof Miracle Fibre -Polypropylene
Yarn Type	
Yarn Mass	±515g/m² (±15)
Pile Height	±4mm (±0.5)
TotalThic kness	±6.0mm (±0.5)
TotalMass **	±3892g/m² (±5%)
Standard Size	50x50cm
Standard Backing Type	NexBac (NB)
Machine Gauge	1/10"
Stitches / 10 cm	35 (±1)
Fire Classification	Bfl-s1
Colour Fastness To:	
i) Light	>6.0 (NF EN ISO 105-B02)
ii) Rubbin g (staining)	4-5 (ISO 105-X12)
iii) Water (staining)	4-5 (ISO 105-E01)
Electrostatic Propensity	≤ 2kV (ISO 6356:2012)
Sound Absorption	aw: 0.15 (ISO 354: 2023)
Sound Insulation	25dB (ISO 10140-3: 2021)
Thermal Resistance	0.0740 m².KW (ISO 8302: 2001)
Dimensional Stability	≤ 0.2% (ISO 986: 2006)
VOC Emissions	Passed (ASTM D5116: 2017)
Castor Chair Suitability	Occasional Use (NF EN 985 –Method A)
Guarantee	10 years
Warranty	5 Years
** Weighted Average	






# Eros

504 - SMOKEY





EROS SPLINTER - 501

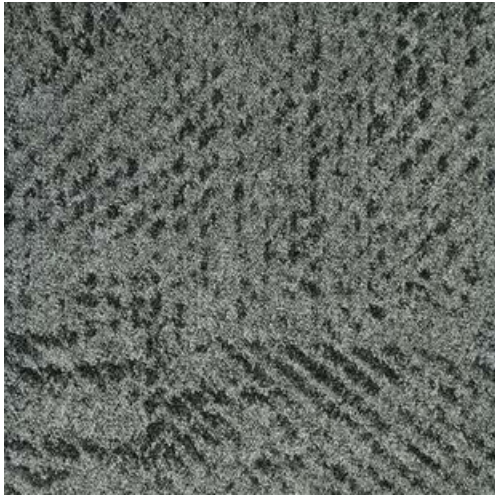

EROS CHARCOAL - 502



EROS CHOCOLATE - 503



EROS SMOKEY - 504



EROS AQUA - 505



Staircase  
Suitable



Underfloor  
Heating



Medium/General  
Commercial



Heavy  
Commercial



Eco-Friendly



Institution



Hospitality



Modular



Product characteristics may vary due to the nature of manufacture. To combat colour variance do not install more than one dye lot in a single installation. A join line will be visible on plank and tile products due to the format of the design repeat - if you would not like a visible join, alternate the direction of the installation to your desired aesthetic. Sample swatches have been cut from an overall design; therefore, the decoration and shades may vary. A difference in appearance from the pattern is likely, as the product is not intended to have a uniform appearance