


One Stop Solutions for Interior Fitouts



The Ultimate Adhesive



Pidilite Industries Ltd, established in India 1959 an Innovative Indian Multinational providing quality and effective solutions worldwide.



Direct presence in the Middle East since 2002.

State of the art manufacturing unit in Dubai Investment Park



Our Solutions conform to DCL standards and we are ISO certified

7

Global Manufacturing Locations



100+

Global Sales Partners

1300+

SKUs Exported Every Year

25+

Brands

9000+

Happy Employees

One Stop Fitout Solutions Partner



Single Window Communication

Key Account Service approach via dedicated account manager



Comprehensive End to End FitOut Solutions

Waterproofing, Tiling, Resilient Flooring, Epoxy Flooring, HVAC, Woodworking and Interior Decor



Technical Training

For Your Team; Classroom and Hands on application



Onsite Assistance

Training and Execution of systems



Streamline Supply Chain

Ensuring Customer Delight

Contents



FLOORING

Tile and Stone Installation

Tile on Tile, Stone on Tile	08
Marble, Stone Installation (Floor)	10
Tile Installation on Drywall, Cement, Gypsum Board	12
External Cladding Tile on Façade Wall / Tiles	14
Floor and Wall (Internal/External)	16

Resilient Flooring

PVC / Vinyl / LVT	20
Carpet / Textile	22
Parquet	24
Raised	26
Rubber	28
Artificial Grass	30

Resin Flooring

Anti Skid Finish	34
Smooth Finish	36
Epoxy Self Levelling	38




WATERPROOFING

Swimming Pools	42
Wet Areas Bathroom / Kitchen / Balconies	44
Internal Wall Dampness	46



Tile and Stone Installation




Tile on Tile, Stone on Tile

Marble, Stone Installation (Floor)

Tile Installation on Drywall, Cement, Gypsum Board

External Cladding Tile on Façade Wall / Tiles


Solutions for Fixing Tiles on Wall and Floor. Internal / External

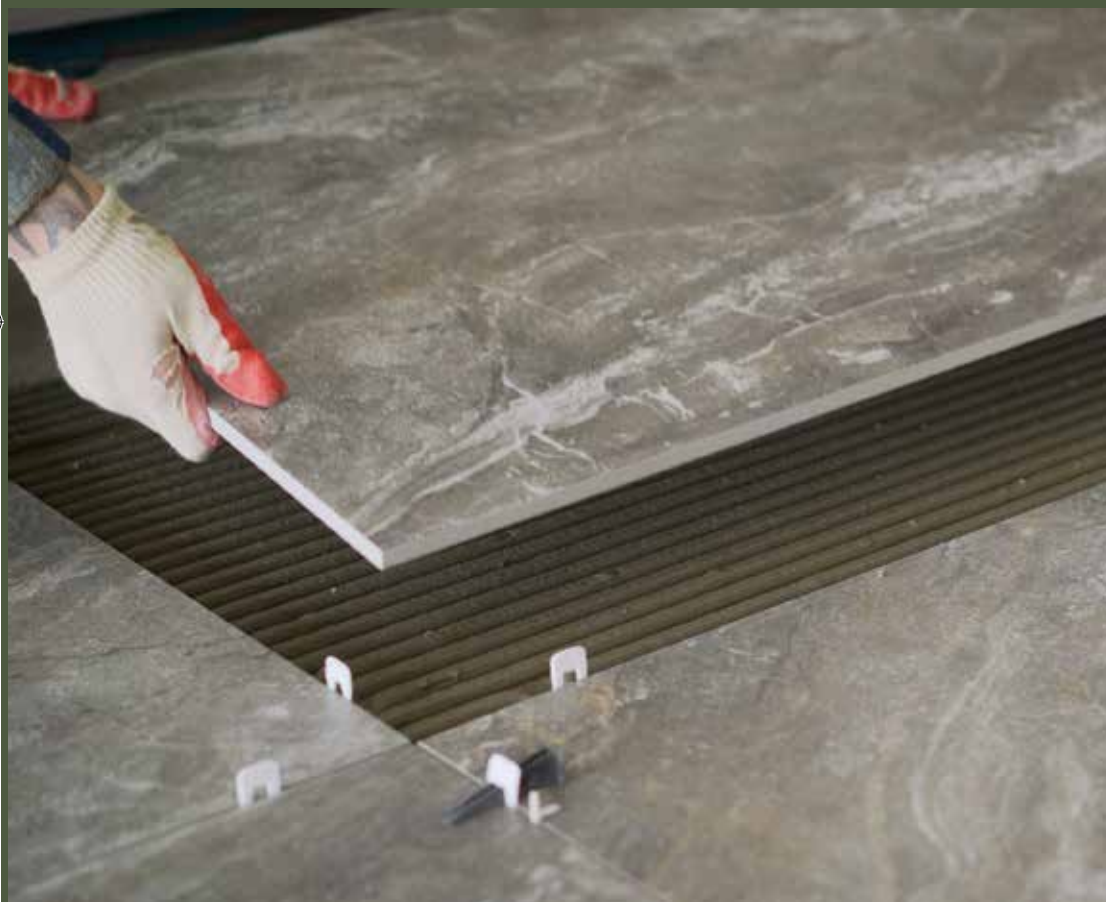

TILE AND STONE INSTALLATION

Tile on Tile, Stone on Tile

System for installing
Tile or Stone (new) on
existing Tiled surface (old)

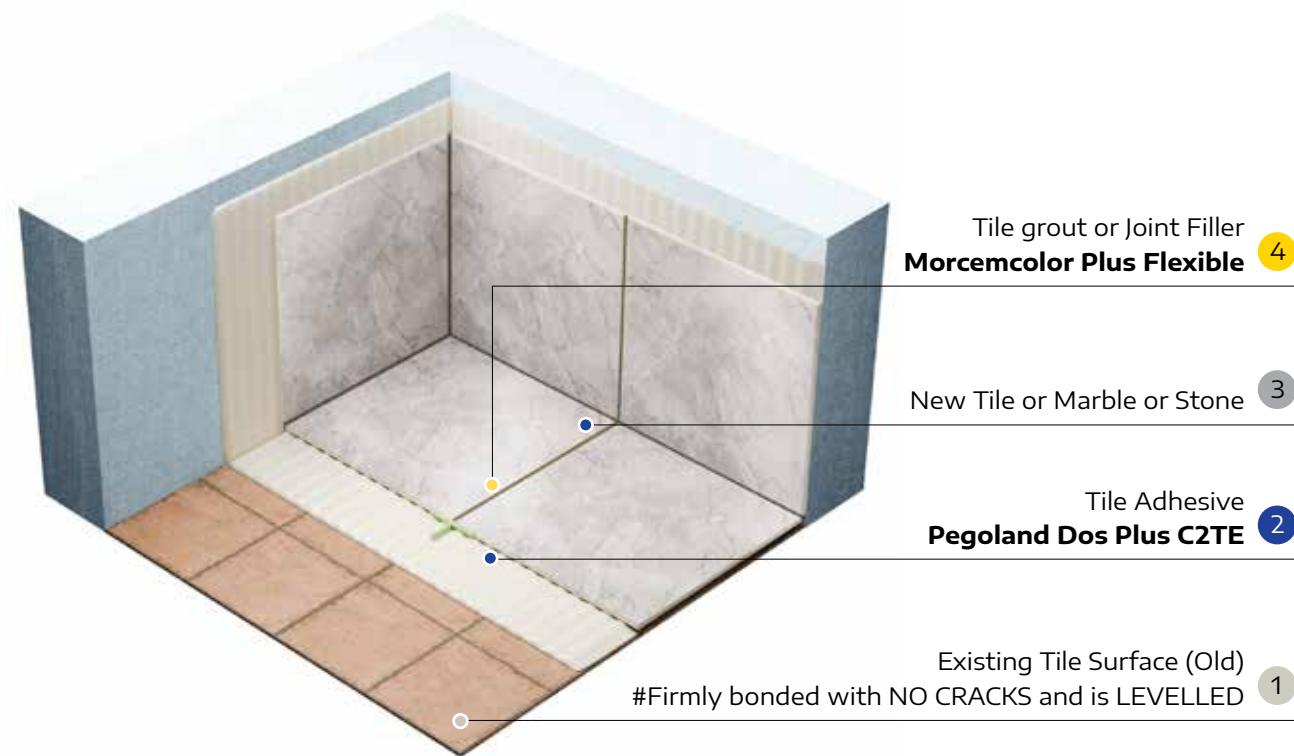

ADVANTAGE

- Fast renovation turnaround, with no breaking of old tiles or slab damage.
- No primer required.
- High Durability, Extended Open time & No Slip for Vertical surfaces.

#If existing tile surface is cracked/ loose, use repair mortar - Morcemseal Todo 1. *** Tile Adhesive Grade for use varies due to conditions on site, above suggestions are general solutions, for a more detailed consultation specific to your site please connect with Pidilite team.



AREAS OF USE

Renovating old floors and walls.
Internal Floor and Wall, External
Floor and Wall (upto 3 Mtr.)
Villas, Apartments, Retail
Showrooms, Lobbies

2

Tile Adhesive



For Tiles - Pegoland Dos Plus C2TE Grey

For Marble, Stone - Pegoland Dos Plus C2TE White

Tile on Tile specialist

Marble or Stone on Tile specialist

No Primer Required

Pack Size: 25 kg

4

Tile Grout



**Morcemcolor Plus Flexible
- CG2WA Cementitious grout**


with Aquastop effect and Bioactive
technology. Available in 26 shades

Pack Size: 5 kg

TILE AND STONE FIXING

Marble, Stone Installation (Floor)

System for Installing Marble, Stone on Cementitious Floor

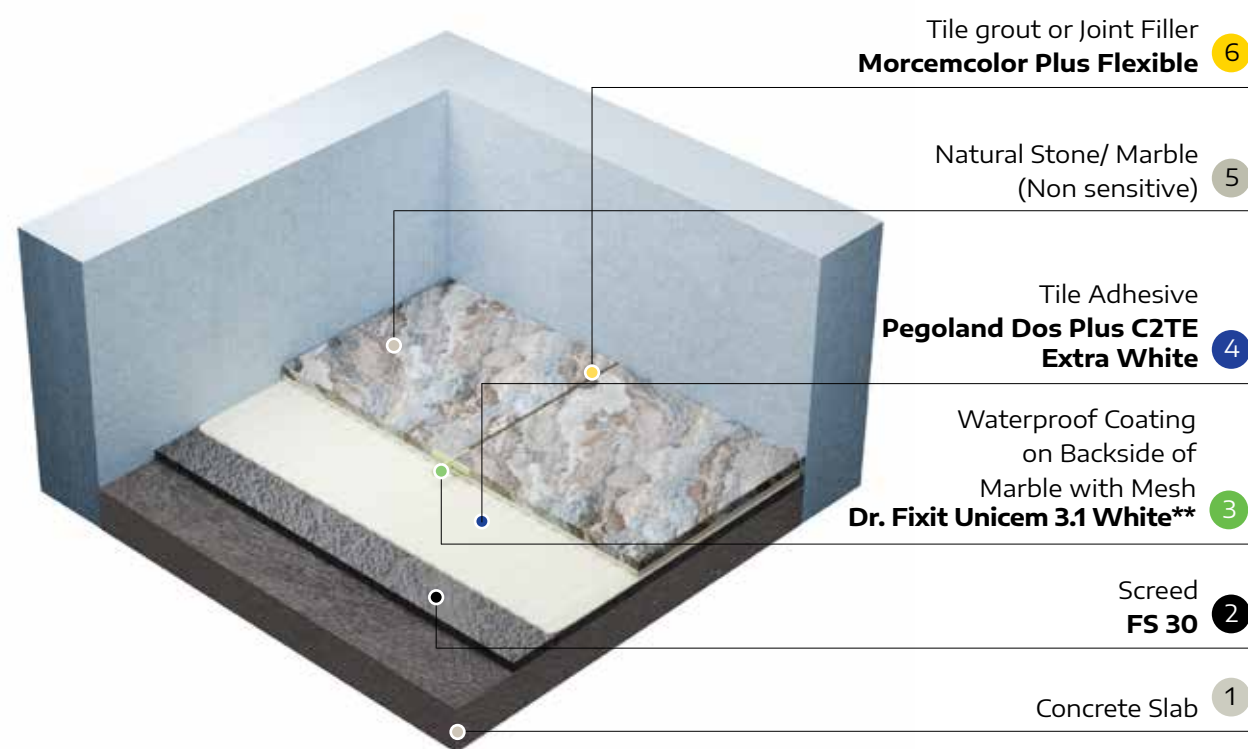

Tile grout or Joint Filler
Morcemcolor Plus Flexible 6

Natural Stone/ Marble
(Non sensitive) 5

Tile Adhesive
Pegoland Dos Plus C2TE Extra White 4

Waterproof Coating
on Backside of
Marble with Mesh
Dr. Fixit Unicem 3.1 White** 3

Screed
FS 30 2

Concrete Slab 1

2

Screed



FS 30
10-50 mm thickness
Compressive Strength
≤30 N/mm²

FS 20
10-50 mm thickness
Compressive Strength
≤20 N/mm²

Pack Size: 50 kg

3

Waterproof Coating



Dr. Fixit Unicem 3.1 - WHITE
2K Cementitious
Waterproof Coating.
40%+ Elongation, 500
micron DFT in 1 coat.
** coating is applied
on back side of marble
during fabrication,
before fixing with
tile adhesive

Pack size: 20 kg

4

Tile Adhesive



Pegoland Dos Plus C2TE - White/Extra White
Fix Large Tiles and Natural
Stones on Interior Floor
and Wall and Exterior Floor
and Wall (upto 3M).

Pack Size: 25 kg

6

Tile Grout



Morcemcolor Plus Flexible - CG2WA
Cementitious grout
with Aquastop
effect and Bioactive
technology. Available in
26 shades

Pack Size: 5 kg



ADVANTAGE

- Complete system for a worry free installation.
- Extra white adhesive and white cementitious coating to ensure no staining from backside of Marble/ Stone.
- High Durability, Extended Open time

*** Tile Adhesive Grade for use varies due to conditions on site, above suggestions are general solutions, for a more detailed consultation specific to your site please connect with Pidilite team.




AREAS OF USE

Internal and External Floors,
Suitable for Marble/ Stone size
upto 1200mm x 1200 mm

TILE AND STONE FIXING

Tile Installation on Drywall, Cement, Gypsum Board

System for Installing Tile on Drywall substrate like Cement board, Plaster board and Gypsum board

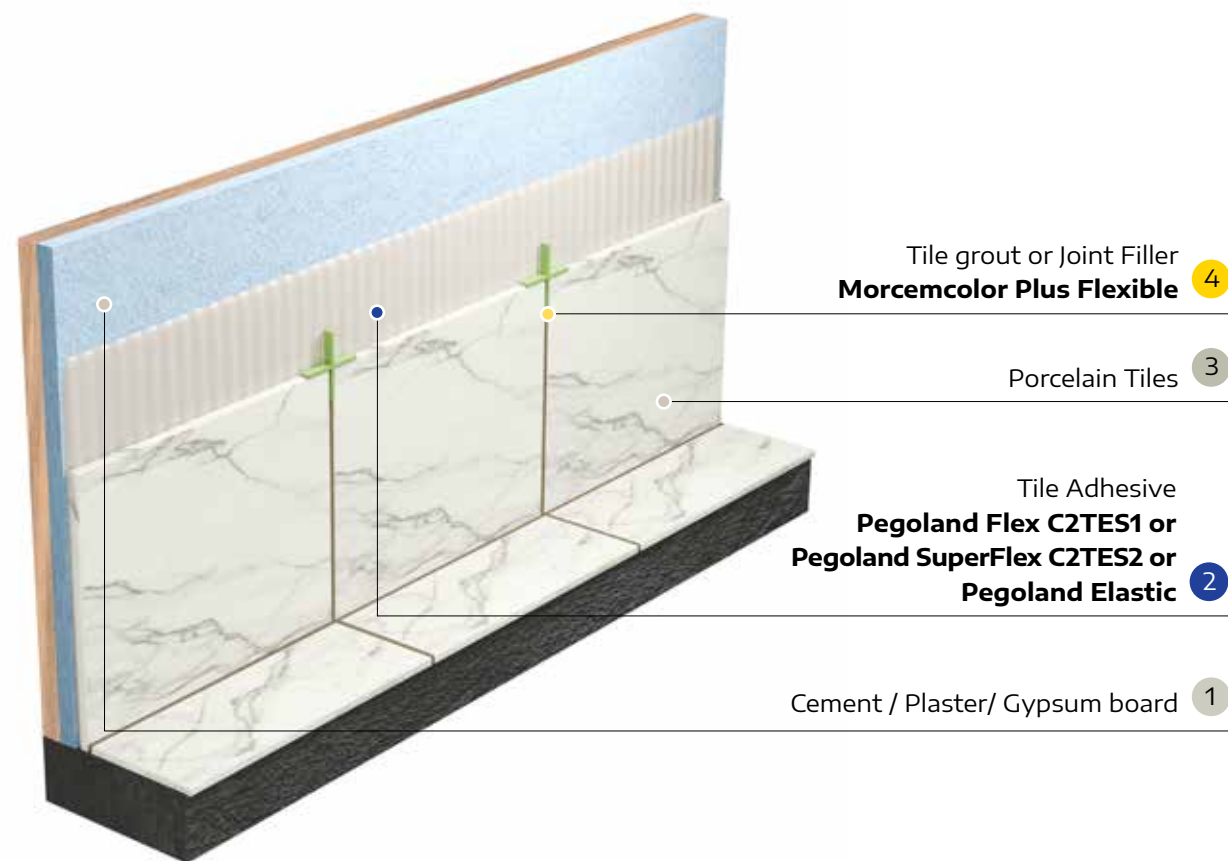

ADVANTAGE

- Simple System, with Multi Adhesive choice basis Deformability requirement.
- No Primer Needed for Cementitious Adhesives - Cost and Time saving.
- High Durability, Extended Open time.

Tile Adhesive Grade for use varies due to conditions on site, above suggestions are general solutions, for a more detailed consultation specific to your site please connect with Pidilite team.



AREAS OF USE

Partition Walls in Residential and Commercial Spaces both Internal and External.

2

Tile Adhesive



Pegoland Flex - C2TES1

Cementitious Tile Adhesive (2-5 mm deformability)

Pack Size: 25 kg



Pegoland SuperFlex C2TES2

Cementitious Tile Adhesive (> 5 mm deformability)

Pack Size: 25 kg



Pegoland Elastic R2T

PU Hybrid Epoxy Tile Adhesive, Superelastic

Pack Size: 10 kg

4

Tile Grout



Morcemcolor Plus Flexible - CG2WA

Cementitious grout with Aquastop effect and Bioactive technology. Available in 26 shades

Pack Size: 5 kg

TILE AND STONE FIXING

External Cladding Tile on Façade

System for Installing Tiles
(any size) on External Façade.



Movement Joints
Dr. Fixit PU Sealant 6

Door/ Window Frame Sealant
Dr. Fixit GP Silicone Sealant 5

Tile Joint Filling
Roff Starlike 4

Porcelain Tiles
Any size, Any Height 3

Tile Adhesive
**Pegoland Flex C2TES1 or
Pegoland SuperFlex C2TES2** 2

Rendered Façade 1

2

Tile Adhesive



Pegoland Flex - C2TES1

Cementitious Tile
Adhesive (2-5 mm
deformability)

Pack Size: 25 kg



Pegoland SuperFlex C2TES2

Cementitious Tile
Adhesive (> 5 mm
deformability)

Pack Size: 25 kg

4

Tile Grout



Roff Starlike - RG, R2T

2K High Performance
Epoxy Grout
UV Resistant

Pack Size: 5 kg

5

6

Sealant



Dr. Fixit - GP Silicone Sealant

Premium grade, UV and
Weather Resistant
Antibacterial,
Antifungal

Pack Size: 280 g



Dr. Fixit - PU Sealant

Advanced 1 Component
PU Sealant
High Performance, UV
resistant, Durable

Pack Size: 600 ml



ADVANTAGE

- Complete System, with Multi Adhesive choice basis Deformability requirement.
- UV Resistant epoxy grout and sealants, best in class.
- Extended Open time to enable ease of Installation for large Slabs.



AREAS OF USE


External Façade fixing
of Tiles of Any Size at
Any Height

Floor and Wall (Internal/External)


Solutions for Fixing Tiles
as per size on Internal and
External Floor and Wall

								
	Ceramic tiles Upto 600 mm x 600 mm	Porcelain tiles & Stone Upto 600 mm x 600 mm	Porcelain tiles & Stone Upto 900 mm x 900 mm	Porcelain tiles & Stone Upto 1200 mm x 1200 mm	Porcelain tiles & Stone Greater than 900 mm x 900 mm (no mesh backing)	Porcelain tiles & Stone Greater than 1200 mm x 1200 mm	Tile joint width Width of joint 2-15 mm	Tile joint width Width of joint 2-15 mm
								
		Swimming Pool Mosaic tiles Upto 50 mm	Swimming Pool Mosaic tiles Upto 50 mm	Swimming Pool Tiles Upto 300 mm x 300 mm	Swimming Pool Tiles greater than 300 mm x 300 mm	Swimming Pool Tiles greater than 600 mm x 600 mm		
USED FOR	Fixing ceramic tiles on interior floor and walls and exterior floor	Fixing porcelain tiles and stones in wet areas (bathroom) on interior floor and wall	Fixing large tiles and stones on interior floor and wall (upto 3 m) and exterior floor	Fixing large tiles and natural stones on interior floor and wall and exterior floor and wall (upto 3 m) Tile on tile fixing specialist	Fixing large slab tiles and stones on interior floor, wall and exterior floor and façade. Swimming pools tile fixinging specialist	Fixing large slab tiles and stones on interior floor, wall and exterior floor and façade. External cladding, facade specialist	Grouting internal and external tile and stone joints	Grouting specialist for tile joints and stone in swimming pools and wet areas
SUBSTRATES	Conventional cement based substrates	Conventional cement based substrates	Conventional cement based substrates Compatible with all types of plasterboard drywalls and gypsum board substrates. No primer required	Conventional cement based substrates Compatible with all types of plasterboard drywalls and gypsum board substrates. No primer required	Conventional cement based substrates Compatible with all types of plasterboard drywalls and gypsum board substrates. No primer required	Conventional cement based substrates Compatible with all types of plasterboard drywalls and gypsum board substrates. No primer required	All terrain compatibility	All terrain compatibility
SOLUTION	  Pack Size: 25 kg	  Pack Size: 25 kg	  Pack Size: 25 kg	  Pack Size: 25 kg	  Pack Size: 25 kg	  Pack Size: 25 kg	  Pack Size: 5 kg	  Pack Size: 5 kg

Resilient Flooring




PVC / Vinyl / LVT
Carpet / Textile
Parquet
Raised
Rubber
Artificial Grass

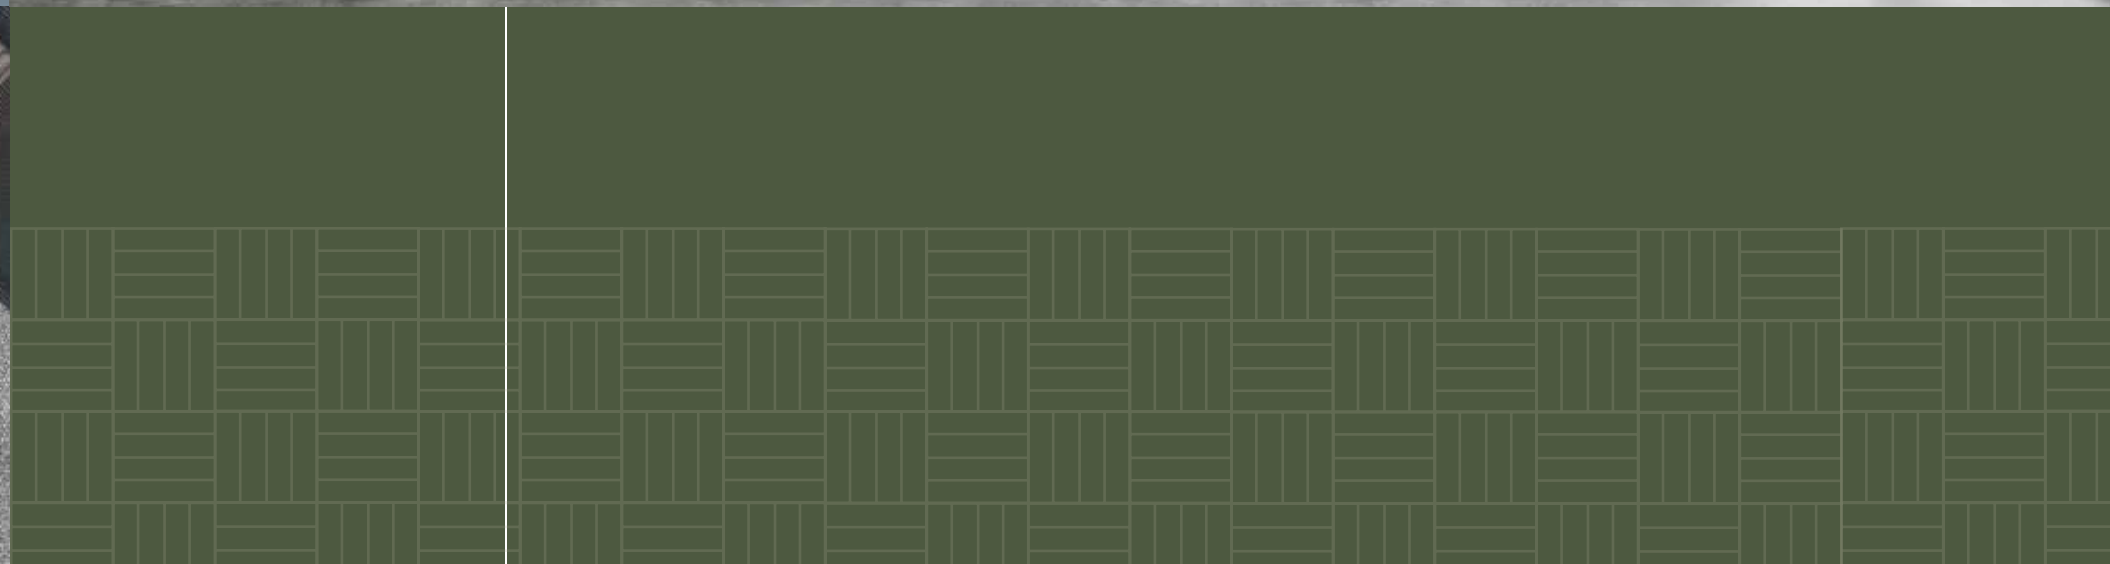

PVC, Vinyl, LVT Flooring

System for installing PVC,
Vinyl, Luxury Vinyl Tiles on Floor

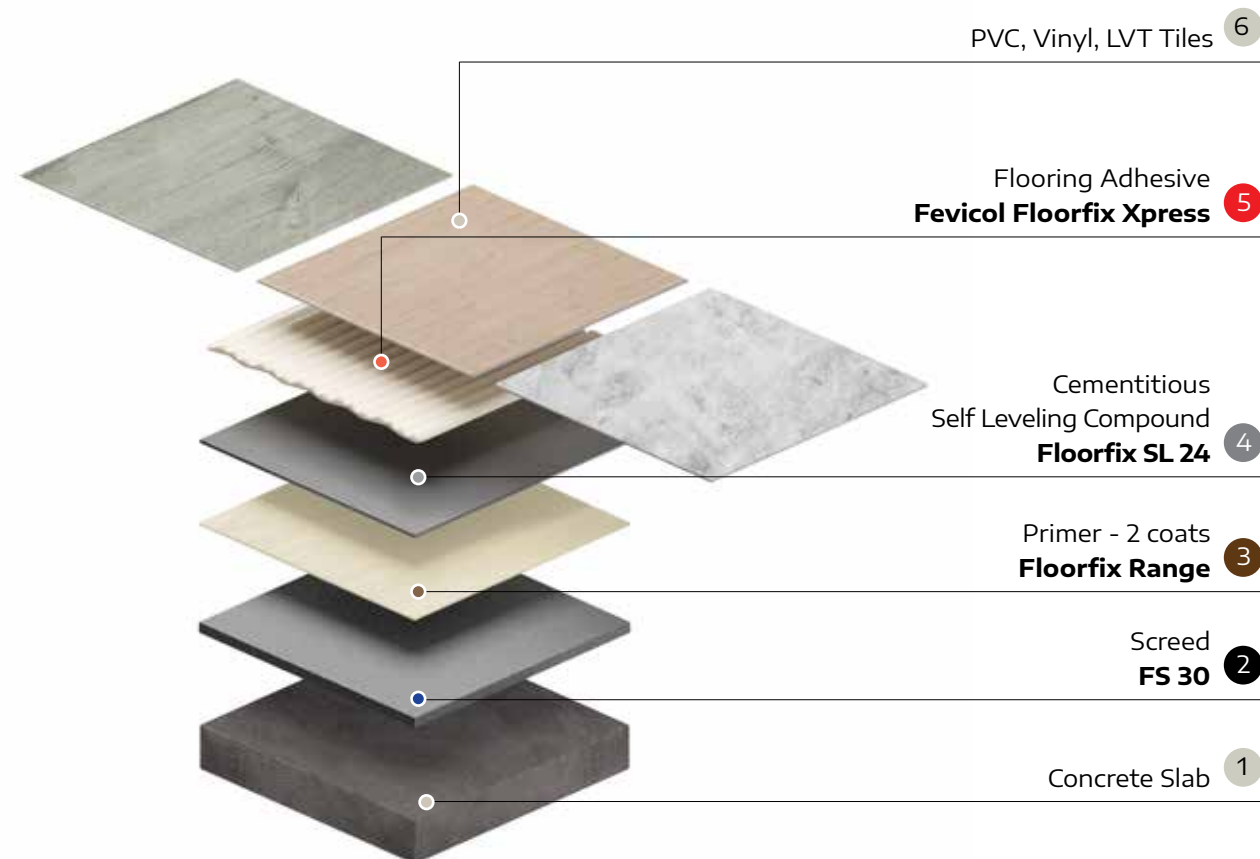

ADVANTAGE

- Low VOC (LEED EQ 4.1), Asbestos, Lead free Adhesive.
- Durable, Smooth Finish, High Coverage and High Strength SLC and Screed.
- Complete Primer system enabling application across substrates and conditions.



AREAS OF USE

Schools, Hospitals,
Restaurants, Office
Workspaces, Balconies,
Patios.

2

Screed



FS 30

10-50 mm thickness
Compressive Strength
 $\leq 30 \text{ N/mm}^2$

FS 20

10-50 mm thickness
Compressive Strength
 $\leq 20 \text{ N/mm}^2$

Pack Size: 50 kg

3

Primers



Floorfix D53

For absorbent and
dense substrates

Pack Size: 10 kg



Floorfix D63

For non absorbent
subfloors

Pack Size: 10 kg



Floorfix VEP93 **

2K Epoxy primer, Vapour
barrier for surfaces with
3.5% - 6.9% moisture

Pack Size: 10 kg

4

Self leveling Compound



Floorfix SL 24

1 to 10 mm thickness
Compressive Strength
 $> 24 \text{ N/mm}^2$

Pack Size: 25 kg

5

Flooring Adhesive




Fevicol Floorfix Xpress

Multipurpose acrylic
adhesive, High Tack

Pack Size: 15 kg

Carpet, Textile Flooring

System for Wall to Wall installation of Carpet (Broadloom), Textile Tiles.

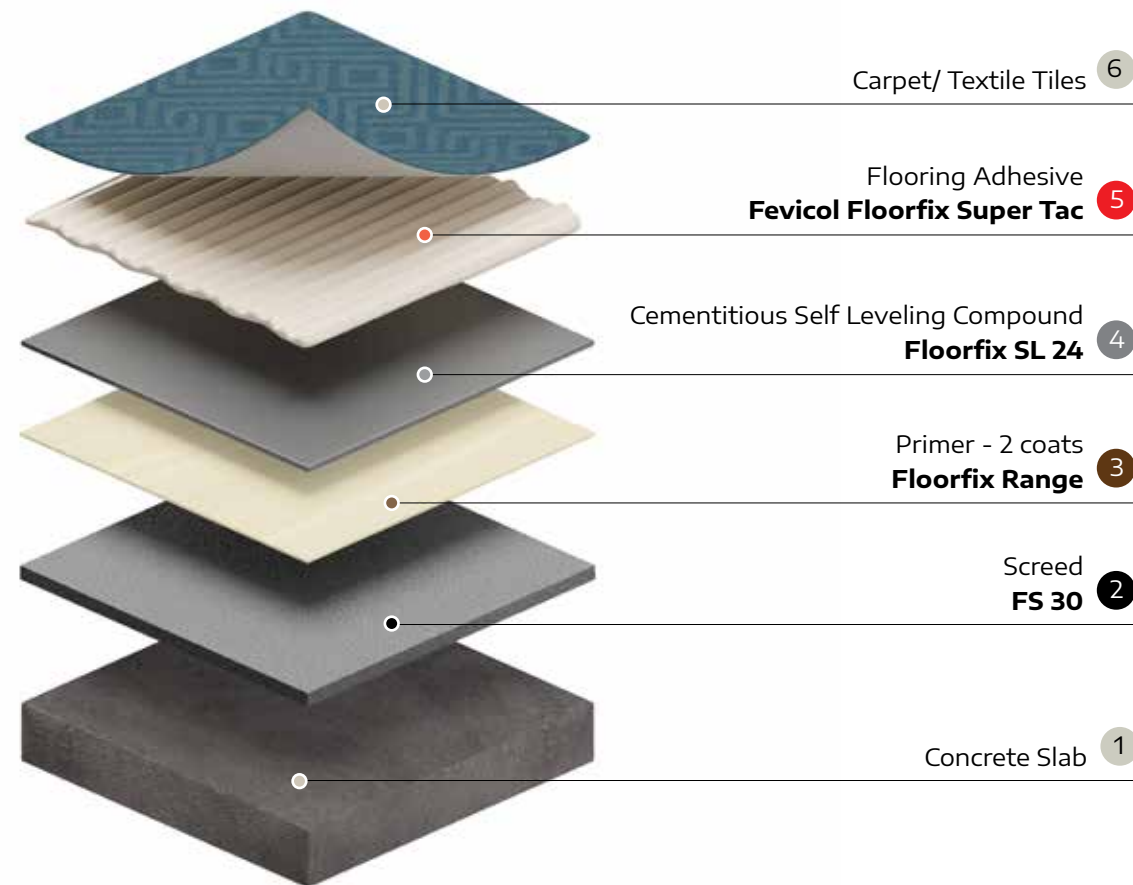

ADVANTAGE

- High tack adhesive, roller applied. Easy replacement of worn out carpet Tiles.
- Low VOC (LEED EQ 4.1), Solvent Free System.
- Complete Primer system enabling application across substrates and conditions.



AREAS OF USE

Hotels, Boardroom & Meeting Rooms, Banquet Halls, Restaurants, Lobbies, etc.

2

Screed



FS 30

10-50 mm thickness
Compressive Strength
 $\leq 30 \text{ N/mm}^2$

FS 20

10-50 mm thickness
Compressive Strength
 $\leq 20 \text{ N/mm}^2$

Pack Size: 50 kg

3

Primers



Floorfix D53

For absorbent and dense substrates

Pack Size: 10 kg



Floorfix D63

For non absorbent subfloors

Pack Size: 10 kg



Floorfix VEP93 **

2K Epoxy primer, Vapour barrier for surfaces with 3.5% - 6.9% moisture

Pack Size: 10 kg

4

Self leveling Compound



Floorfix SL 24

1 to 10 mm thickness
Compressive Strength
 $> 24 \text{ N/mm}^2$

Pack Size: 25 kg

5

Flooring Adhesive



Fevicol Floorfix Supertac

Solvent Free, Water Base, Acrylic Tackifier (Pressure Sensitive Adhesive).

Pack Size: 15 kg

Parquet Flooring

System for installing
wooden panels in geometric
patterns on Floor



ADVANTAGE

- Elastically Deformable, Water and Solvent Free adhesive, no Swelling.
- Durable, Smooth Finish, High Coverage and High Strength SLC and Screed.
- Complete Primer system enabling application across substrates and conditions



AREAS OF USE

Villas, Showrooms,
Lobbies, Restaurants
and Patios

2

Screed



FS 30

10-50 mm thickness
Compressive Strength
 $\leq 30 \text{ N/mm}^2$

FS 20

10-50 mm thickness
Compressive Strength
 $\leq 20 \text{ N/mm}^2$

Pack Size: 50 kg

4

Self leveling Compound



Floorfix SL 24

1 to 10 mm thickness
Compressive Strength
 $> 24 \text{ N/mm}^2$

Pack Size: 25 kg

3

Primers



Floorfix D53

For absorbent and
dense substrates

Pack Size: 10 kg



Floorfix D63

For non absorbent
subfloors

Pack Size: 10 kg



Floorfix VEP93 **

2K Epoxy primer, Vapour
barrier for surfaces with
3.5% - 6.9% moisture

Pack Size: 10 kg

5

Flooring Adhesive



Stauf PUK 447

Solid Wood Specialist

2K Elastic PU wood
flooring adhesive. Fast
settin

Pack Size: 9.8 kg




Stauf Multilayer Engineered Wood Specialist

1K Elastic Hybrid Wood
flooring adhesive

Pack Size: 18 kg

Raised Flooring

System for installing Pedestals on subfloor to create a raised floor on which carpet tiles are fixed.

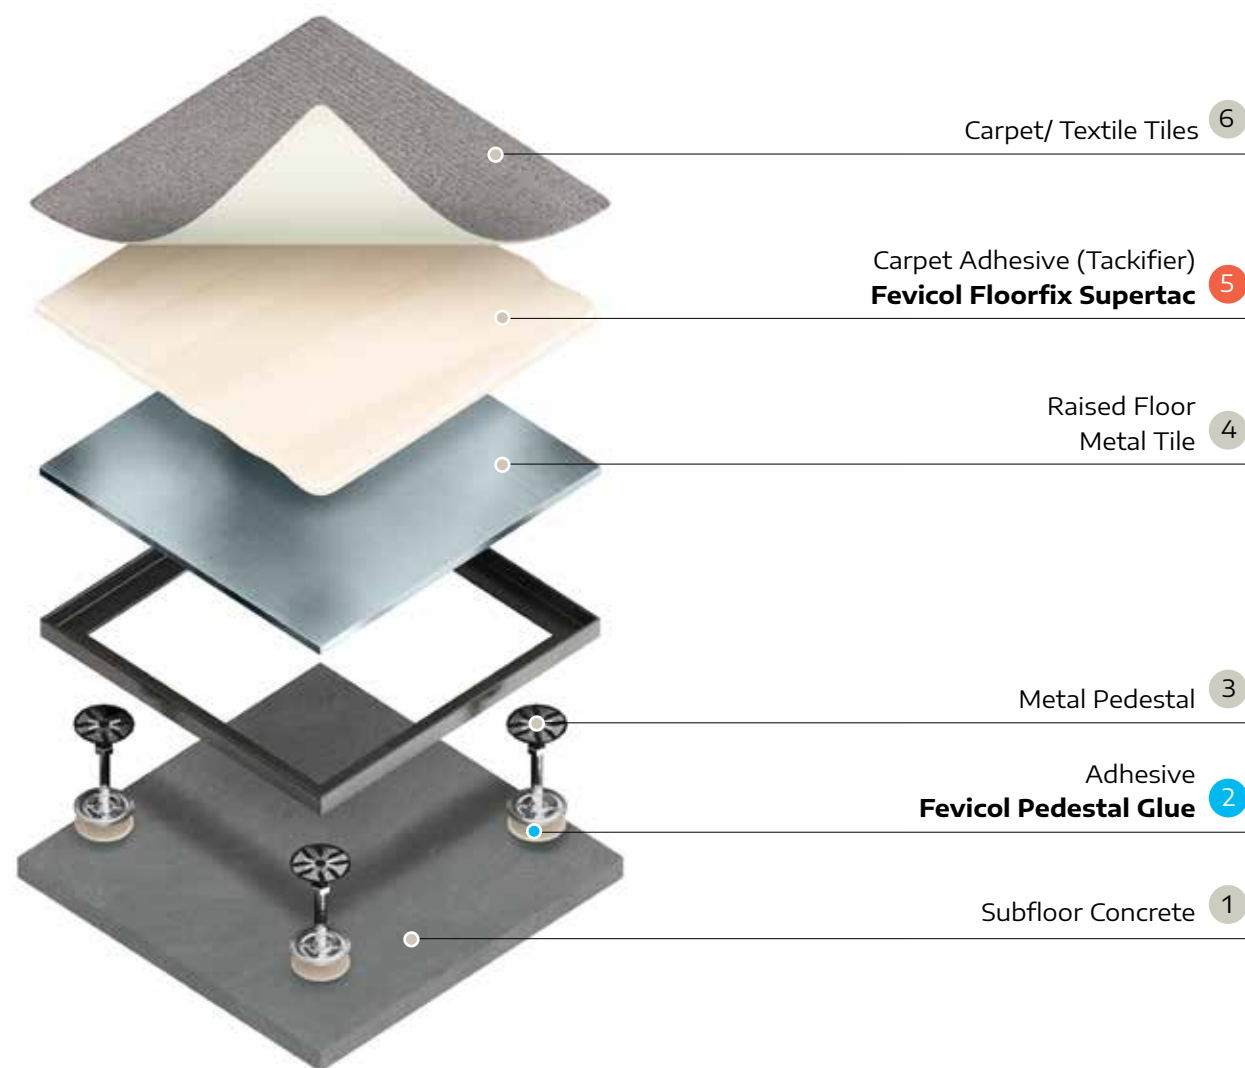

ADVANTAGE

- Solvent Free System.
- Permanent bonding of Pedestals upto 600 mm height.
- High Tack product, roller applied. Easy replacement of Floor Covering.



AREAS OF USE

- Rooms with mechanical services and cables, wiring, and electrical supply.
- Modern Offices, Data centers and Computer Rooms.

2

Pedestal Adhesive



Fevicol Pedestal Glue

1K Moisture Curing adhesive

Pack Size: 475 g

5

Flooring Adhesive



Fevicol Floorfix Super Tac

Solvent Free, Water Base, Acrylic Tackifier (Pressure Sensitive Adhesive)

Pack Size: 15 kg

RESILIENT FLOORING

Rubber, Sports, Gymnasium Flooring

System for installing
Rubber Flooring
Sheets/ Rolls on Floor



ADVANTAGE

- High Load bearing system, No shrinkage, Low Wear and Tear, Solvent Free.
- Durable, Smooth Finish, High Coverage and High Strength SLC and Screed.
- Complete Primer system enabling application across substrates and conditions.



AREAS OF USE

Gymnasiums, Indoor
Play areas, Garages,
Dance Floors, Shower
Areas.

2

Screed



FS 30

10-50 mm thickness
Compressive Strength
 $\leq 30 \text{ N/mm}^2$

FS 20

10-50 mm thickness
Compressive Strength
 $\leq 20 \text{ N/mm}^2$

Pack Size: 50 kg

3

Primers



Floorfix D53

For absorbent and
dense substrates

Pack Size: 10 kg



Floorfix D63

For non absorbent
subfloors

Pack Size: 10 kg



Floorfix VEP93 **

2K Epoxy primer, Vapour
barrier for surfaces with
3.5% - 6.9% moisture

Pack Size: 10 kg

4

Self leveling Compound



Floorfix SL 24

1 to 10 mm thickness
Compressive Strength
 $> 24 \text{ N/mm}^2$

Pack Size: 25 kg

5

Flooring Adhesive



STAUF R105 Rubber Flooring Specialist

2K PU adhesive for
floor coverings

Pack Size: 15 kg

Artificial Grass Flooring

FIFA certified System for installing Synthetic Turf/ Artificial Grass Rolls on Floor or Grounds



2

Seam Tape



Stauf C145 or C140

Complies with the requirements of the international football standard (FIFA)

Pack Size:

- C140 Tape: 30cm or 20 cm width
- C145 Tape: 30 cm width

3

Turf Adhesive



Stauf R202

2K PU adhesive for Synthetic Turf

Pack Size: 17.1 kg



ADVANTAGE


- Economical system that complies to International Standards.
- Durable, Solvent and Water Free system.




AREAS OF USE

Synthetic Turf indoor and outdoor for Use in Football, Cricket and other sports areas; Terrace and Lawns for Landscaping.

Resin Flooring




Anti Skid Finish
Smooth Finish
Epoxy Self Levelling

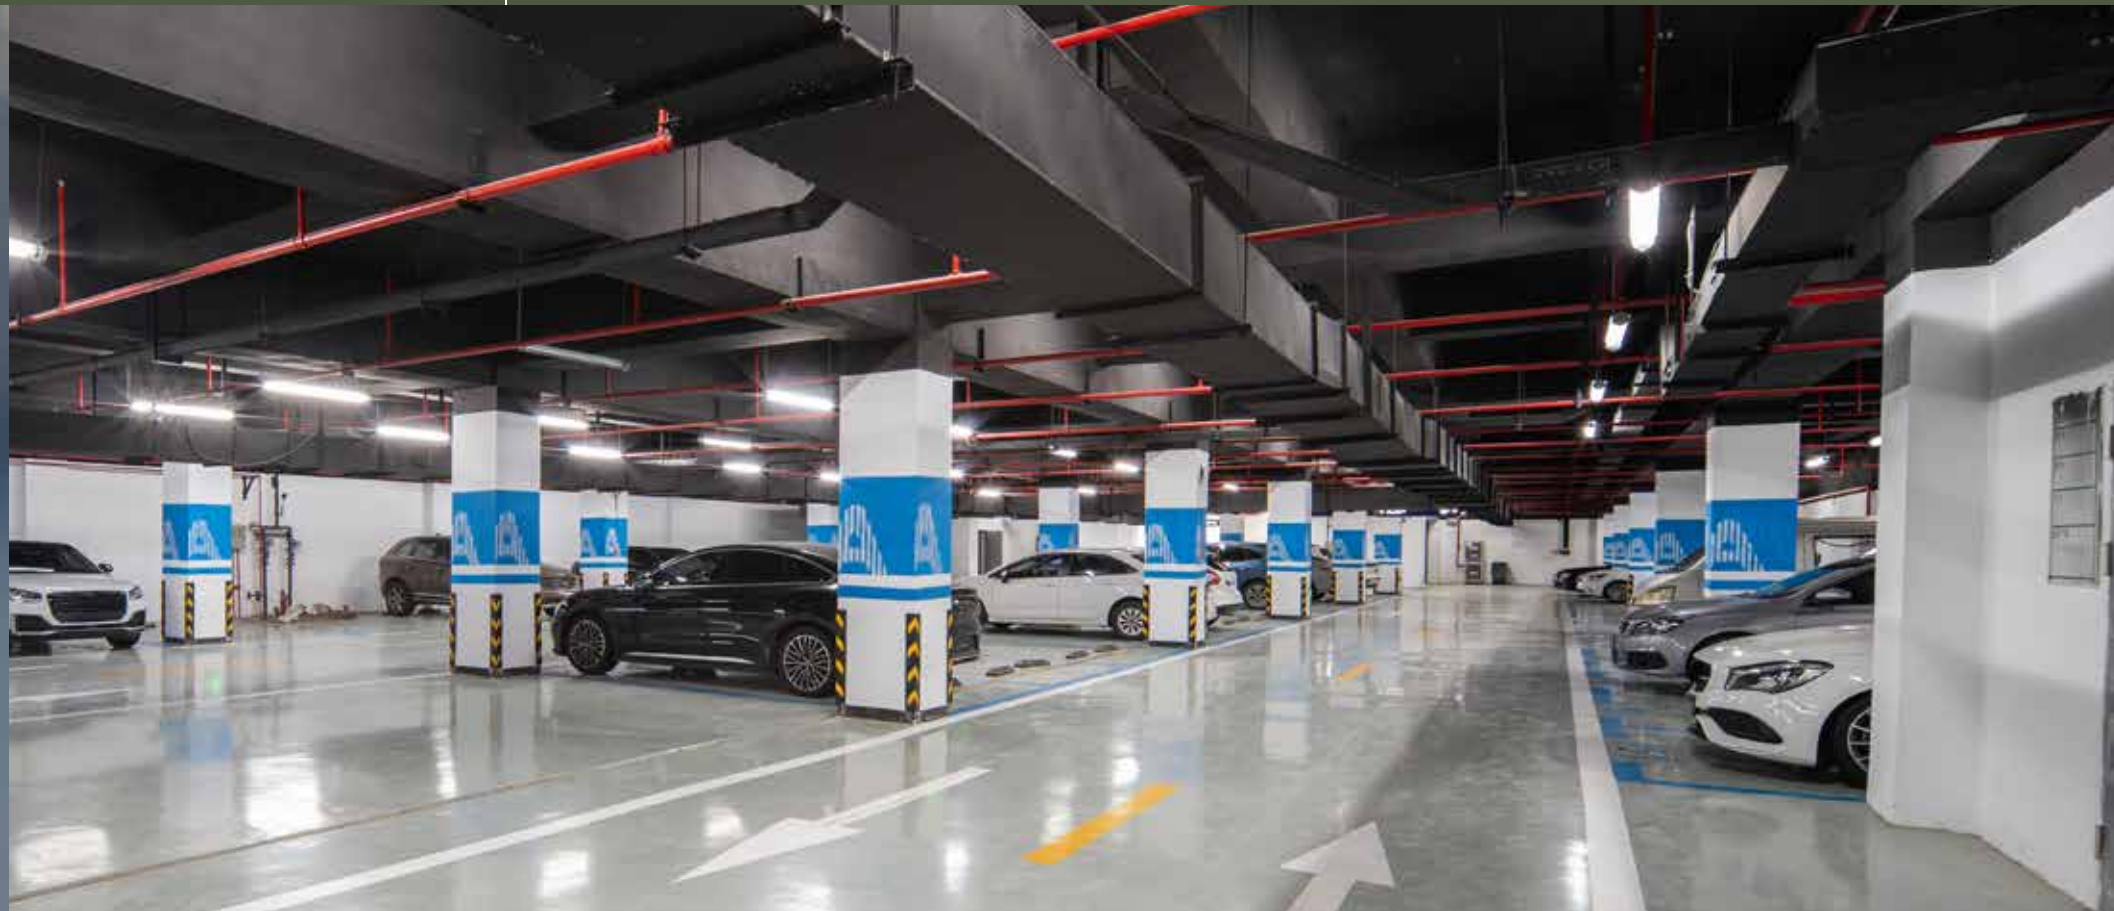

Anti Skid Finish

System for Epoxy Flooring
that is UV stable and
Anti Skid Finish

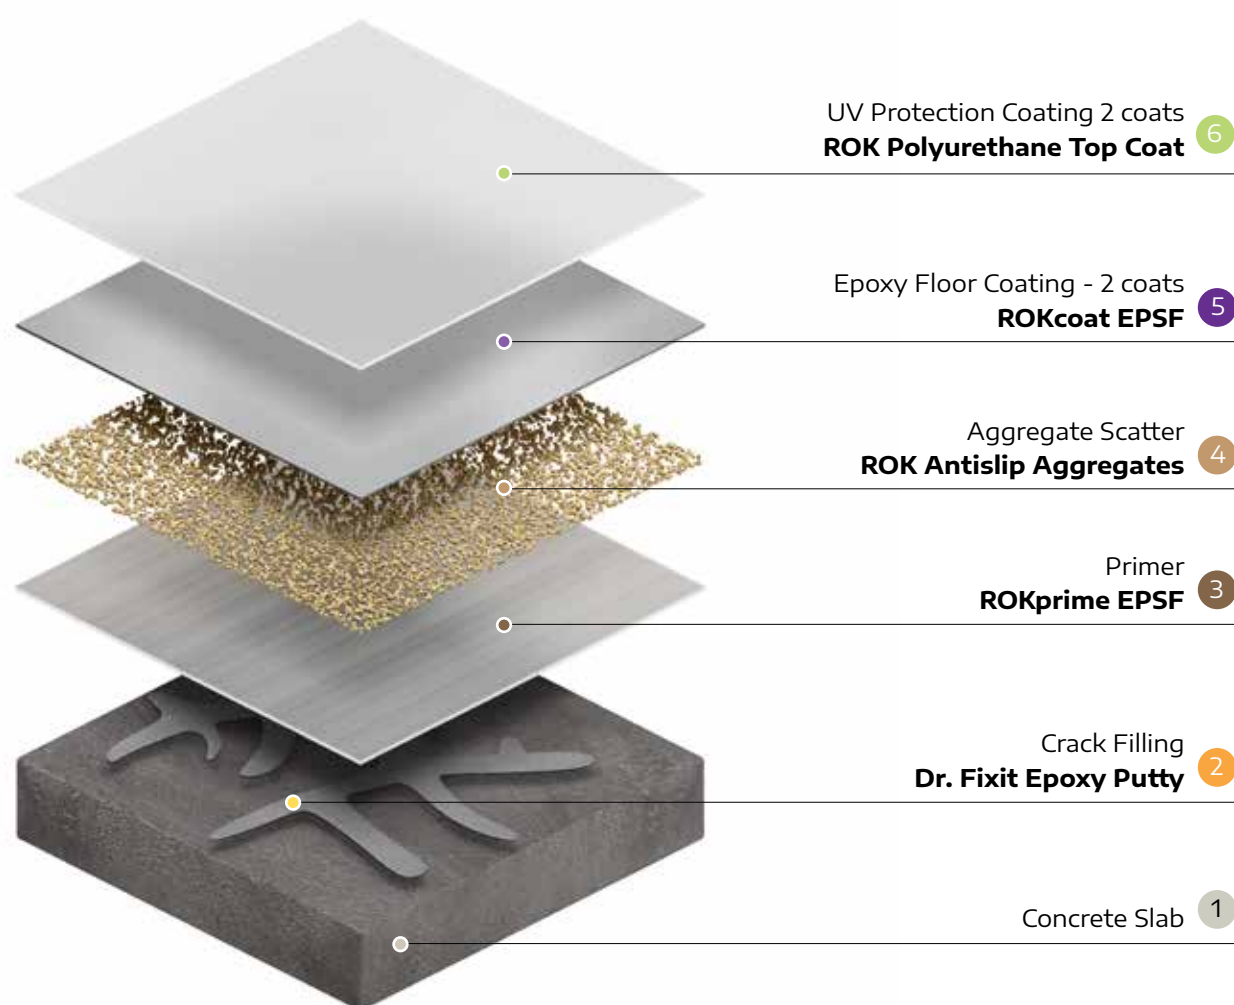

ADVANTAGE

- Anti Skid Finish and UV resistant system.
- Highly resistant to wear and tear due to traffic movement.
- Prevent ingress of water and chemicals into structure and thereby corrosion.



AREAS OF USE

External Car Park, Open Sided Car park,
High Traffic Coatings.

2

Crack Filling



Dr. Fixit Epoxy Putty

Multipurpose 2 part,
when mixed cures to form
a high strength, water and
chemical resistant putty

Pack Size: 3 kg and 8 kg (1:1 ratio)

3

Epoxy Primer



ROKprime EPSF

Solvent Free
Epoxy Primer

Pack Size: 20 ltr

4

Aggregate



ROK Antislip Aggregates

Graded Silica Sand
Grade 1 - 0.1 to 0.3 mm;
Grade 2 - 0.4 to 0.8 mm;
Grade 3 - 0.6 to 1.2 mm

Pack Size: 25 kg

5

Epoxy Floor Coating



ROKcoat EPSF

2 component, Solvent
Free, Pigmented, High
Build coating (200-250
micron/ coat)

Pack Size: 15 ltr

6

UV Coating




ROK Polyurethane Top Coat

2 component, UV Stable,
Solvent Based coating
with DFT of 100 micron/
coat. Available in
Pigmented/ Clear or Matt
Finish.

Pack Size: 20 ltr

Smooth Finish

System for Epoxy Flooring that is solvent free, resistant to wear and tear with smooth finish

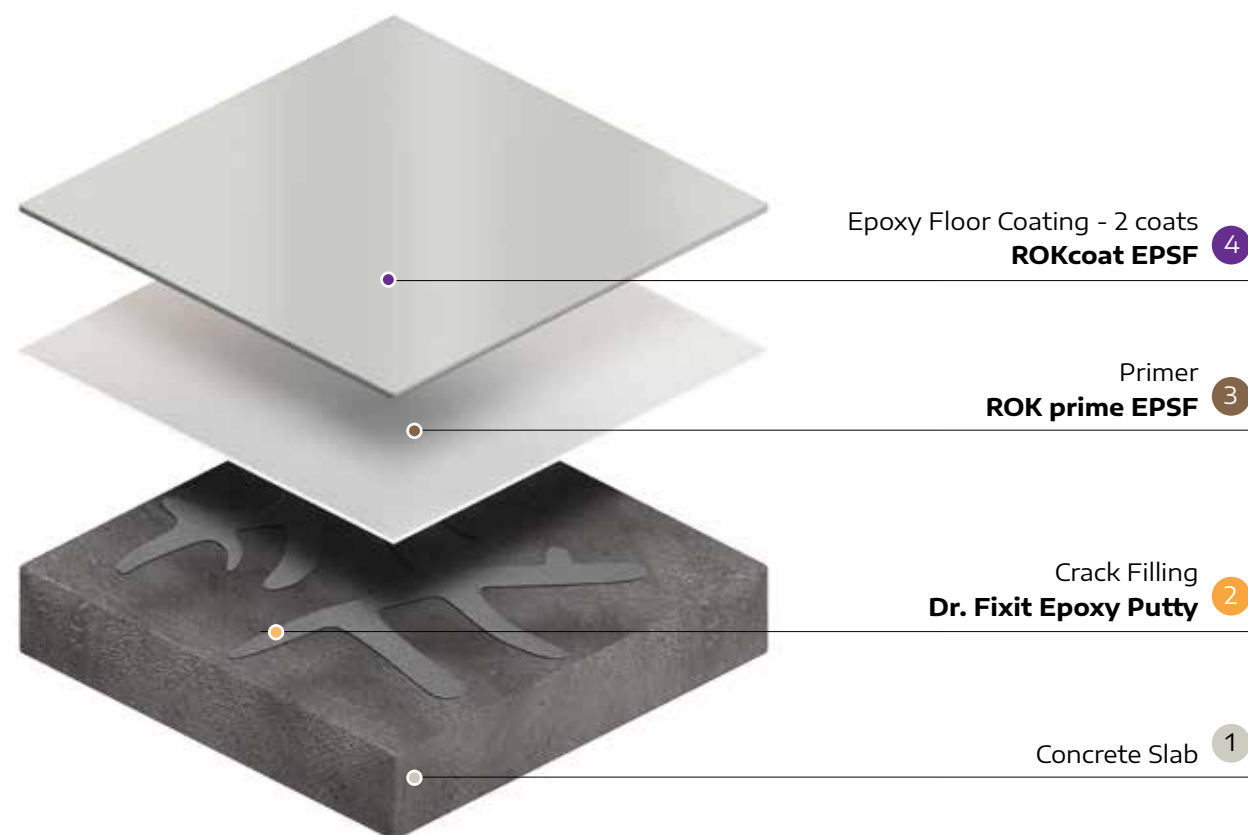

2

Crack Filling



Dr. Fixit Epoxy Putty

Multipurpose 2 part, when mixed cures to form a high strength, water and chemical resistant putty

Pack Size: 3 kg and 8 kg (1:1 ratio)

3

Epoxy Primer



ROKprime EPSF

Solvent Free Epoxy Primer

Pack Size: 20 ltr

4

Epoxy Floor Coating



ROKcoat EPSF

2 component, Solvent Free, Pigmented, High Build coating (200-250 micron/ coat)

Pack Size: 15 ltr



ADVANTAGE

- Solvent free, smooth finish system.
- Highly resistant to wear and tear due to traffic movement.
- Prevent ingress of water and chemicals into structure and thereby corrosion.




AREAS OF USE

Internal car parks, Shop floor, Hospital Floor, Machine Rooms, Warehouse Floor, Garages, Food and Beverage facilities.

Epoxy Self Levelling

System for Epoxy
Self Levelling
as Finished surface

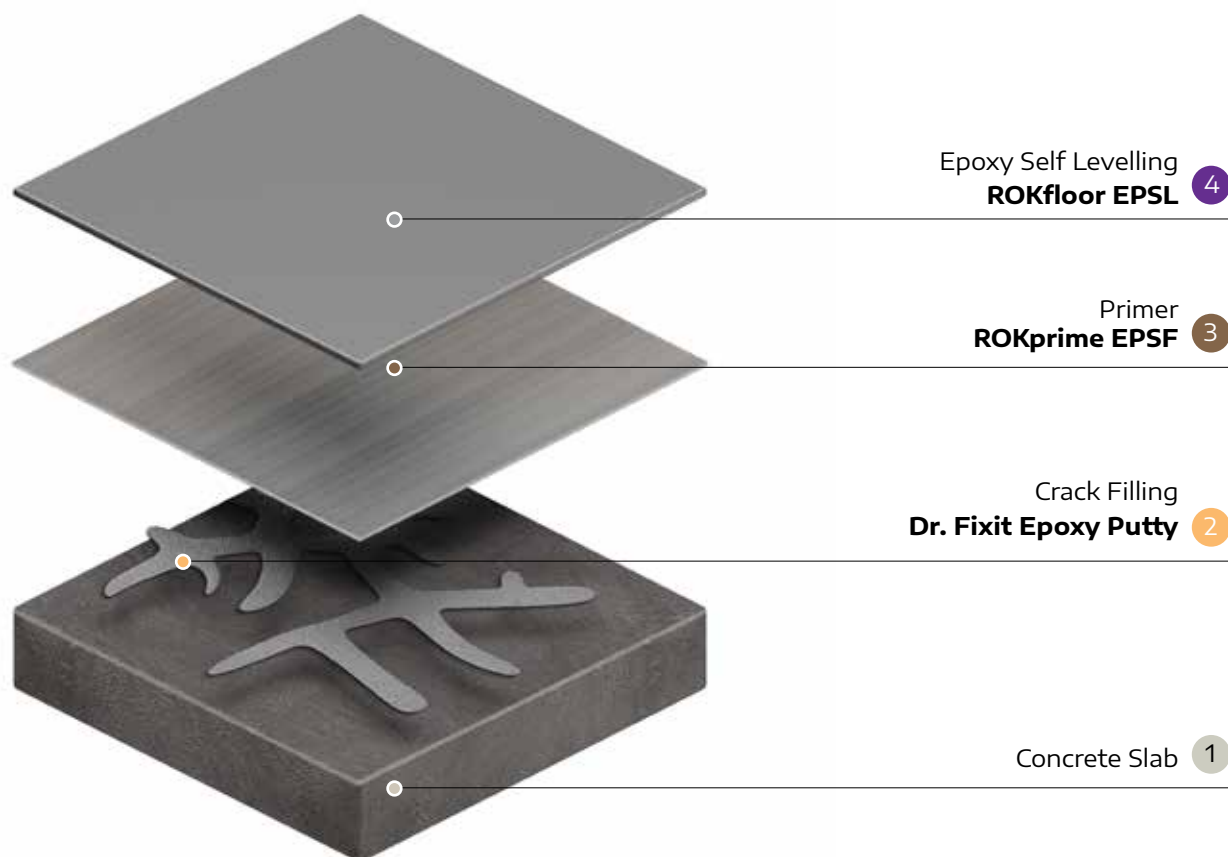

ADVANTAGE

- High Gloss and Seamless finish.
- Self Smoothing during application
- Abrasion Resistant.



AREAS OF USE

Pharmaceutical facilities,
Medical Facilities, Lobbies,
Car Showrooms

2

Crack Filling



Dr. Fixit Epoxy Putty

Multipurpose 2 part,
when mixed cures to form
a high strength, water and
chemical resistant putty

Pack Size: 3 kg and 8 kg (1:1 ratio)

3

Epoxy Primer



ROKprime EPSF

Solvent Free
Epoxy Primer

Pack Size: 20 ltr

4

Epoxy Floor Coating



ROKfloor EPSL

2 component, Solvent
Epoxy Self Levelling Floor
Topping (1-3 MM)
solvent free, pigmented,
providing long term high
wear resistance

Pack Size: 22 ltr

Waterproofing



Swimming Pool

Wet Areas

Bathroom / Kitchens


Internal Wall Dampness



WATERPROOFING

Swimming Pools Cementitious Pools

System for Waterproofing, Tile fixing,
Grouting and finishing for Swimming
Pools/ Water Bodies

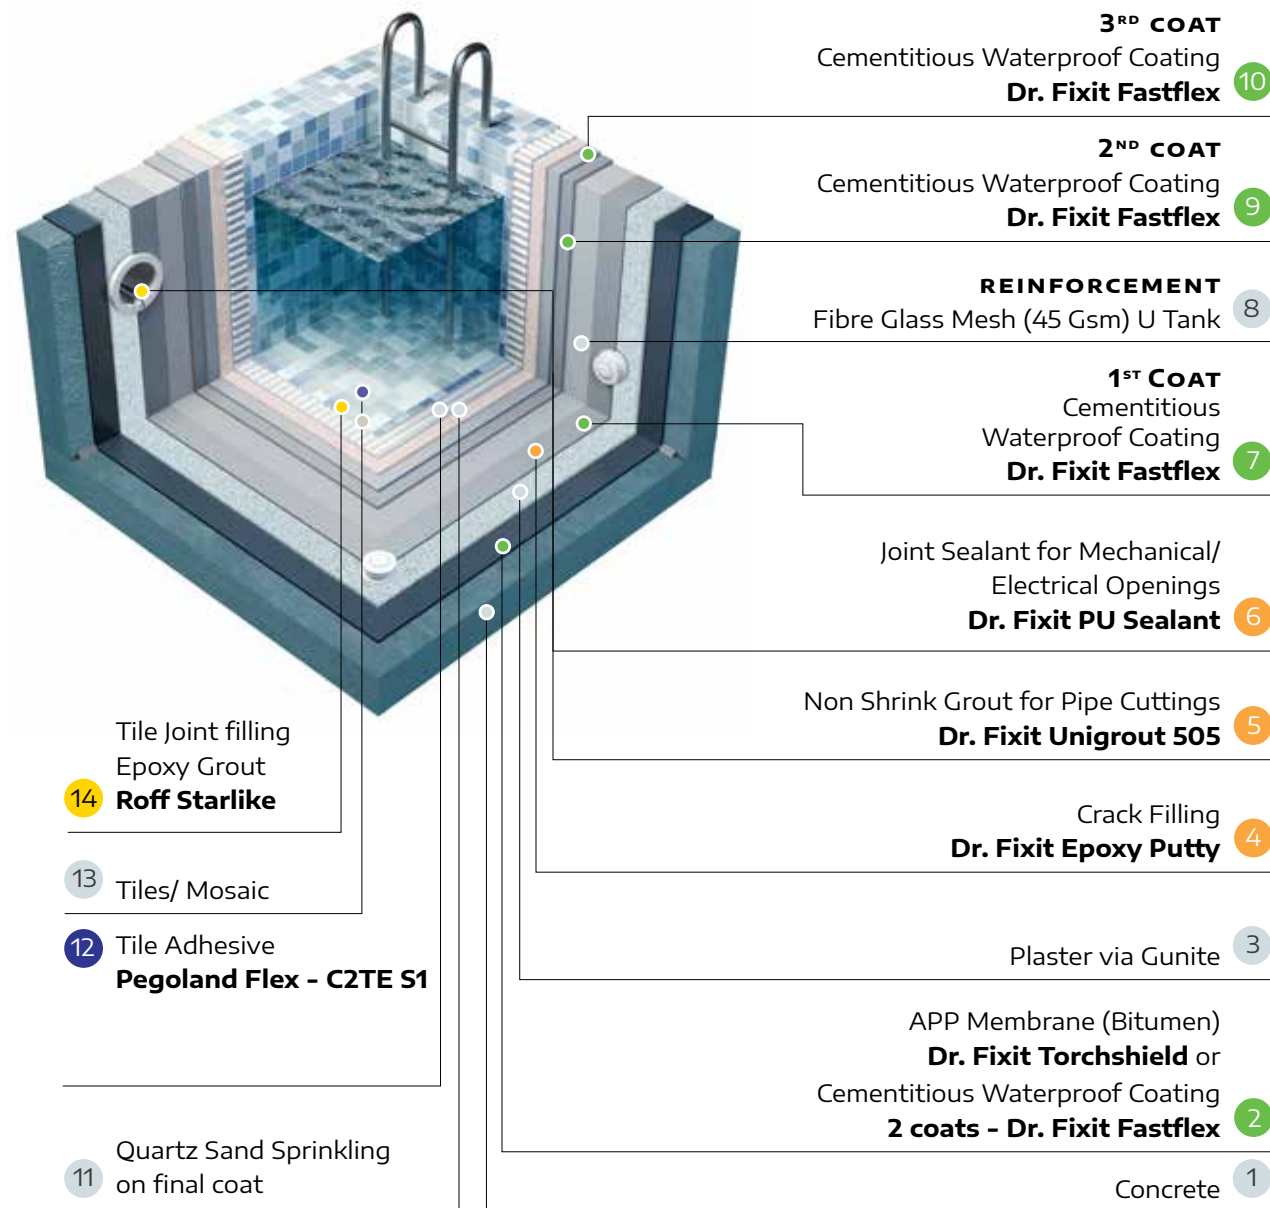

ADVANTAGE

- Best in class swimming pool system.
- Prevents water seepage and withstands continous hydrostatic pressure.
- Durable, Life expectancy of 10 years.



AREAS OF USE

- Swimming pools (cementitious), water bodies like - lagoons.

2 7 9 10

Waterproofing



Dr. Fixit Torchshield
APP modified bitumen
based membranes

Pack Size: 1 mtr x 10 mtr
Thickness: 3mm and 4mm



Dr. Fixit Fastflex
2K Heavy Duty
Cementitious
Waterproof Coating
DFT 2 mm (3 coat)

Pack Size: 24 kg

4 5

Crack Filling

6

Sealant



Dr. Fixit Exopy Putty
Multipurpose 2 part,
when mixed cures to
form a high strength,
water and chemical
resistant putty

Pack Size: 3kg and 8kg



Dr. Fixit PU Sealant
For Mechanical/
Electrical Openings

Pack Size: 600 ml



Dr. Fixit Unigrout 505

Non shrink grout for
pipe cuttings

Pack Size: 25 kg

12

Tiling

14

Tile Grout



**Pegoland
Flex - C2TE S1**
Tile Adhesive - 3-6mm
depending on Tile
Thickness

Pack Size: 25 kg




Roff Starlike RG, R2T
2K high performance
epoxy grout
UV resistant

Pack Size: 5kg

WATERPROOFING

Wet Areas Bathroom Kitchens / Balcony

System For Under Tile Waterproofing in
Bathroom or Wet Areas with Cementitious
Coating followed By Installation Of Tiles

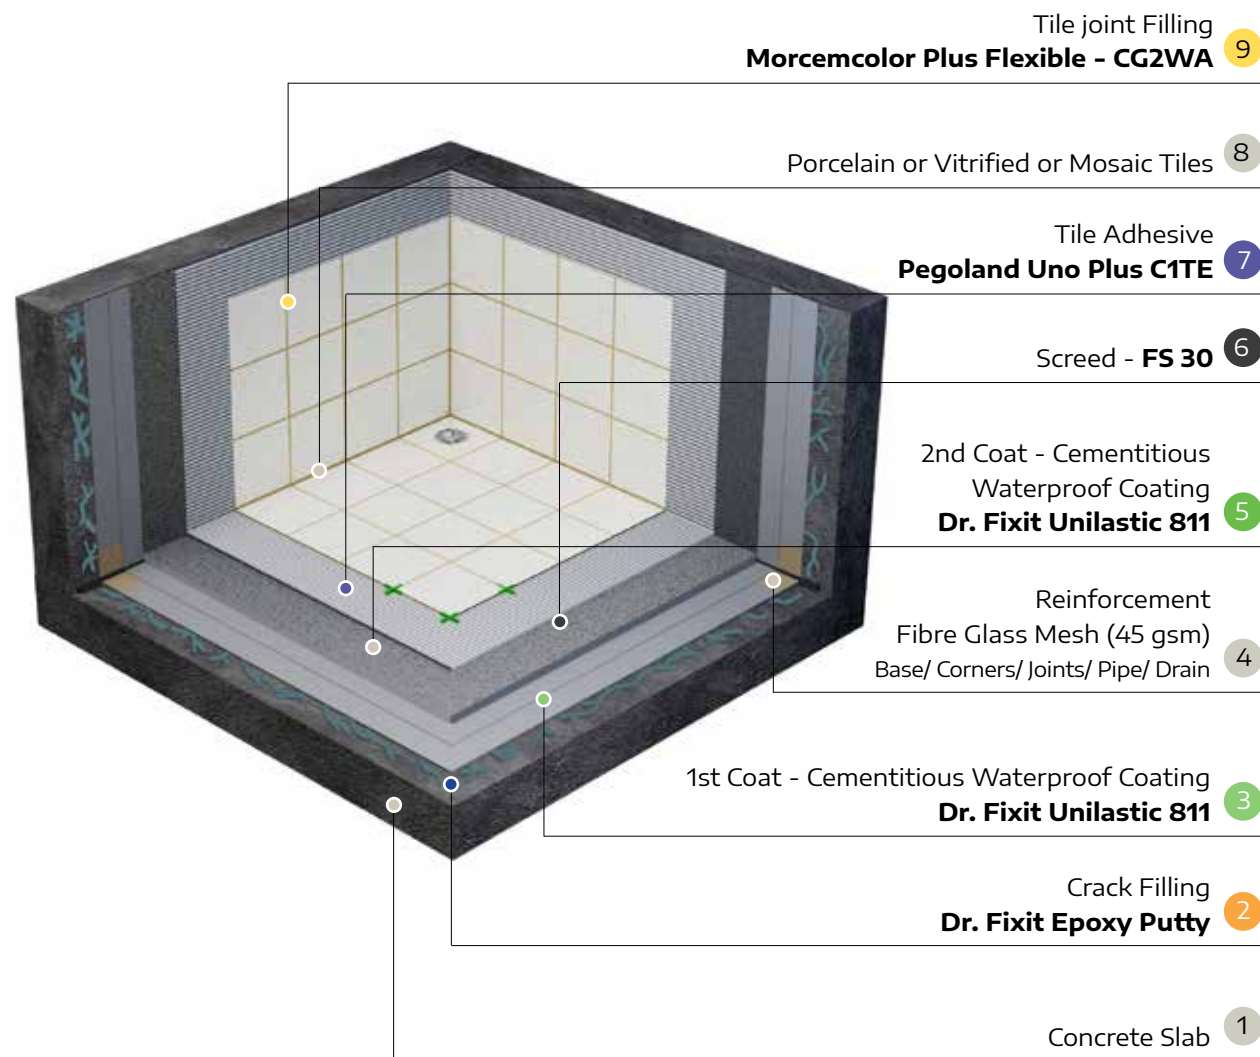

ADVANTAGE

- Leak Free Bathrooms.
- Durable, Economicals and Low Maintenance.
- High Hygiene standards.



AREAS OF USE

- Bathroom, Shower Areas Floor and Wall, Kitchen, Balconies.

2

Crack Filling



Dr. Fixit Exopy Putty

Multipurpose 2 part, when mixed cures to form a high strength, water and chemical resistant putty

Pack Size: 3 kg and 8 kg (1:1 Ratio)

3

5

Waterproofing



Dr. Fixit Unilastic 811

2K flexible waterproof coating 40%+ elongation, 5 bar positive side and 3 bar negative side water pressure resistanceMortar. Reduces Water Permeability.

Pack size: 35 kg

6

Screed



FS 30

10-50 mm thickness
Compressive Strength
≤30 N/mm²

FS 20

10-50 mm thickness
Compressive Strength
≤20 N/mm²

Pack Size: 50 kg

7

Tiling



9

Tile Grout



Pegoland Uno Plus C1TE

Bathroom, Wet Areas
Tile Fixing Specialist

Pack size: 25 kg



Morcemcolor Plus Flexible - CG2WA


Cementitious grout with Aquastop effect and Bioactive technology. Available in 26 shades.

Pack size: 5 kg

WATERPROOFING

Internal Wall Dampness

System For repairing
Internal Wall Dampness

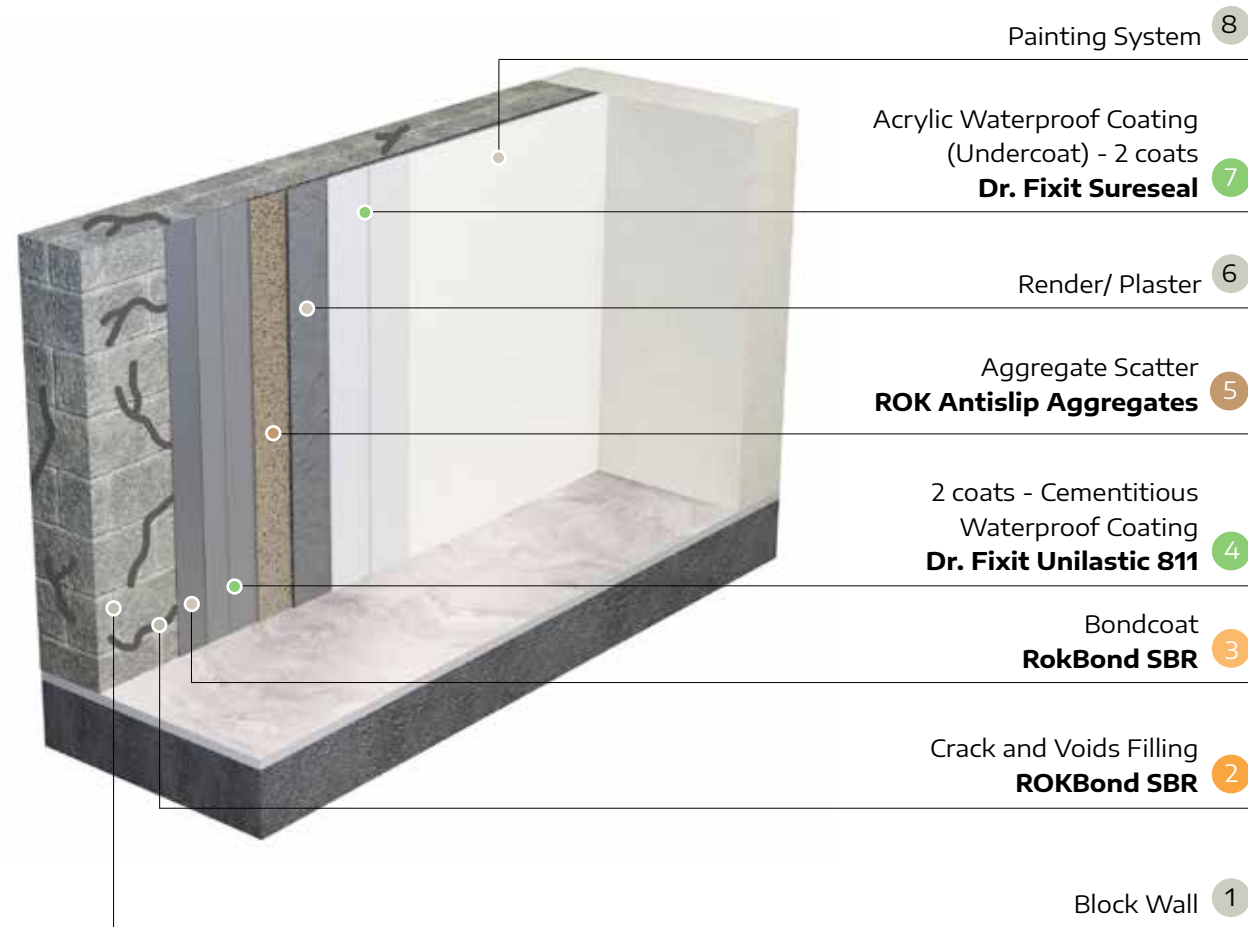

2 3

Surface Preparation



Rokbond SBR

Latex Polymer to make High Strength Polymer Modified Mortar. Reduces Water Permeability. Use as Bonding Primer Coat

Pack size: 20 kg

4 7

Waterproofing



Dr. Fixit Unilastic 811

2K flexible waterproof coating 40%+ elongation, 5 bar positive side and 3 bar negative side water pressure resistance. Reduces Water Permeability.

Pack size: 35 kg



Dr. Fixit Sureseal

Single component waterproof coating 40%+ elongation, breathable 3 bar negative side water pressure resistance 150-170 micron DFT in 2 coats

Pack size: 5 kg & 20 kg

5

Aggregate



ROK Antislip Aggregates

Graded Silica Sand
Grade 1 - 0.1 to 0.3 mm;
Grade 2 - 0.4 to 0.8 mm

Pack size: 25 kg



ADVANTAGE

- Complete Repair system with twin barriers for peace of mind.
- Excellent chemical and negative side water resistance.



AREAS OF USE

- High chemical aggression areas like Motor rooms/ Basements/ Walls affected with Efflorescence, Rising water dampness prone.