
Play to win

## Flooring guide




effors
The Flooring Solutions




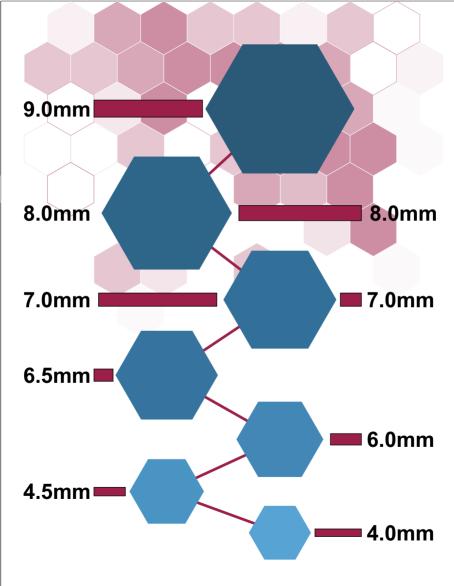

Ä	<b>Total Thickness</b> EN 428	4.0mm	4.5mm	6.0mm	6.5mm	7.0mm	8.0mm	9.0mm
$\stackrel{\times}{\Rightarrow}$	<b>Wear Layer Thickness</b> EN 429	0.45mm	0.6mm	0.6mm	0.6mm	0.8mm	0.8mm	0.8mm
	Roll Width EN 426	1.8m	1.8m	1.8m	1.8m	1.8m	1.8m	1.8m
	Roll Length EN 427	15m	15m	15m	15m	15m	15m	15m
	Abrasion Resistance EN ISO 5470-1	≤350mg	≤350mg	≤350mg	≤350mg	≤350mg	≤350mg	≤350mg
Bri-S1	Fire Rating EN 13501	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
	Impact Resistance EN 1517	≥8N/m	≥8N/m	≥8N/m	≥8N/m	≥8N/m	≥8N/m	≥8N/m
	Residual Indentation EN 433	≤0.6mm	≤0.5mm	≤0.5mm	≤0.5mm	≤0.5mm	≤0.5mm	≤0.5mm
	Sound Reduciton EN ISO 717-2	20~30dB	20~30dB	20~30dB	20~30dB	20~30dB	20~30dB	20~30dB
	Friction Coefficient DIN 18032	0.45~0.65	0.45~0.65	0.45~0.65	0.45~0.65	0.45~0.65	0.45~0.65	0.45~0.65
	Ball Bounce EN 12235	≥90%	≥90%	≥90%	≥90%	≥90%	≥90%	≥90%
	Sliding Coefficient EN 13036-4	80~110	80~110	80~110	80~110	80~110	80~110	80~110
	Vertical Deformation EN 14309	≤2mm	≤2mm	≤2mm	≤2mm	≤2mm	≤2mm	≤2mm
	Shock Absorption EN 14308	≥20%	≥25%	≥25%	≥25%	≥25%	≥35%	≥35%
			1	а	Anti–scratch pure PVC wear layer			
			(a)	b	b High-density white color st layer			



- Fiber-glass layer
- Low foaming rate buffer layer
- Hexagon designed backing layer



## ABOUT SPORTS FLOORING

## 25 colors

Available thickness include 4.0mm, 4.5mm, 6.0mm, 6.5mm, 7.0mm, 8.0mm, 9.0mm

Available wear laver thickness include 0.45mm. 0.6mm, 0.8mm and 1.0mm

Low foaming rate make the flooring with best shock absorption, which is higher than other brands based on same thickness. Brilliant vibration absorption to reduce sports injuries

Both Professional type and Multi-purpose type available, suitable in different and wide sports applications

The damp proof hexagon design of backing with strong grip force prevent the flooring moving in daily use. Suitable for removable courts.

## FLEXISPORTS Flooring guide

SPORTS INDOOR is registered in Canada. and managed by European technicians. We specializing in the production of vinyl flooring materials include homogeneous flooring, heterogeneous flooring. ESD flooring. sports flooring and different type of vinvl tiles, They have been widely used in areas such as Transport, Education, Healthcare, Commercial Buildings, Offices, Residences, Sports and other areas.

Products of high quality and fashionable, widely used in a variety of architecture, not only has the broad masses of the domestic market, but also been distributed to over 30 countries

Our advanced machineries were imported from German and Japan. At the same time, over 500 legal staffs insist on providing dedicated international standard support with assistance on logistics, dedicated packaging and quality control for global customers. Till now, our monthly capacity can achieve 6,000,000 square meters.



Œ

SGS