

FRESH
FRESH
FRESH



INNOVATIVE FLOORING





Tangerine

MSR012



Pomegranate

MSR013



Turquoise

MSR014



Titanium MSR020



Pomegranate MSR013



Ocean

MSR015



Lime

MSR016



Pecan

MSR017




Seashell

MSR018



Graphite


MSR019

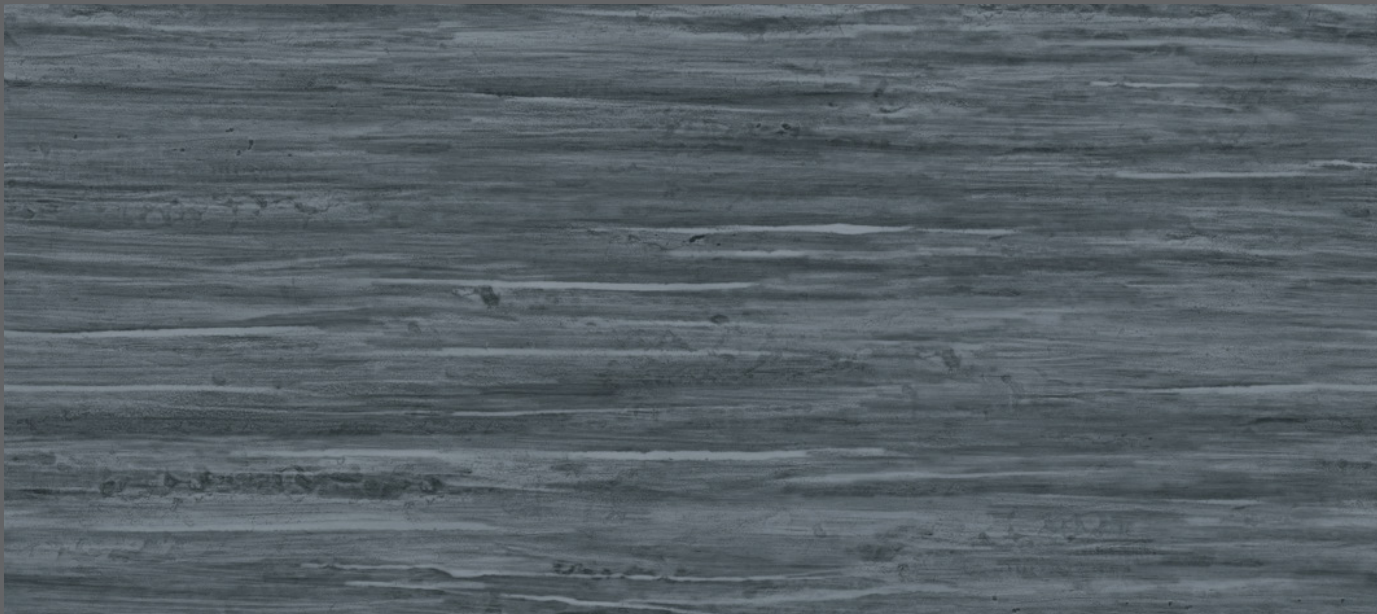

Titanium

MSR020

PRODUCT STRUCTURE

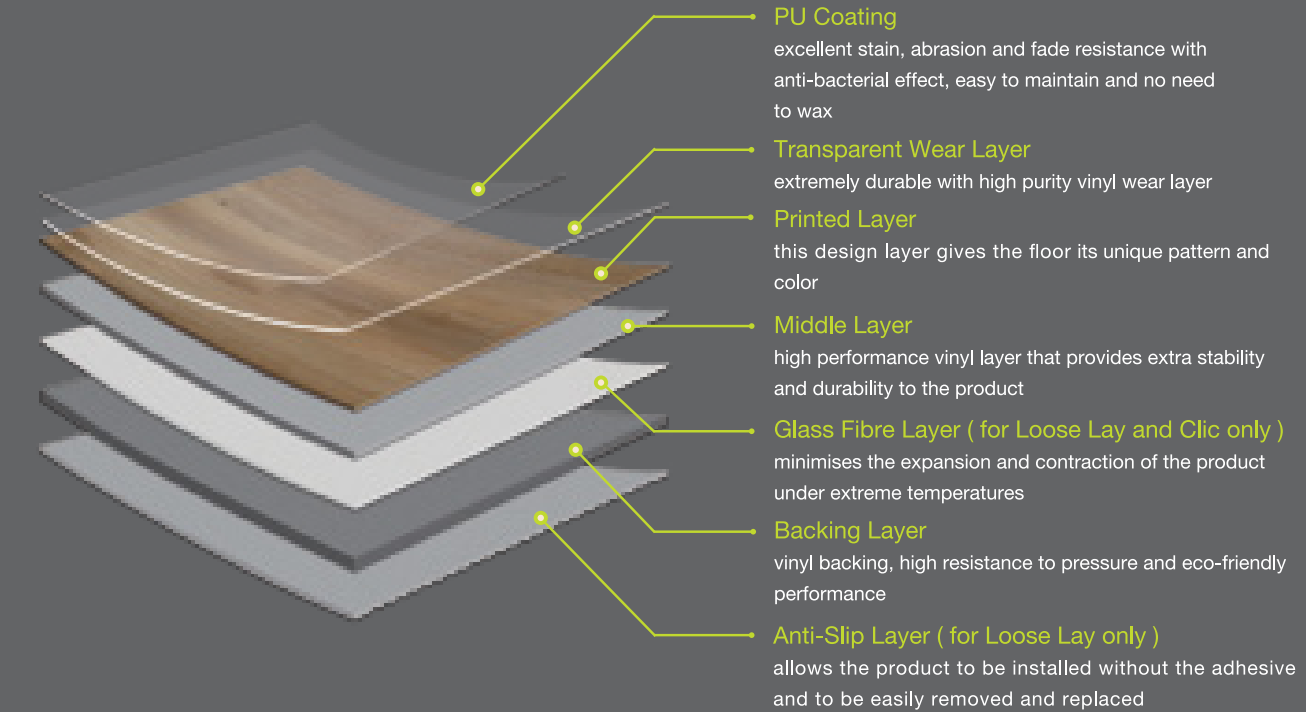

CHARACTERISTICS	TEST METHOD	
Luxury Vinyl Tile	EN 649	Heterogeneous PVC
Lacquering PU		Particle PU Lacquer
Weight	EN 430	ca.4315 g/m ²
Thickness	EN 428	2.5 mm
Wear layer	EN 429	0.5 mm
Classification	EN 685	33,42
Fire Classification	EN 13501	Bfl-S1
Slip Resistance	DIN 51130 EN 13893	R9 DS
Weargroup	EN 649	T
Residual Indentation	EN 433	<0.1 mm
Thermal Conductivity	DIN 52612	0.02 m ² k/w
Electrical Conductivity	EN 1081	app 10 ¹¹ Ohm
Castor Chair	EN 425	Yes, Type W
Floor Heating		Yes, max.27°
Colourfastness	ISO 105-B02	m>6 Grade
Tile Size		30.5 x 61 cm (12" x 24")





INNOVATIVE FLOORING