

The Original
MIPOLAM 1937

MIPOLAM® ATLAS®



easyCare™



Gerflor®
theflooringgroup

MIPOLAM® ATLAS®


easyCare™




EASYCARE™

34-43


100 % recyclable

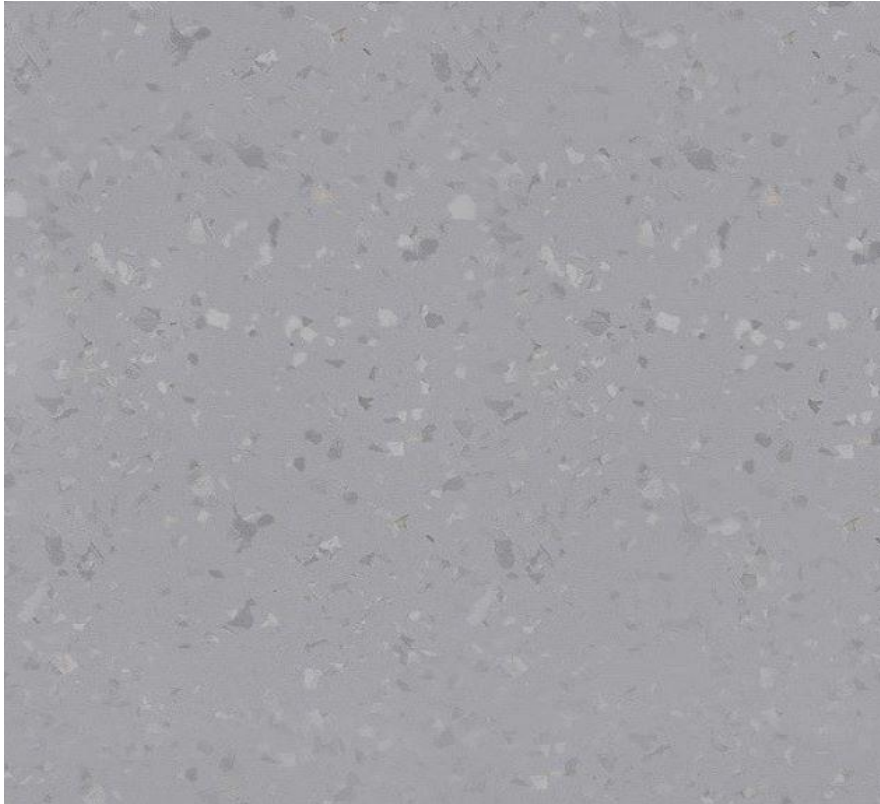


0156 Stone Grey

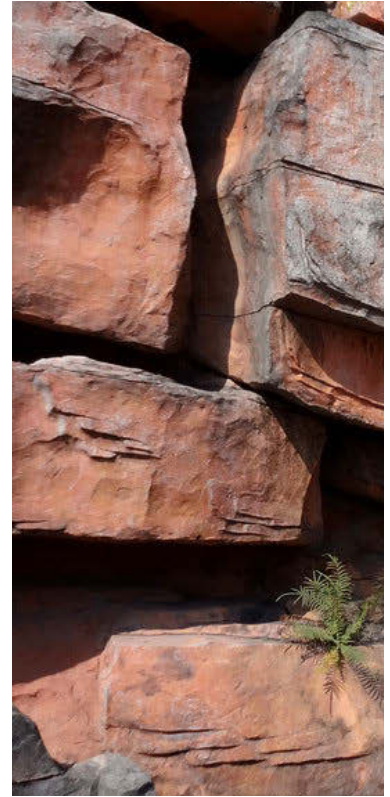

0157 Cool Gray

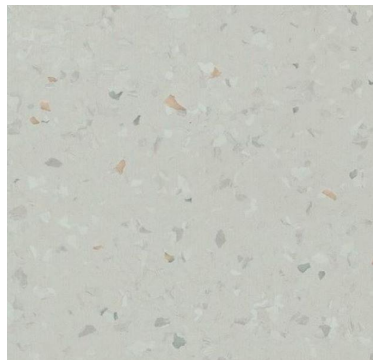

6001 Argilla

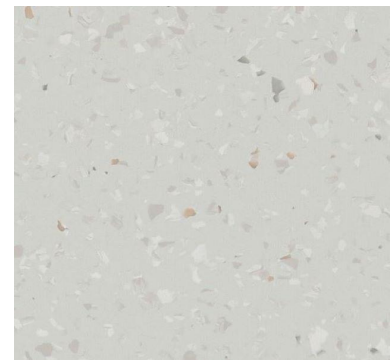

6004 Creamy White



Compact sheet, without foam backing

MIPOLAM® ATLAS® **easyCare™**

MIPOLAM® ATLAS® is a flexible homogeneous pressed compacted floorcovering in sheet, with non-directional design color dyed as a raw mixture to ensure color throughout the thickness. Its surface is densely compacted for improved wear and ease of maintenance. It benefits from EASYCARE™ surface treatment with good resistance to chemicals and to scuffing, and high resistance to scratches and staining. Easy to clean. No wax for life!

MIPOLAM® ATLAS® features bacteriostatic and fungistatic treatments. The flooring complies with the EN 649 (34-43) and has a Group T wear rating. It is suitable for heavy traffic areas.

MIPOLAM® ATLAS®

DESCRIPTION

| | | | |
|-------------------------|--------------------|------------------|----------|
| Total thickness | ISO 24346 (EN 428) | mm | 2 |
| Weight | ISO 23997 (EN 430) | g/m ² | 2995 |
| Width / Length of sheet | ISO 24341 (EN 426) | cm / lm | 200 / 20 |

CLASSIFICATION

| | | | |
|------------------------------|--------------------|-------|------------------------------------|
| Norm / Product specification | - | - | ISO 10581(EN 649) |
| European classification | ISO 10874 (EN 685) | class | 34 - 43 |
| Fire rating | EN 13 501-1 | class | Bfl-s1 |
| Static electrical propensity | EN 1815 | KV | <2 |
| Electrical resistance | EN 1081 | Ω | 10 ⁹ - 10 ¹⁰ |
| Slip resistance dry | EN 13893 | - | ≥0.3 |
| Slip resistance wet | DIN 51130 | class | R9 |

PERFORMANCES

| | | | |
|---|----------------------|-----------------|-----------|
| Wear resistance | EN 660.2 | mm ³ | ≤2.0 |
| Wear group | EN 649 | group | T |
| Type binder content | ISO 10581 | type | I |
| Dimensional stability | ISO 23999 (EN 434) | % | ≤ 0.4 |
| Residual indentation | ISO 24343-1 (EN 433) | mm | ≈0.04 |
| Castor chair test | ISO 4918 (EN 425) | - | OK |
| Thermal conductivity | ISO 10456 (EN 12524) | W/(m.K) | ≈0.25 |
| Colour fastness | ISO 105 - B02 | degree | ≥ 6 |
| Chemical products resistance | ISO 26987 (EN 423) | - | OK |
| Anti-bacterial and fungicidal treatment | - | - | OK |
| Surface treatment | - | - | EASYCARE™ |
| Color number | - | - | 16 |

ENVIRONMENT / INDOOR AIR QUALITY

| | | | |
|--------------------|---------------|-------------------|-------------|
| TVOC after 28 days | ISO 16000 - 6 | µg/m ³ | < 10 |
| Certification | - | - | Floorscore® |

CE MARKING

| | | | |
|----|----------|---|---|
| CE | EN 14041 | - |  |
| | | |  |

Gerflor Don't forget our complementary ranges!



Handrails



Wall Coverings
& Protections



Entrance mats



Skirtings
& Profiles

MIPOLAM® ATLAS®, LESS SPEAKING FOR MORE ACTIONS



COMPOSITION
100% REACH compliant
FREE of formaldehyde
FREE of heavy metals
FREE of solvent



RECYCLED CONTENT
100% REACH compliant
recycled content



RECYCLABILITY
100% recyclable
product



INDOOR AIR QUALITY
TVOC emissions between
10 and 100 times better than
norms requirements
Floorscore certified
No formaldehyde emission



WELLNESS
Health: Antibacterial activity
(inhibits growth > 99%)

