



TARALAY IMPRESSION
COMFORT

gerflor.fr

Taralay Impression





0522 - Habana Trinidad

Design	: Wood
Product format	: Rolls
Sizes	: 25 ml x 2 m
Thickness :	
Compact	: 2 mm
Comfort	: 3.35
NCS	: 5010-Y30R
LRV	: 25,6

- Extreme Stain Resistance, Easy Maintenance
- High Traffic Resistance, Long-lasting Appearance
- The Best Acoustic / Indentation Performance on the Market
- Ultra-realistic Designs
- Matt Effect

Made in France

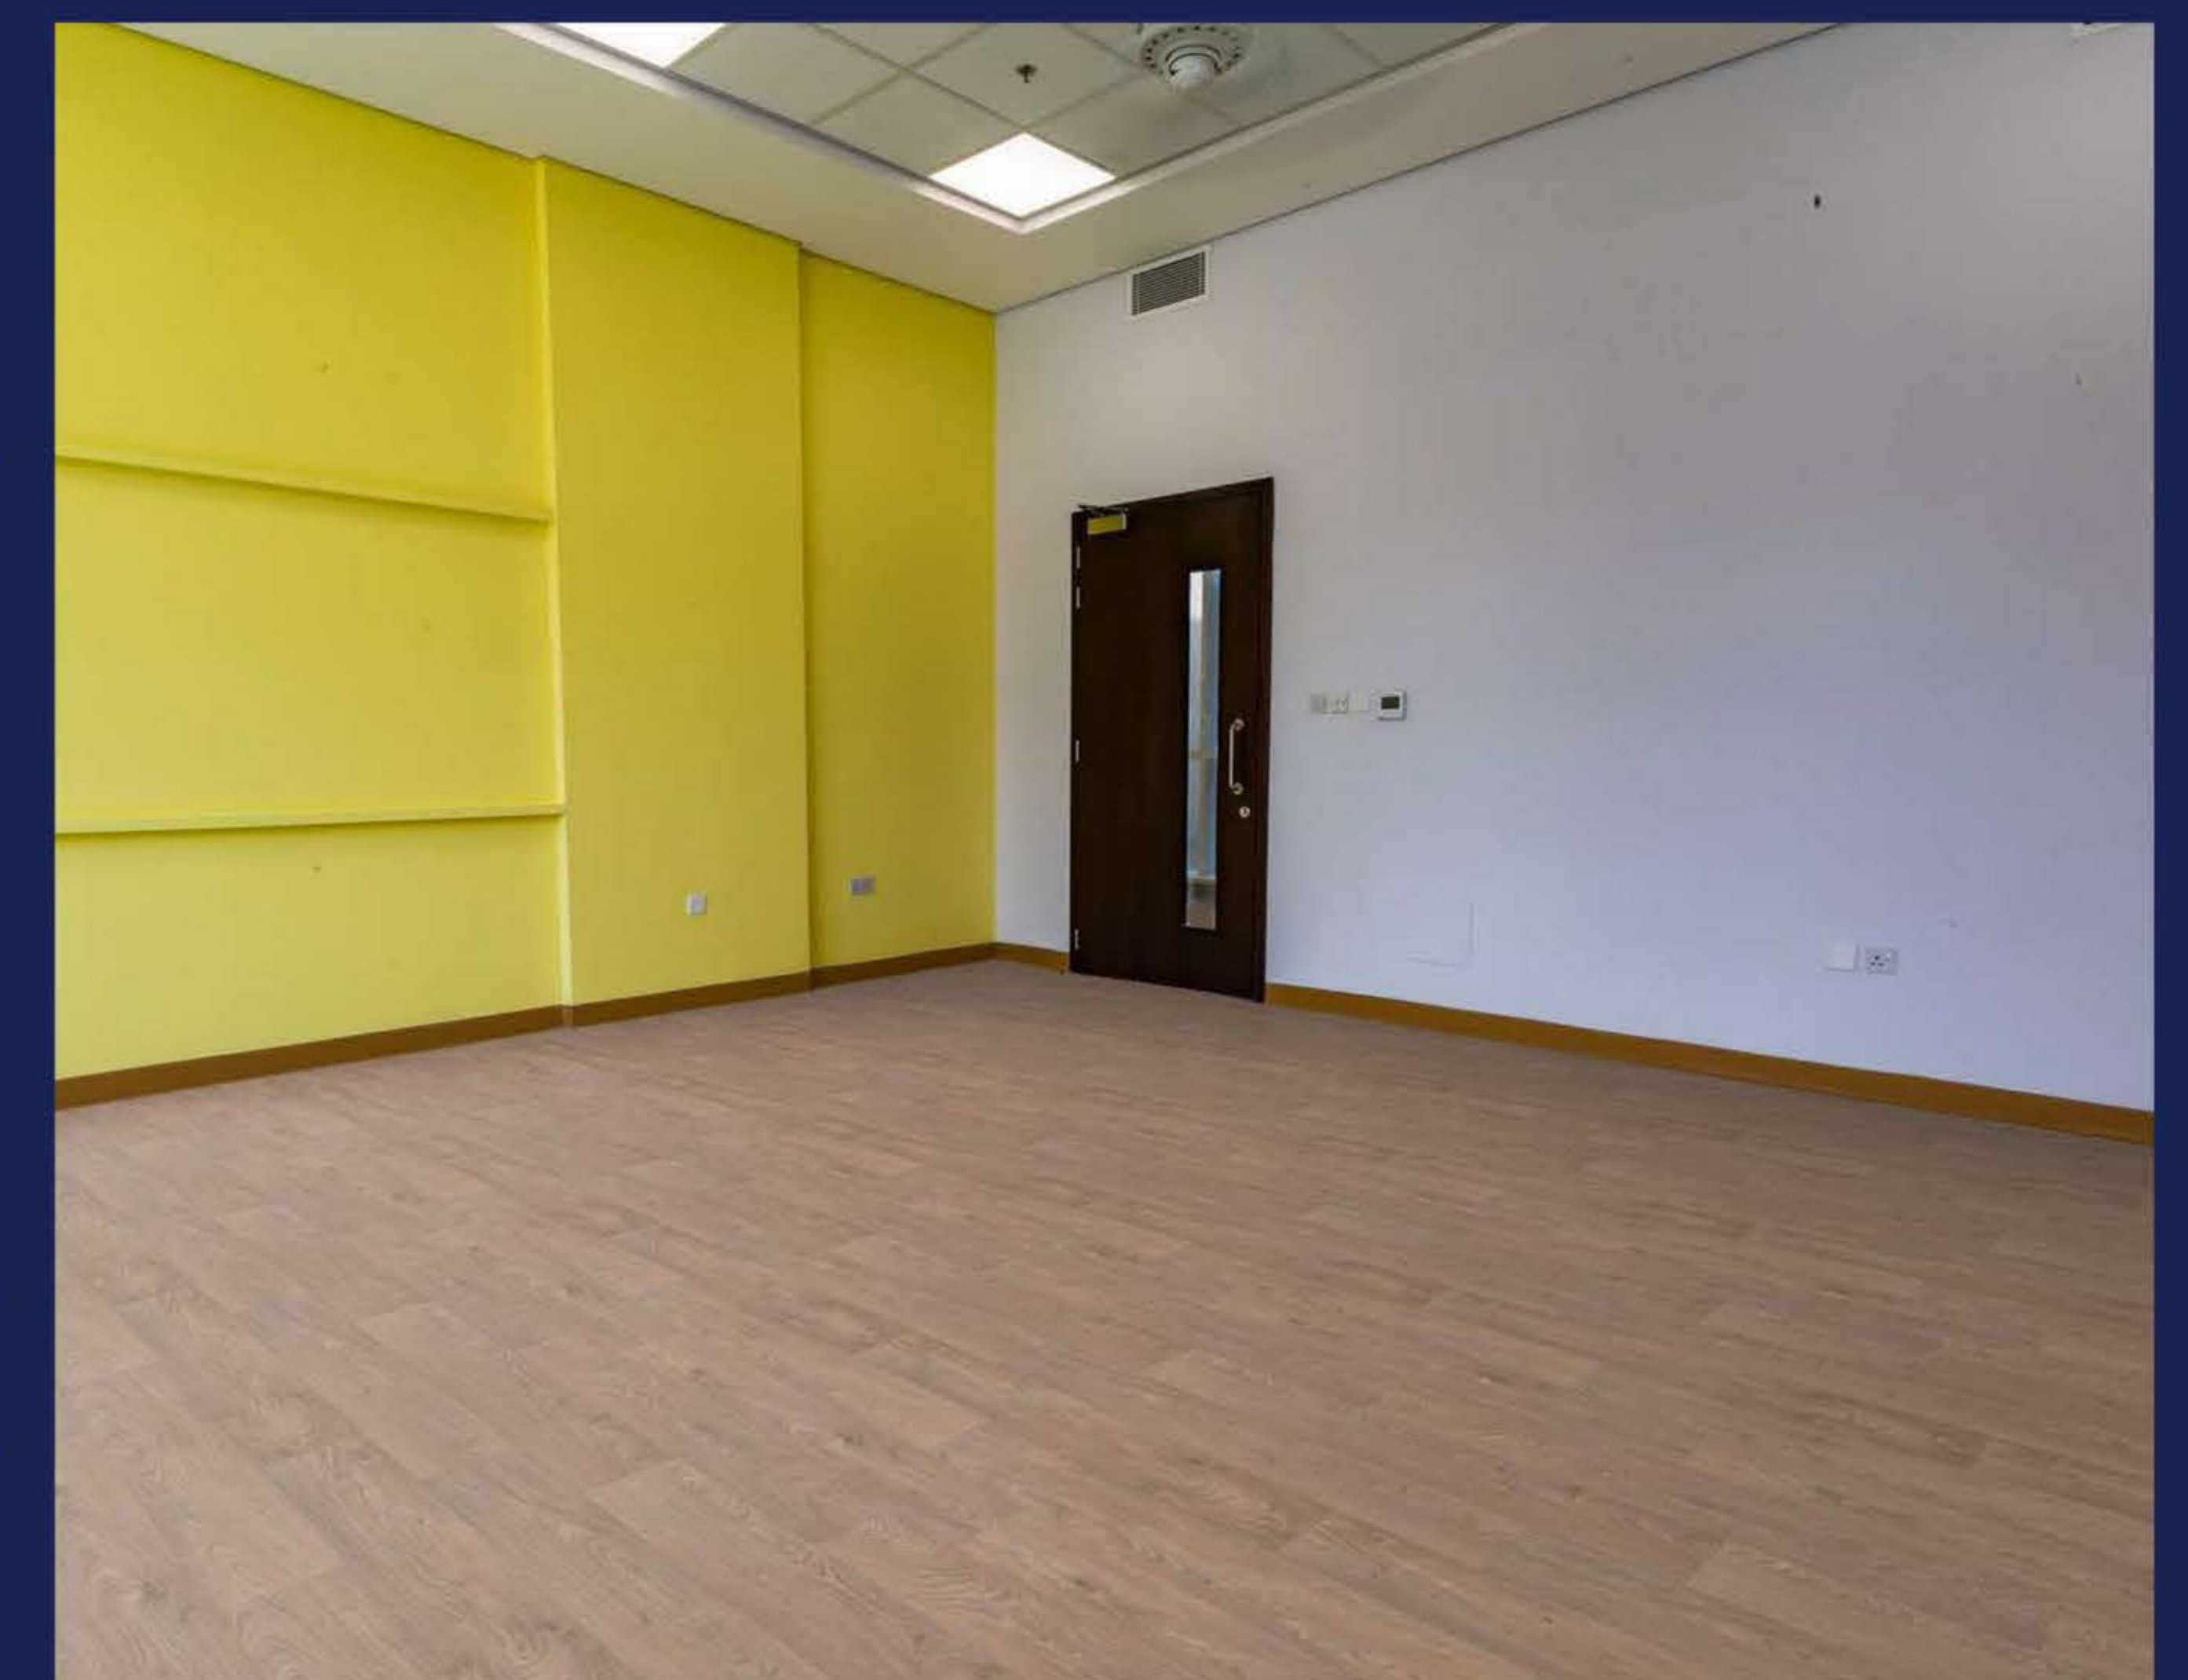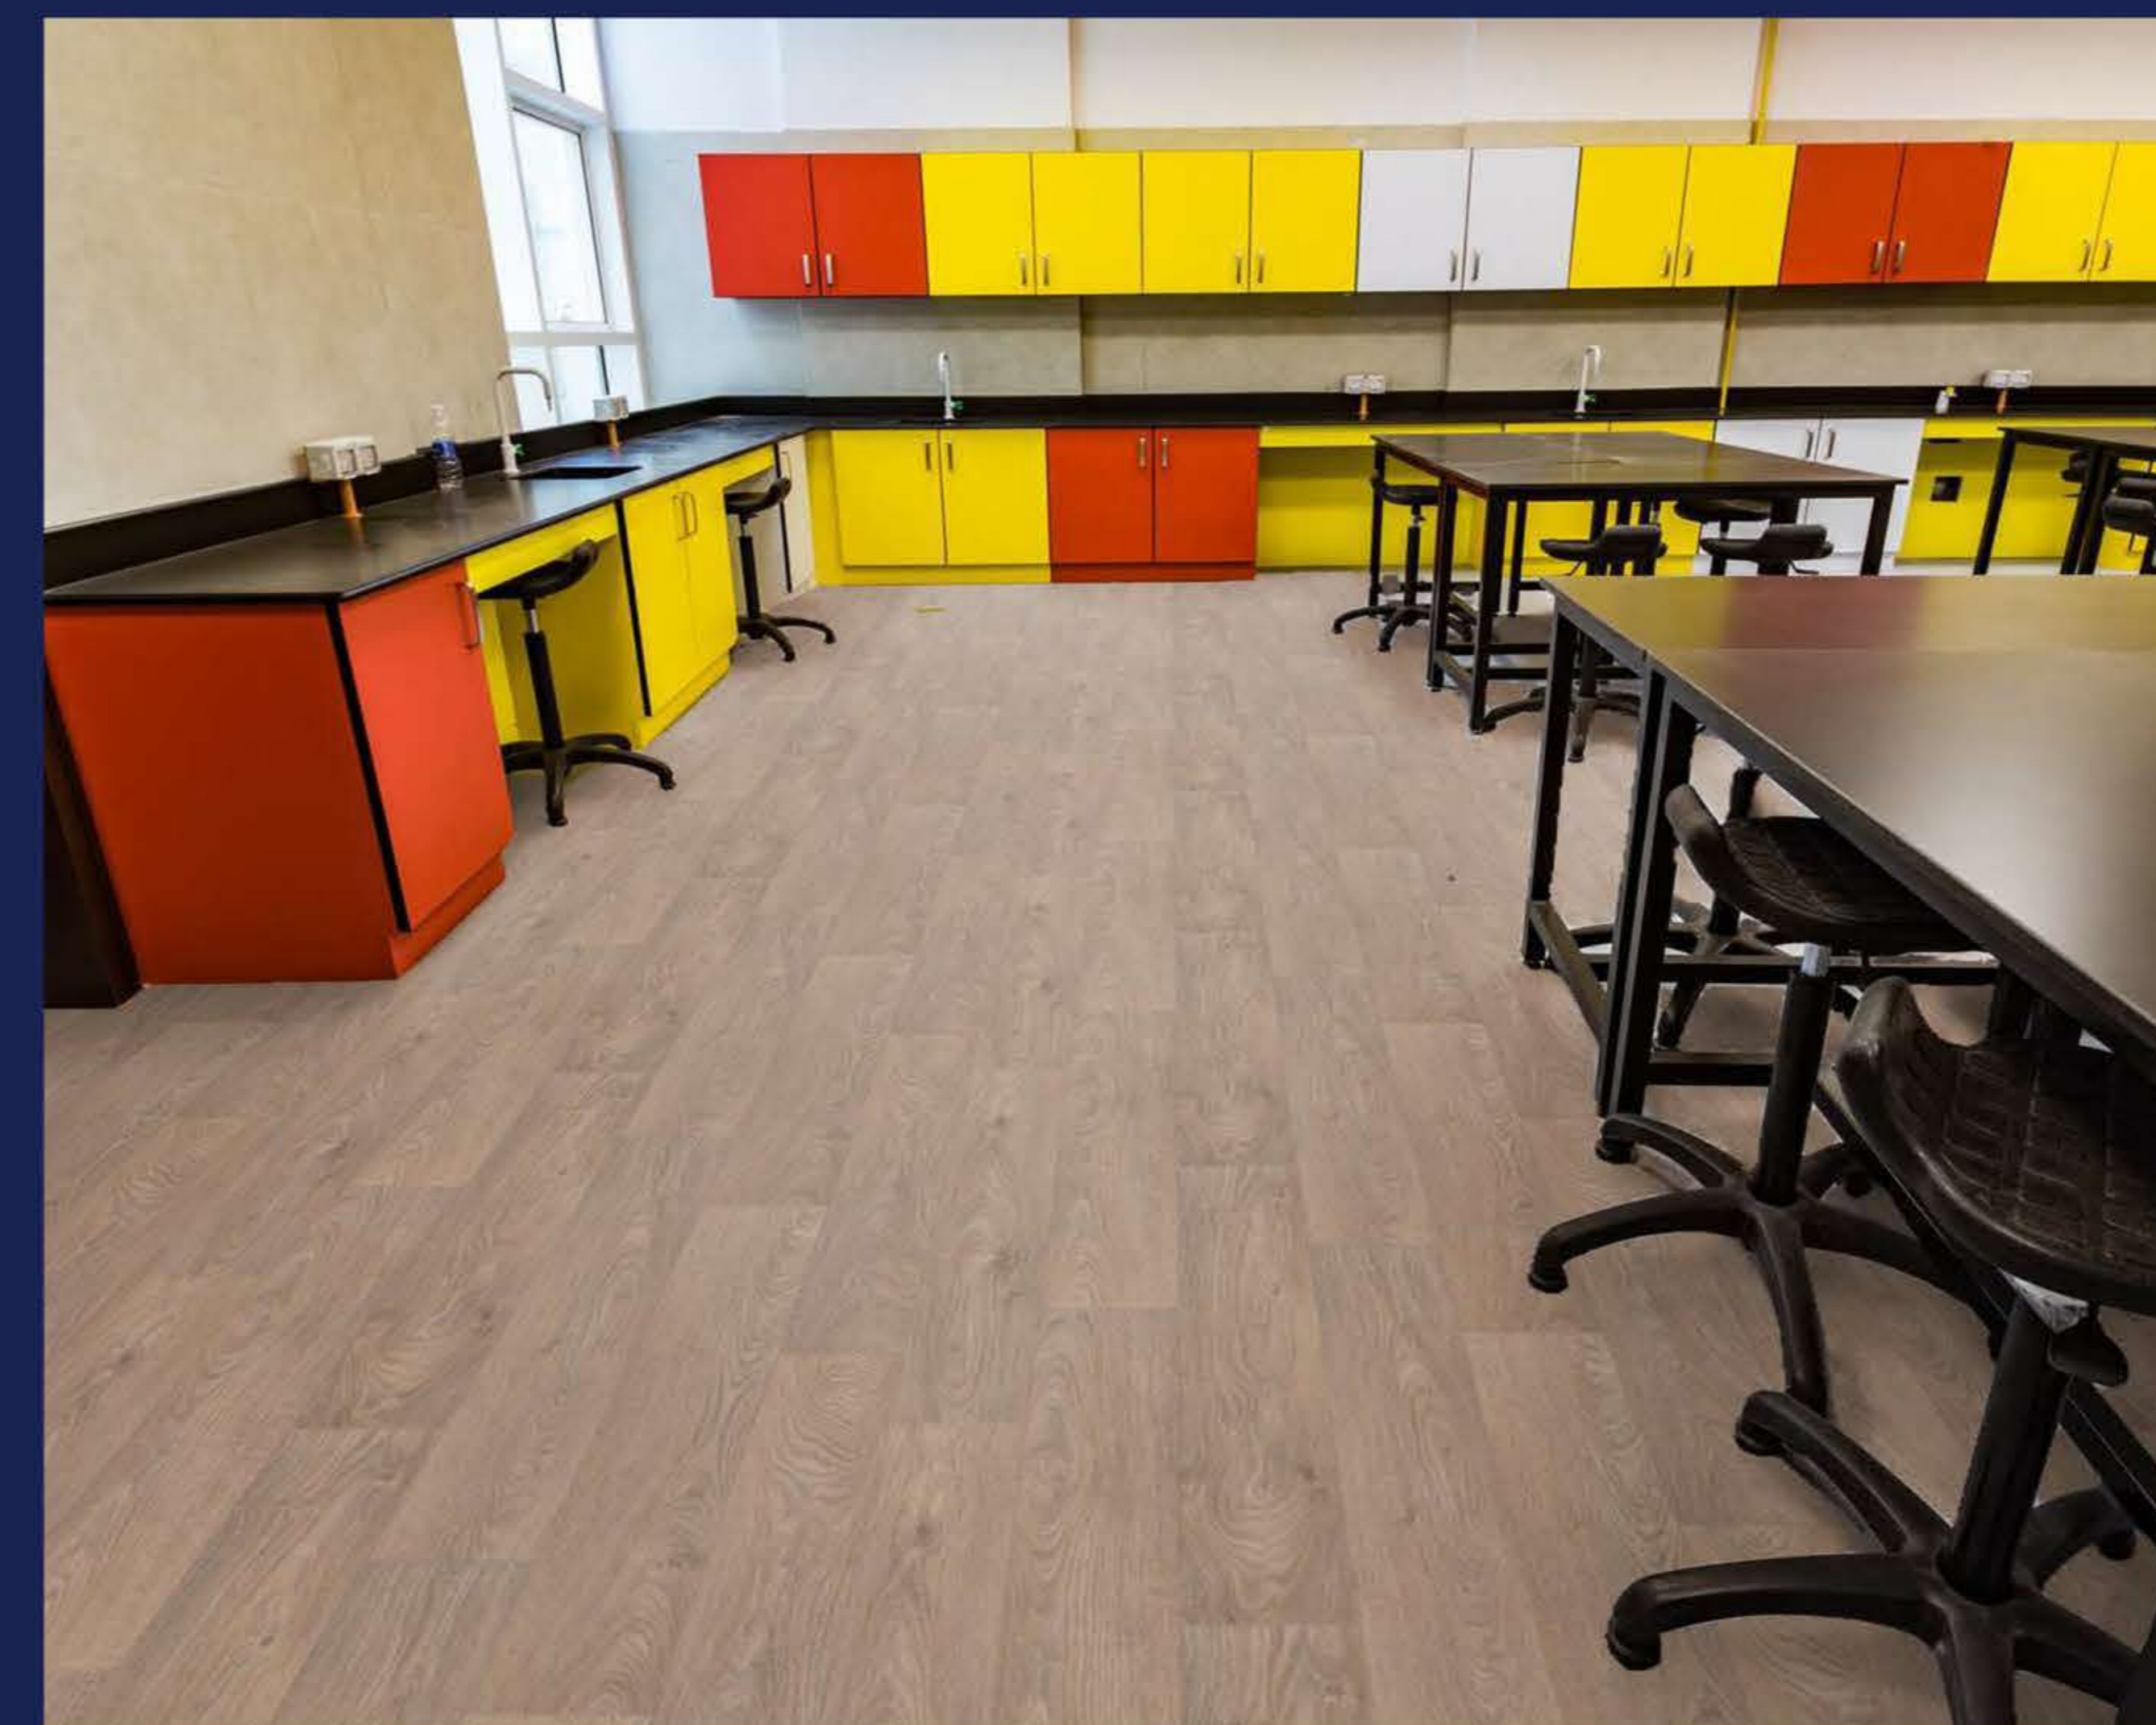

Taralay Impression




0528 - Walnut Cream

Design	: Wood
Product format	: Rolls
Sizes	: 25 ml x 2 m
Thickness :	
Compact	: 2 mm
Comfort	: 3.35
NCS	: 2005-Y40R
LRV	: 53,6

- Extreme Stain Resistance, Easy Maintenance
- High Traffic Resistance, Long-lasting Appearance
- The Best Acoustic / Indentation Performance on the Market
- Ultra-realistic Designs
- Matt Effect

Made in France

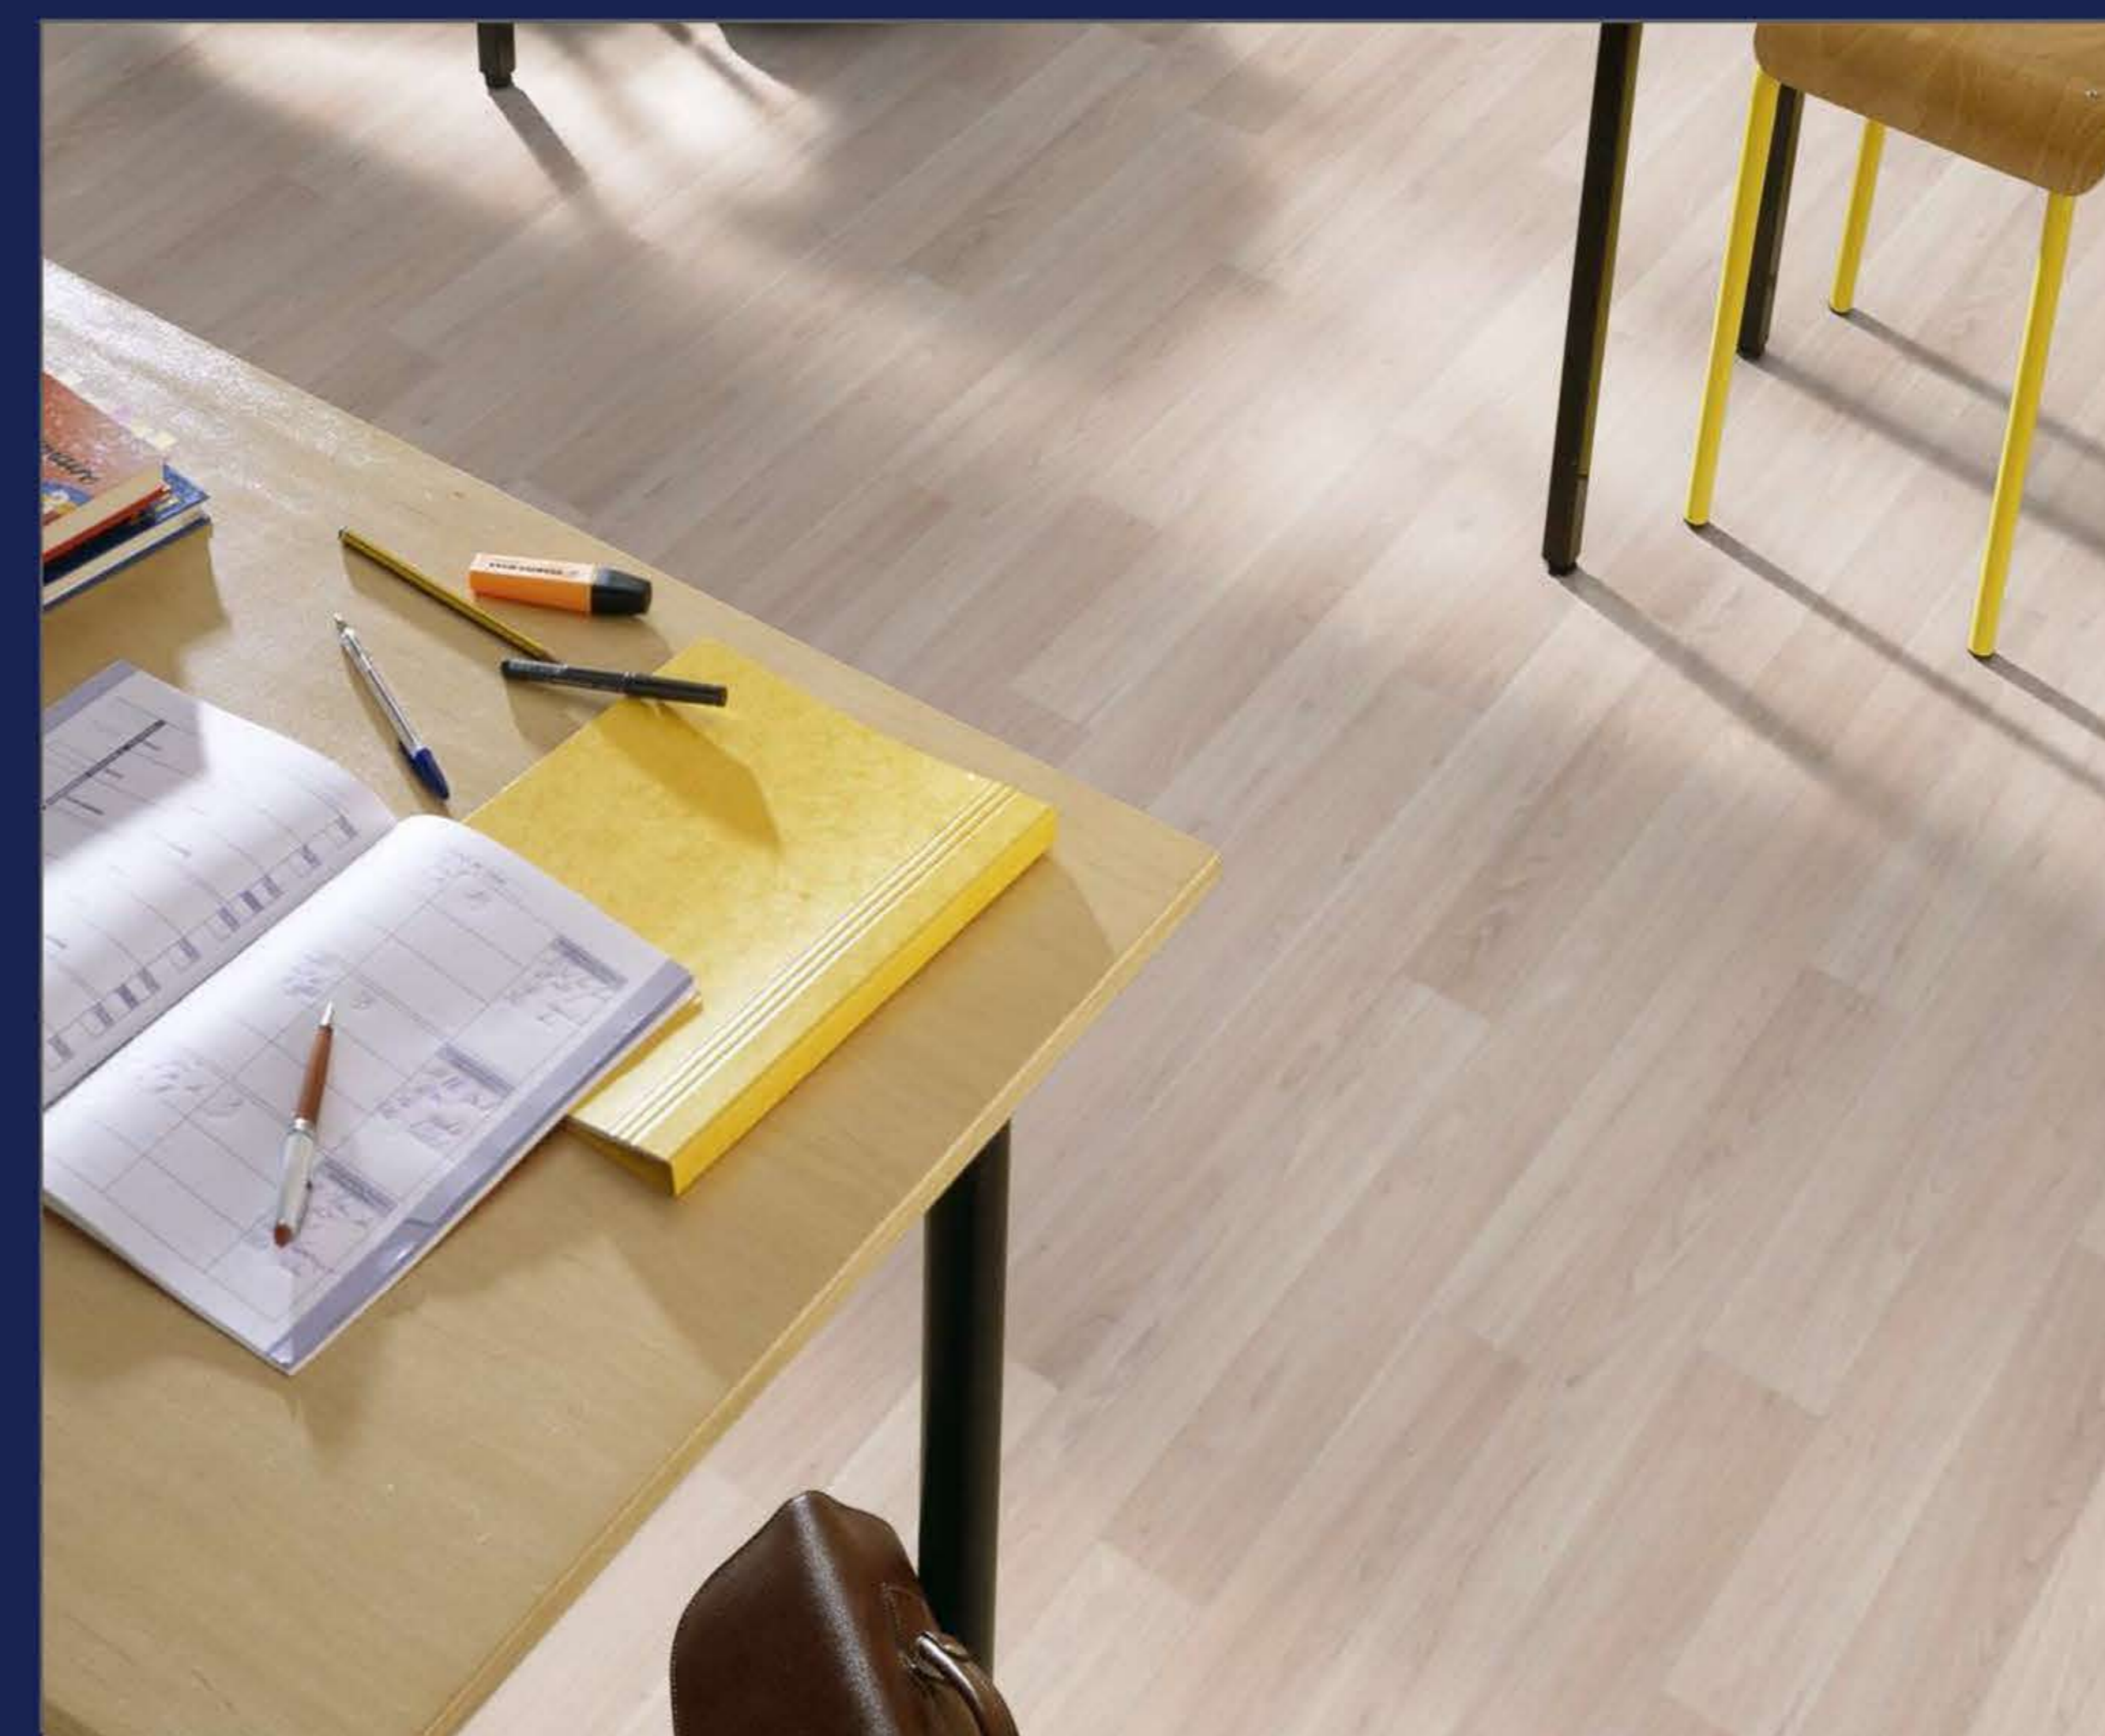

Taralay Impression



1314 - Walnut Brown

Design	: Wood
Product format	: Rolls
Sizes	: 25 ml x 2 m
Thickness :	
Compact	: 2 mm
Comfort	: 3.35
NCS	: 6020-Y40R
LRV	: 15,8

- Extreme Stain Resistance, Easy Maintenance
- High Traffic Resistance, Long-lasting Appearance
- The Best Acoustic / Indentation Performance on the Market
- Ultra-realistic Designs
- Matt Effect

Made in France



Taralay Impression



0525 - Modena

Design : Cemento

Product format : Rolls

Sizes : 25 ml x 2 m

Thickness :
Compact : 2 mm

NCS : 7005-Y50R

LRV : 14,0

- ☑ Extreme Stain Resistance, Easy Maintenance
- ☑ High Traffic Resistance, Long-lasting Appearance
- ☑ The Best Acoustic / Indentation Performance on the Market
- ☑ Ultra-realistic Designs
- ☑ Matt Effect

Made in France



Taralay Impression



0543 - Brescia

Design	: Cemento
Product format	: Rolls
Sizes	: 25 ml x 2 m
Thickness : Compact	: 2 mm
NCS	: 4502-Y
LRV	: 32,5

- Extreme Stain Resistance, Easy Maintenance
- High Traffic Resistance, Long-lasting Appearance
- The Best Acoustic / Indentation Performance on the Market
- Ultra-realistic Designs
- Matt Effect

Made in France



TARALAY IMPRESSION

gerflor.com / follow us



TARALAY IMPRESSION	
COMPACT	COMFORT

DESCRIPTION			COMPACT	COMFORT
Total thickness	EN ISO 24346	mm	2.00	3.35
	ASTM F386-02	inch	0.08	0.13
Thickness of wearlayer	EN ISO 24340	mm	0.70	0.65
	ASTM F410-02	inch	0.028	0.026
Weight	EN ISO 23997	g/sq.m	2635	2825
	-	lbs/sq.ft	-	-
Width/length of sheet	EN ISO 24341	cm / lm	200 / 25	200 / 25
	-	feet - inch	6'6" / 82'	6'6" / 82'

CLASSIFICATION				
Norm/product specification	-	-	EN ISO 10582	EN 651
European classification	EN ISO 10874	class	34 - 43	34 - 42
Fire rating	EN 13 501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance wet: ramp test with oil	DIN 51 130	class	R10	R10

PERFORMANCES				
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0
Wear group	-	group	T	T
Type binder content	EN ISO 10582	Type	I	-
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20
Residual indentation (average measured value)	-	mm	≈ 0.03	≈ 0.08
Impact sound insulation	EN ISO 717-2	dB	8	19
Castor chair test (type W)	ISO 4918	-	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	PROTECSOL® 2	PROTECSOL® 2
Chemical products resistance ⁽¹⁾	EN ISO 26987	-	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽²⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth
Antiviral activity (human coronavirus) after 2h ⁽²⁾	ISO 21702	-	> 99.7 % virucidal activity	> 99.7 % virucidal activity

ENVIRONMENT / INDOOR QUALITY AIR				
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®

RC Lyon B 726 580 152 - Crédit photos : Lovenly, Oeil Ecoute - ipe - 03/2022- Z001 3409 - Indicative documentation cost: 16 €

CE marking

CE	EN 14041	-	
		-	

(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.
 (2) The implementation of an effective cleaning regime is the most important defence against infection.

Product description and technical data sheet available in various languages. See our Gerflor Country websites.

Technical data sheets and product descriptions for TARALAY IMPRESSION COMPACT and COMFORT PLUS (0.9mm wearlayer) available in the Taralay Impression product guide.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 01/03/2022 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

we care / we act Our Commitments for a Sustainable future

CARBON FOOTPRINT*
-20 % kg CO₂ equivalent/m² between 2020 and 2025

BIOSOURCED CONTENT***
10 % by 2025

RECYCLED CONTENT
30 % by 2025

ADHESIVE FREE**
35 % by 2025

ANNUAL VOLUME RECYCLED
60 000 t by 2025



Gerflor®

* Scopes 1 and 2 defined in the GHG protocol *** % of activity with biosourced materials ** % of activity - adhesive free solution