



Glue down
or Looselay

Taralay Impression Compact

A unique, stunning and eco-friendly
collection, designed just for you



Gerflor[®]

Taralay Impression, timeless woods



Walnut Brown 1314




Moon Island 0760



Taralay Impression, timeless woods



Habana 3D Vinales 1070

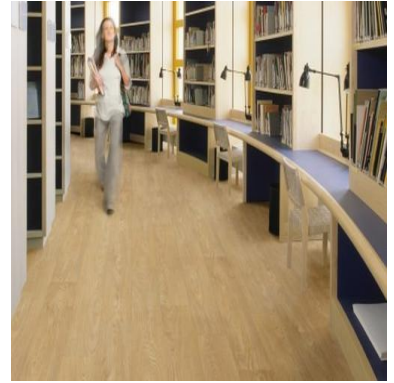

Habana 3D Trinidad 1069



Taralay Impression, stones & decorative concrete





Cemento Brescia 0543



Taralay Impression



			Taralay Impression Acoustic	Taralay Impression Compact	Taralay Impression hop Acoustic	Taralay Impression hop Compact
Description						
Total thickness	EN ISO 24346	mm	3.35	2.00	4.35	2.30
	ASTM F386-02	inch	0.13"	0.08"	0.17"	0.09"
Thickness of wearlayer	EN ISO 24340	mm	0.65	0.70	0.70	0.70
	ASTM F410-02	inch	0.026"	0.028"	0.028"	0.028"
Weight	EN ISO 23997	g/m ²	2825	2635	3670	3200
	-	lbs/sq.ft	6.23	5.81	8.09	7.05
Width/length of sheet	EN ISO 24341	cm / lm	200 / 25	200 / 25	200 / 20	200 / 20
	-	feet - inch	6'6" / 82'	6'6" / 82'	6'6" / 65'7"	6'6" / 65'7"
Classification						
Norm/product specification	-	-	EN ISO 11638	EN ISO 10582	EN ISO 11638	EN ISO 10582
European classification	EN ISO 10874	class	34 - 42	34 - 43	34 - 42	34 - 43
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2
Slip resistance wet: ramp test with oil	EN 16165 app B	classe	R10	R10	R10	R10
Performances						
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	QB 30	group	T	T	T	T
Type binder content	EN ISO 10582	type	-	I	I	I
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40
Dimensional stability (measured value)	-	%	0,08	0,08	0,03	0,03
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.20	≤ 0.10	≤ 0.20	≤ 0.10
Residual indentation (average measured value)	-	mm	≈ 0.08	≈ 0.03	≈ 0.08	≈ 0.03
Impact sound insulation	EN ISO 717-2	dB	19	8	19	8
Castor chair test (type H)	ISO 4918	-	OK	OK	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	PROTECSOL® 2	PROTECSOL® 2	PROTECSOL® 2	PROTECSOL® 2
Chemical products resistance ⁽¹⁾	EN ISO 26987	-	OK	OK	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽²⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth
Antiviral activity (human coronavirus) after 2h ⁽²⁾	ISO 21702	-	> 99.7% virucidal activity	> 99.7% virucidal activity	> 99.7% virucidal activity	> 99.7% virucidal activity
Environment / Indoor Quality Air						
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10	< 10	< 10	< 10
Certification			Floorscore®	Floorscore®	Floorscore®	Floorscore®
CE marking						
	EN 14041	-				

(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.
 (2) The implementation of an effective cleaning regime is the most important defence against infection.

Product description and technical data sheets on gerflor.com

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

 Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 01/03/2023 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

We care / We act Our Commitments for a Sustainable future



CARBON FOOTPRINT*
-20 % kg
CO₂ equivalent/m²
between 2020 and 2025



BIOSOURCED CONTENT**
10 % by 2025



RECYCLED CONTENT
30 % by 2025



ADHESIVE FREE***
35 % by 2025



ANNUAL VOLUME RECYCLED
60 000 t by 2025



* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution