MURAL CALYPSO | gerflor.com







I Fire classification (EN 13501): B-s2,d0.



I Reach compliant.



REDUCES NOSOCOMIAL DISEASES

- I Smooth and washable surface
- I > 99 % inhibits growth of bacteria according to ISO 22196
- I Hot welding between 2 rolls



WIDE RANGE OF COLORS FOR ALL APPLICATIONS

- I Matches the flooring colour trends to offer a lot of combinations
- I 31 colors references



NO WHITE LINE APPEARANCES AFTER WELDING

I Coloured backing



WATERPROOF SYSTEM

- I Available in weldable 2m-wide roll for a perfect water tighness
- I Overlapping the flooring



FAST AND EASY INSTALLATION

- I Horizontal or vertical installation
- I Complete range of accessories and tools
- I Same skills required as for resilient floring
- I Until 60 times less joint vs. ceramics





MURAL CALYPSO



Bs2d0







7001 Bamboo Haze Pearl



7740 Fabric Silk



7736 Fabric Wool



7711 Ice



7721 Manhattan Mist



7008 Fossil Ice









7004 Prism Haze Pearl





7003 Prism Ice



7009 Fossil Haze



7010 Haze



7715 Crystal



7734 Manhattan Concrete



MURAL CALYPSO



Bs2d0





7005 Blossom Snow Pearl



7611 Snow



7002 Bamboo Lotus



7714 Frost



7753 Nordic Zen




7744 Nordic Milk



7309 Lotus



7311 Linen

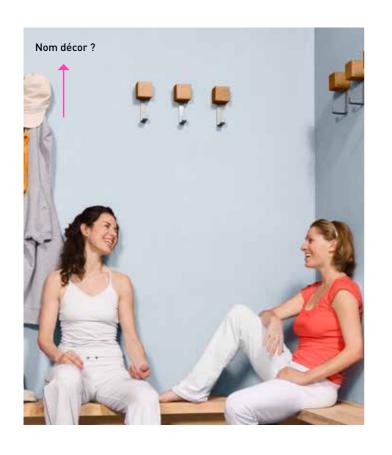





7011 Lichen

7007 Blossom Lichen






7408 Skyline



7414 Fabric Denim



7012 Breeze



MURAL CALYPSO is a multilayered wall covering in 2m width roll and with a B-s2,d0 fire classification according to EN 13501.

It is hot welded with CR41 welding rods for a perfect water tightness. It is made of a printed transparent wear layer and a coloured under layer for a better aspect of the welding. This layer comprises up to 30% of recycled products.

It does not contain any CMR 1 & 2 component and is 100% compliant with REACH.

It is 100% recyclable.

This wall covering is specially recommended for wet room areas and makes the installation in angles easier thanks to its flexibility.

The Shower System is compliant with most laws on "access for all" thanks to the installation in shower without tray.

			MURAL CALYPSO	
DESCRIPTION				
Total thickness	EN ISO 24346	mm	0.92	
Thickness of wearlayer	EN ISO 24340	mm	0.10	
Weight	EN ISO 23997	g/m²	1610	
Width of sheet	EN ISO 24341	cm	200	
Length of sheet	EN ISO 24341	ml	30	
CLASSIFICATION				
Product specification	-	-	EN 15102	
Fire rating	EN 13501-1	class	Bs2,d0	
PERFORMANCE				
Colour fastness	EN 20 105 - B02	degree	≥ 6	
Chemical resistance	EN ISO 26987	class	0K	
Anti-bacterial activity (E. coli - S. aureus - MRSA) [1]	ISO 22196	-	> 99 % inhibits growth	
CE marking				
(6	EN 15102	-	ОК	
(6	EN 14041	-	-	

⁽¹⁾ The implementation of an effective cleaning method is the best defence against infection.

MURAL CALYPSO: LESS SPEAKING FOR MORE ACTIONS



COMPOSITION 100% REACH compliant FREE of formaldehyde FREE of heavy metals FREE of solvent



RECYCLED CONTENT Up to 30% recycled content



RECYCLABILITY 100% recyclable product



INDOOR
AIR QUALITY
TVOC emissions between
10 and 100 times better than
norms requirements
Floorscore certified
No formaldehyde emission



LCA
- Eco-designed according to a product specific Life Cycle Analysis
- Product specific EPD
(Environmental Products
Declaration) available
- Manufactured in an Iso 14001
and Iso 50001 certified site
- Contribution to many Green Building
Schemes (LEED, HQE, BREEAM...)



WELLNESS
Health: Antibacterial activity
(inhibits growth > 99%)

