

MURAL CLUB

gerflor.com

NEW



Gerflor[®]
theflooringgroup

MURAL CLUB

 Compact sheet	B-s2,d0	PUR	 100% recyclable
--	---------	-----	---



0003 Sand



0006 Grey



0001 White



0007 Blue



0004 Green




0005 Yellow

MURAL CLUB



TECHNICAL PERFORMANCES

- Resistance to tearing
- Fire classification according to EN 13501: **B-s2,d0**



HYGIENE

- Smooth and washable surface
- No particle emission
- Reduces hospital acquired infections compliant with ISO 22196, inhibits growth of bacteria
- Good resistance to staining thanks to **new PUR surface treatment**



AESTHETICS

- Slightly marbled design in 6 soft colours
- Colours matching the Gerflor ranges especially the Mipolam ranges




INSTALLATION

- Horizontal or vertical installation (2m width)
- Coloured backing for a perfect welding aspect
- A complete range of accessories for a durable and easy installation



ECO-FRIENDLY

- 100% recyclable
- Contains recycled production wastes
- Raw materials 100% compliant with Reach

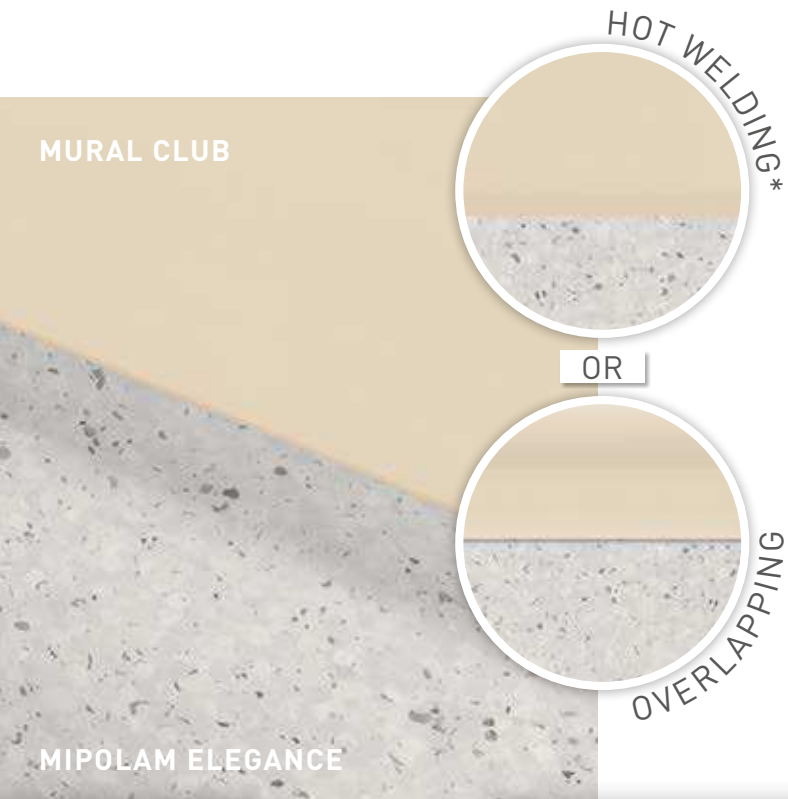

100% WATERTIGHTNESS

- **NO CONTAMINATION** areas between floor and wall protection
- **HOT WELDED*** for perfect sealing avoiding bacteria development

100% CLEAN

- Open angles for **PERFECT CLEANING** (mechanical and manual)

Information on accessories offer available on [gerflor.com](https://www.gerflor.com)

*Providing that the Gerflor installation instructions are respected. Available on [gerflor.com](https://www.gerflor.com)

MURAL CLUB

MURAL CLUB is a homogeneous wall covering in 2m width roll and with a **B-s2,d0** fire classification. It is designed to be a permanent wall covering.

It is hot welded with CR40 welding rods for better hygiene.

It is made of calendered layer with colour throughout the whole thickness for an nicer aspect of the welding. This layer comprises at least 10% of recycled products. It does not contain any CMR 1 & 2 component and is 100% compliant with REACH. It is 100% recyclable.

MURAL CLUB benefits from a **PUR surface treatment** which provided good resistance to chemical products and makes maintenance easier.

Full resistant to impact, it acts as a buffer against damage from beds, trolleys and indoor motorized vehicles and other transportation systems.

MURAL CLUB is fully impact resistant and is therefore ideal for use as a cladding in large public buildings such as hospitals care institutions dental and veterinary surgeries, clean rooms, stores and supermarkets, warehouse and storage areas.

MURAL CLUB			
DESCRIPTION / BESCHREIBUNG / DESCRIPTION / BESCHRIJVING / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE			
Total thickness / <i>Gesamtdicke</i> / Epaisseur totale / <i>Totale dikte</i> / Espesor total / <i>Essessura total</i> / Spessore totale	EN ISO 24346 (EN 428)	mm	1.0
Thickness of wearlayer / <i>Dicke Nutzschicht</i> / Epaisseur couche d'usure / <i>Dikte van de slijtlaag</i> / Espesor capa de uso / <i>Essessura camada de desgaste</i> / Spessore strato di usura	EN ISO 24340 (EN 429)	mm	1.0
Weight / <i>Flächengewicht</i> / Poids / <i>Gewicht</i> / Peso / <i>Peso</i> / Peso	EN ISO 23997 (EN 430)	g/m²	1780
Width/length of sheet / <i>Bahnenbreite/-länge</i> / Largeur/longueur des lés / <i>Rolbreedte/Rollengte</i> / Ancho/largo de rollos / <i>Largura/comprimento dos rolos</i> / Larghezza/lunghezza dei teli	EN ISO 24341 (EN 426)	cm / ml	200 / 30
CLASSIFICATION / KLASSIFIZIERUNG / CLASSIFICATION / CLASSIFICATIE / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI			
Norm/product specification / <i>Produkt Norm</i> / Norme produit / <i>Technische eigenschappen</i> / Normas / <i>Normas</i> / Norma prodotto	-	-	EN 15 102
Fire rating / <i>Brandverhalten</i> / Classement feu / <i>Brand classificatie</i> / Fuego / <i>Fogo</i> / Reazione al fuoco	EN 13 501-1	class	B-s2,d0
PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / PERFORMANCES / TESTRESULTAAT / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE			
Colour fastness / <i>Lichtechtheit</i> / Solidité lumière / <i>Lichtechtheid</i> / Resistencia a la luz / <i>Estabilidade das cores</i> / Solidità alla luce	EN 20 105 - B02	degree	≥ 6
Surface treatment / <i>Oberflächenvergütung</i> / Traitement de surface / <i>Oppervlaktebehandeling</i> / Tratamiento de superficie / <i>Tratamento de superficie</i> / Trattamento di superficie	-	-	PUR
Chemical resistance / <i>Verhalten gegenüber Chemikalien</i> / Résistance aux produits chimiques / <i>Chemische bestendigheid</i> / Resistencia a los productos químicos / <i>Resistência aos produtos químicos</i> / Resistenza ai prodotti chimici	EN ISO 26987 (EN 423)	-	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) / <i>Antibakterielle Aktivität (E. coli - S. aureus - MRSA)</i> / Activité anti-bactérienne (E. coli - S. aureus - MRSA) / <i>Antibacteriële activiteiten (E. coli - S. aureus - MRSA)</i> / Actividad antibacteriana (E. coli - S. aureus - MRSA) / <i>Atividade antibacteriana (E. coli - S. aureus - MRSA)</i> / Azione antibatterica (E. coli - S. aureus - MRSA) ⁽¹⁾	ISO 22196	-	> 99% inhibits growth / > 99% <i>Wachstumshemmend</i> / > 99% ne favorise pas la prolifération / > 99% <i>remt de groei van bacteriën</i> / > 99% inhibe el crecimiento / > 99% <i>inibe o desenvolvimento</i> / > 99% inibisce la crescita
CE MARKING / CE KENNZEICHNUNG / MARQUAGE CE / EG-CONFORMITEITSMERK / MARCA DE CONFORMIDAD CE / MARCA DE CONFORMIDADE CE / MARCATURA CE DI CONFORMITA			
CE	EN 15 102	-	OK

(1) The implementation of an effective cleaning regime is the most important defence against infection.

Gerflor Don't forget our complementary ranges!


Handrails


Wall Coverings & Protections


Entrance mats


Skirtings & Profiles

Gerflor Be connected!



#Gerflor


www.gerflor.com

