Iban & Iban Plus

Solution Dyed Nylon

Carpet Tiles & Planks



Iban Plus LT. GREY 774




Iban Plus FABOULAS Gold 793

Iban

Solution Dyed Nylon


Carpet Tiles & Planks

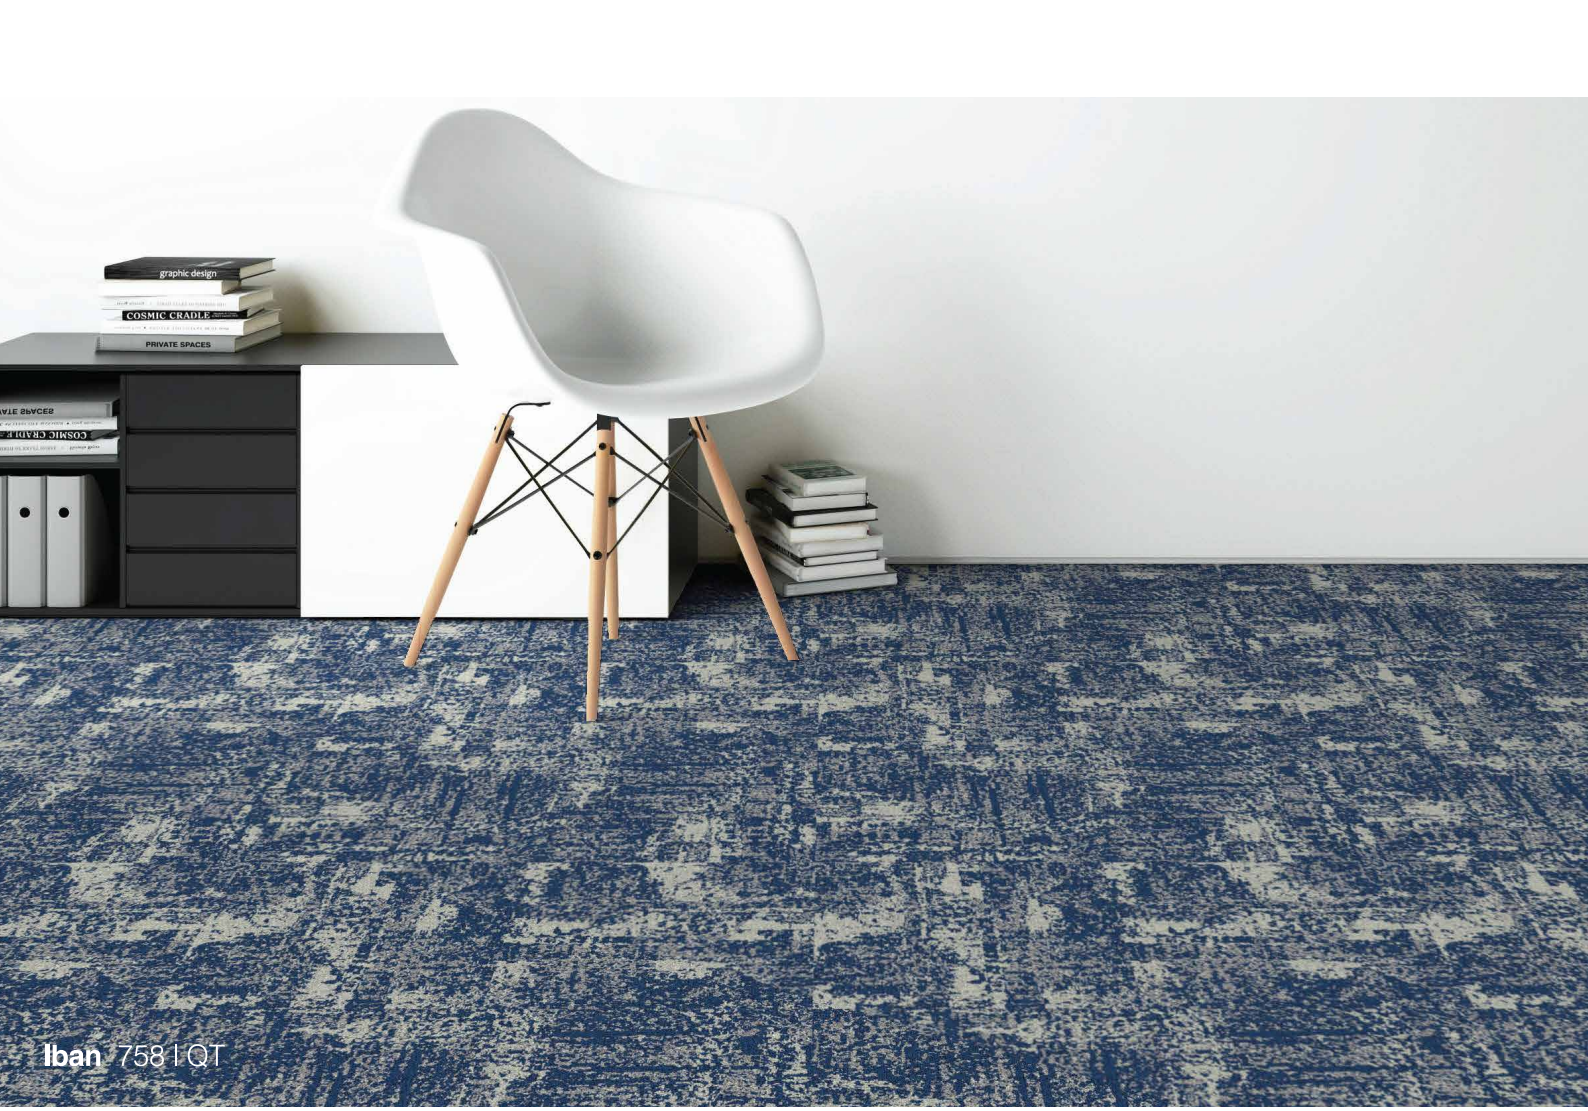

Iban 758 | QT



Iban - The FORCES Dark Grey 779

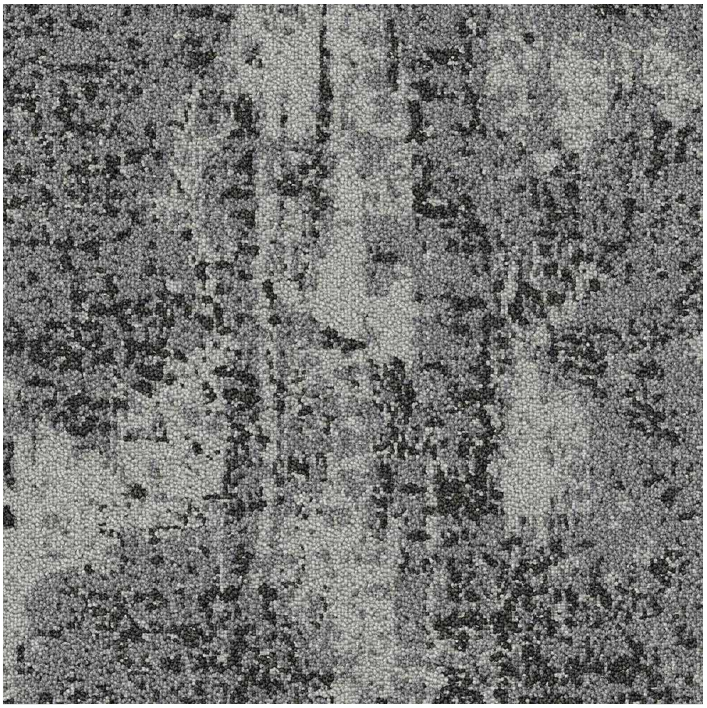

Iban - ADCB Lt. Grey 774

50cm
50cm

Iban

Solution Dyed Nylon


Carpet Tiles & Planks



Iban 779 | QT



Iban - SWIFT Beige 794

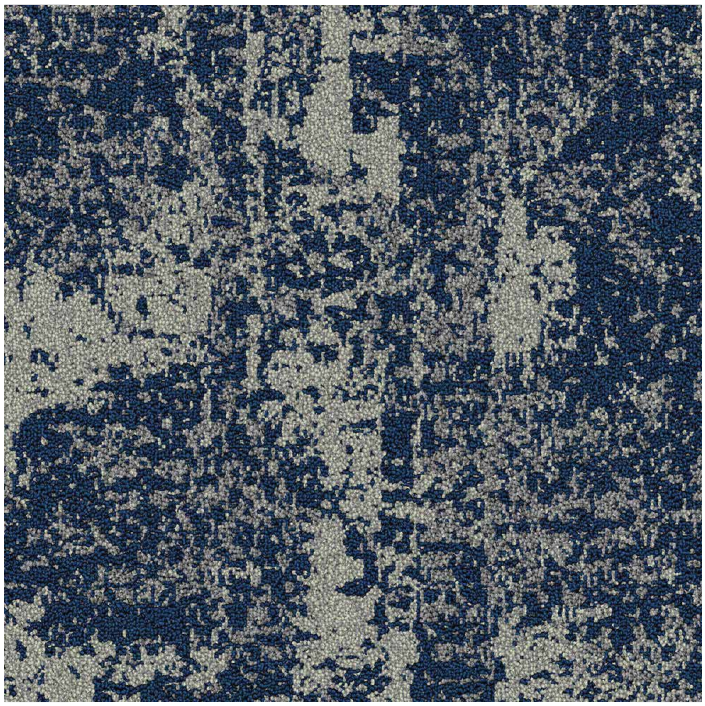

Iban - SIBLING Navy 758



Iban

Solution Dyed Nylon

Carpet Tiles & Planks



Iban 794 | QT



Iban - ADCB Vanilla 792



Iban - FABULOUS Gold 793

Iban Plus

Solution Dyed Nylon

Carpet Tiles & Planks



Iban Plus Faboulous Gold 793


Iban Plus

Solution Dyed Nylon

Carpet Tiles & Planks



Iban Plus - FABULOUS Gold 793

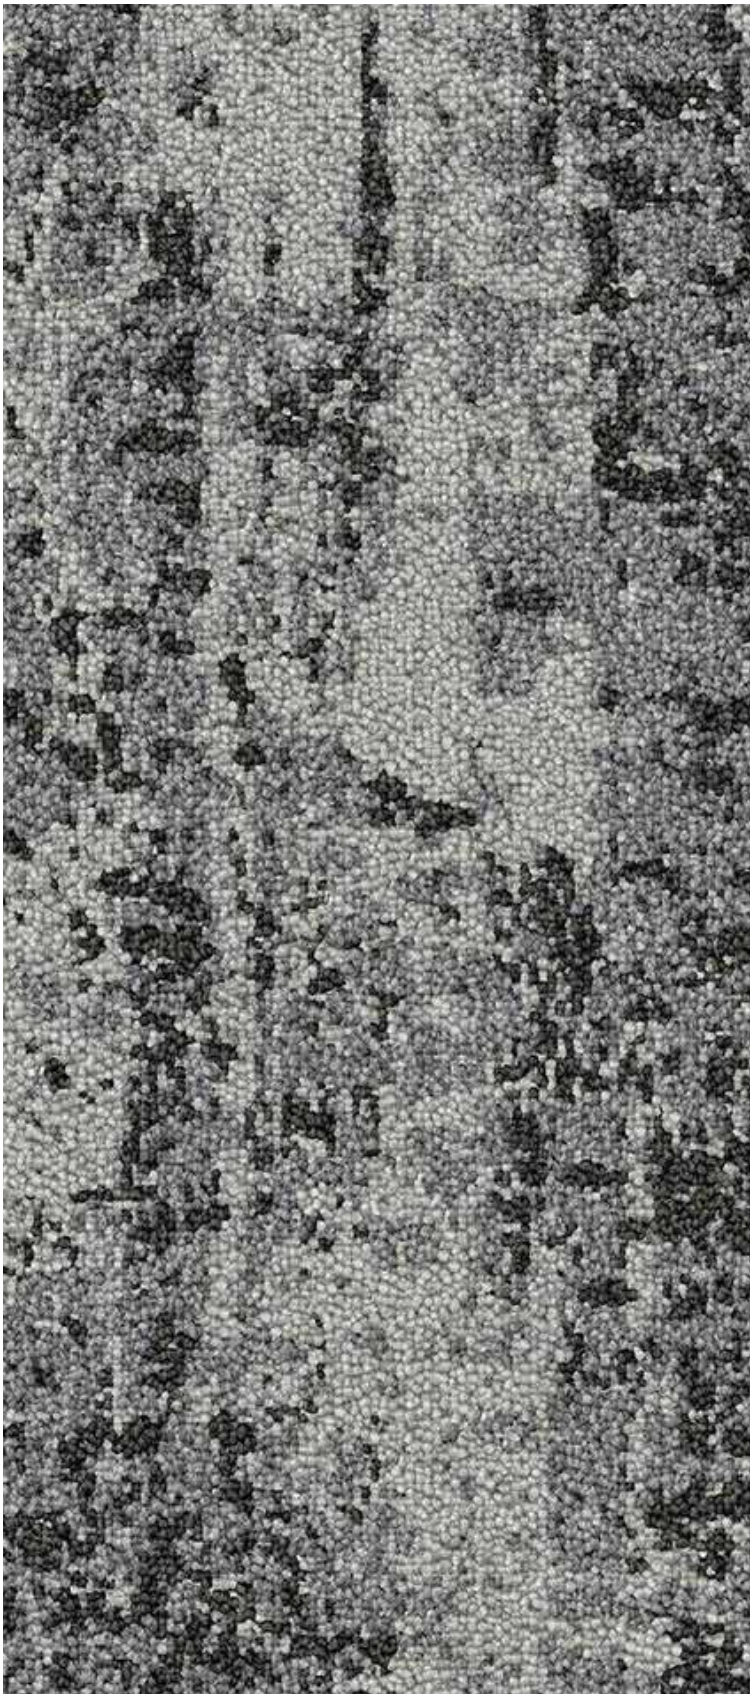

Iban Plus - ADCB Lt. Grey 774



Plank


Iban Plus

Solution Dyed Nylon

Carpet Tiles & Planks



Iban Plus - ADCB Vanilla 792

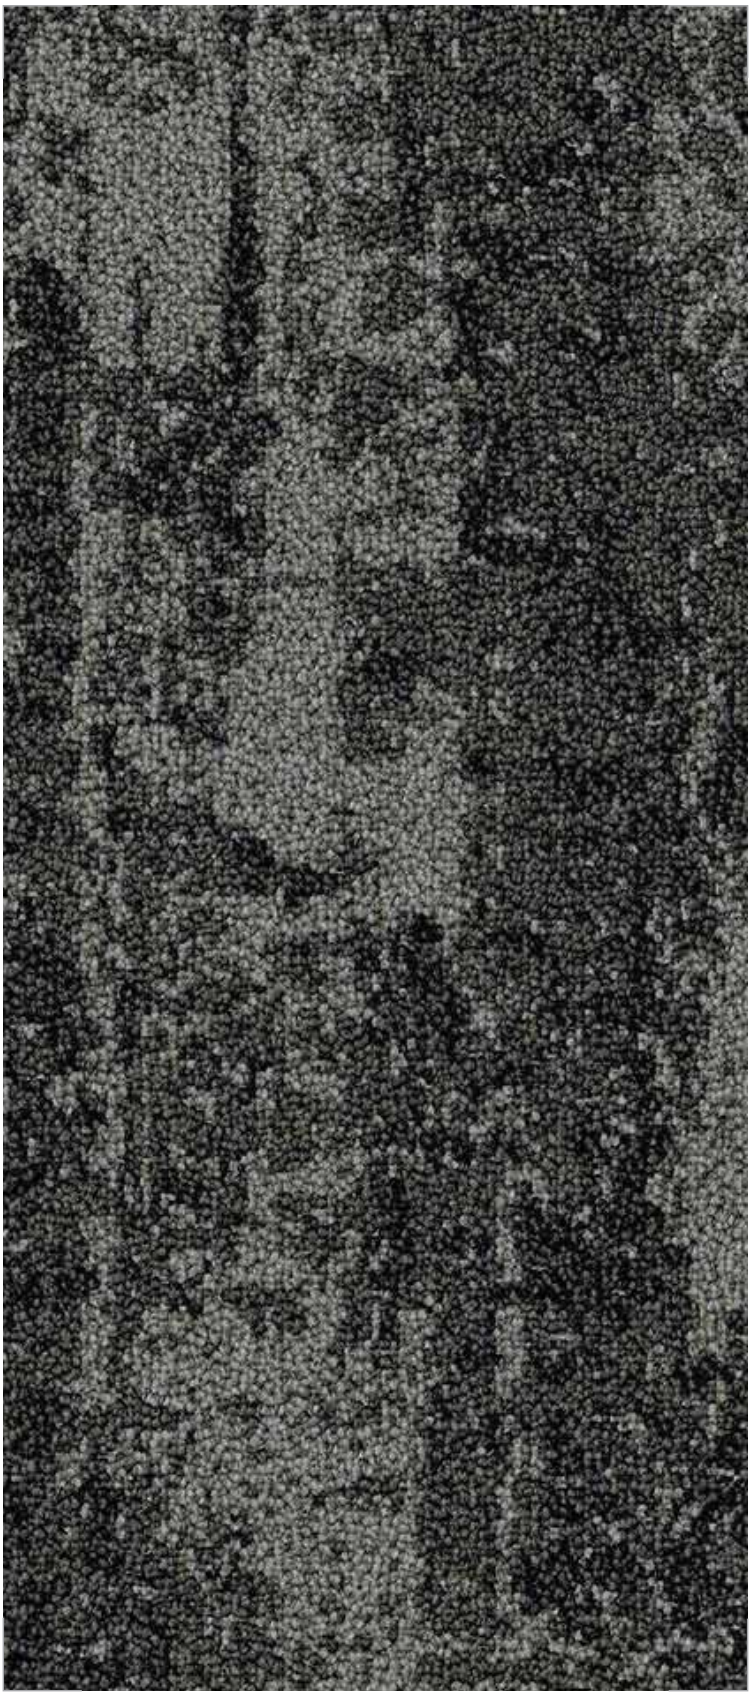

Iban Plus - The FORCES Dark Grey 779



Plank

Iban Plus

Solution Dyed Nylon

Carpet Tiles & Planks



Iban Plus - The FORCES Dark Grey 779


Iban Plus

Solution Dyed Nylon

Carpet Tiles & Planks



Iban Plus - SWIFT Beige 794

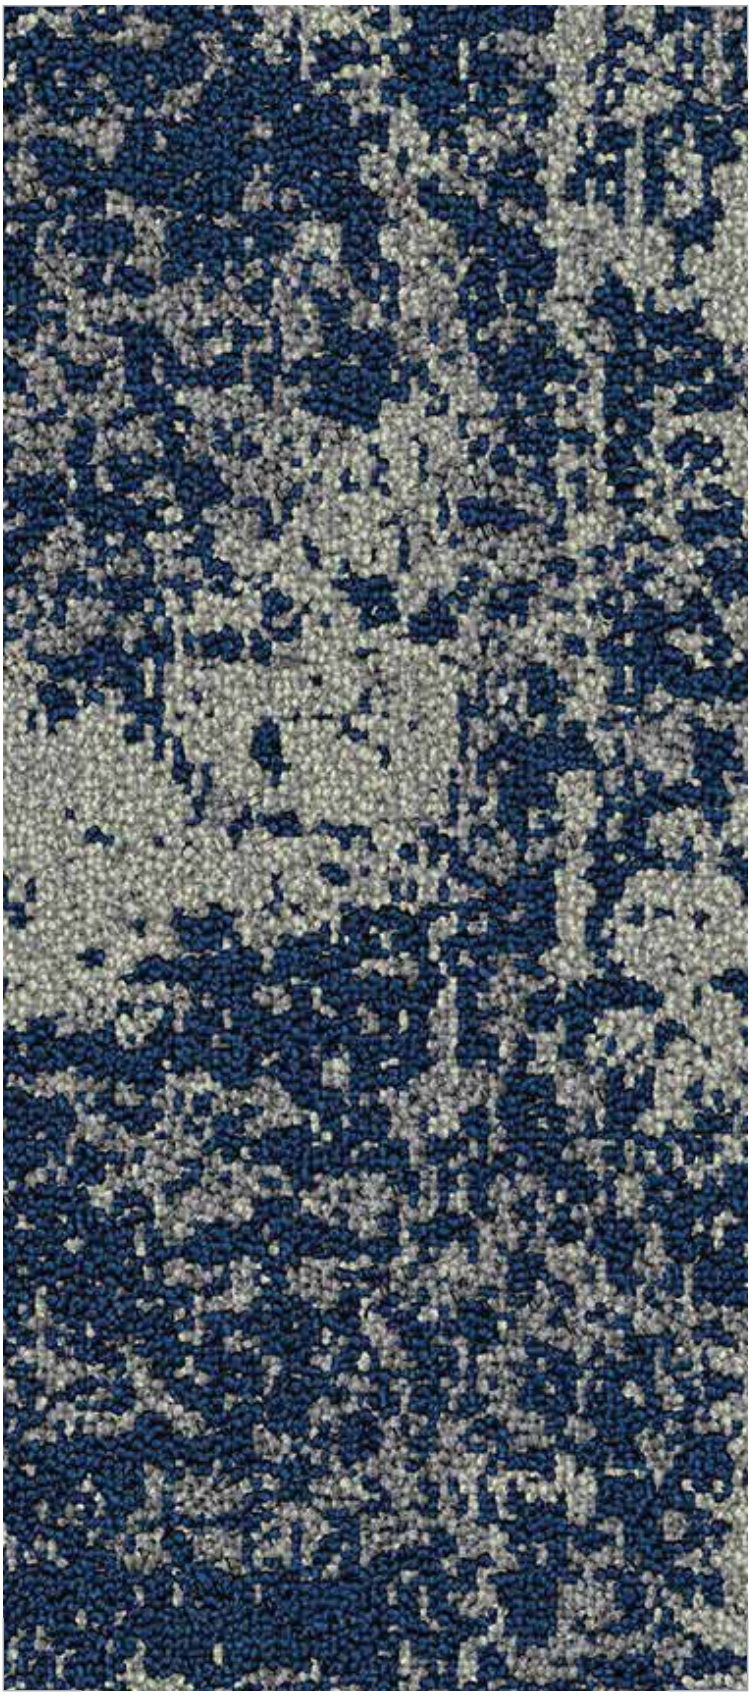

Iban Plus - SIBLING Navy 758



Plank

Iban Plus

Solution Dyed Nylon

Carpet Tiles & Planks




Iban Plus 793 | Half Basket

Iban & Iban Plus

Solution Dyed Nylon

Carpet Tiles & Planks



Tile Plank


Product Information

Construction	LOOP	LOOP
Style	**IBAN**	**IBAN PLUS**
Fiber	Premium Solution Dyed Nylon	Premium Solution Dyed Nylon
Pile Weight	770 gm/m^2	770 gm/m^2
Total Weight	6.0 kg/m^2	5.8 kg/m^2
Gauge	1/10th	1/10th
Primary Backing	Non-Woven	Non-Woven
Secondary Backing	PVC **StableShield**	**Comfort Plus Cushion Back**
Size	50cm x 50cm	50cm x 100cm
Pile Height	3.5 mm ±0.5 mm	3.5 mm ±0.5 mm
Total Thickness	7.0 mm ±0.5 mm	9.0 mm ±0.5 mm
Recommended Installation	Quarter Turn & Brick	Basket, Half Basket & Herringbone
Tile / Carton	20 Pcs (5m^2)	10 Pcs (5m^2)

Technical Performances

Classification	Commercial / Heavy Contract	Class 33
VOC (Green Label Plus)	ASTM D5116-06	< 0.5 mg/m^2/hour (CRI GLP)
Flammability	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
Reaction to Fire	ASTM E648-08	Cfl-S1
Static Propensity	ISO 6356	0.2 KV
Color Fastness	AATCC/16	5/5 on Grey Scale
Termal Resistance	ISO 8302	0.04 m^2/KW
Impact Sound Insulation	ISO 140-8	23 dB
Dimensional Stability	EN 986	< 0.20%
Castor Chair Test	DIN 54324	R ≥ 2.4
Smoke Density	EN ISO 9239-1:2002	< 450





Terms and Conditions: Specifications are subject to manufacturing tolerance and maybe changed without prior notice. Dye lots may vary in colour from sample and between production lots. All product purchases are Subject to TekSol Standard Terms and conditions of Sale. Please refer to our installation Guideline, Maintenance Manual and Warranty Document for further clarification.

Disclaimer: This Brochure is presented for informational purposes only. Every effort is made to ensure that carpet images are of an accurate representation of the product. However, they are for illustrative purposes only and colour variations may occur in actual product, and between die series. Please note that lineal pattern when installed directional, may produce an undesired effect when lines of the same colour meet of edges. Installer need to monitor this during installations and reposition tiles where appropriate. Patterns that are random in nature may contain additional colour ways to the ones displayed on the samples. Please consult your commercial sales consultant for further informations.