

ICONIK 260D

VINYL ROLLS



ICONIK 260D

VINYL ROLLS



Carcassonne Oak / Light Grey - 27123012



Carcassonne Oak / Medium Grey - 27123011



Carcassonne Oak / Dark Grey - 27123010



Carcassonne Oak / Brown - 27123013



Oak / Grey Beige - 27123063



Oak / Metallic - 27123094

ICONIK 260D

VINYL ROLLS



Oak / Dark Beige - 27123062



Vintage Oak / Beige - 27123124



Vintage Oak / Natural - 27123116



Vintage Oak / Brown - 27123123



Vintage Oak / Black - 27123122



Vintage Oak / Light Beige - 27123118

ICONIK 260D

VINYL ROLLS



Vintage Oak / Grey - 27123121



Vintage Oak / White - 27123120




Vintage Oak / Middle Grey - 27123119



Vintage Oak / Dark Black - 27123117



Infinity Oak / Natural - 27123088

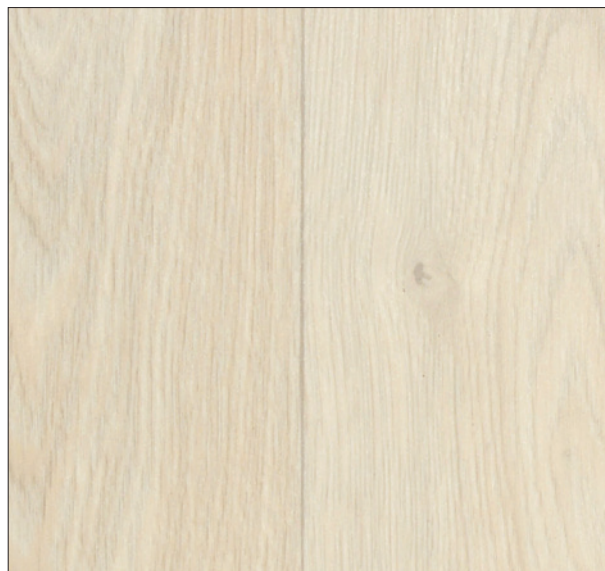

Infinity Oak / Beige - 27123086

ICONIK 260D

VINYL ROLLS



Infinity Oak / White - 27123089



Infinity Oak / Grey - 27123023




Infinity Oak / Dark Grey - 27123087



Rustic Oak / Red Brown - 27123101



Rustic Oak / Grey - 27123024

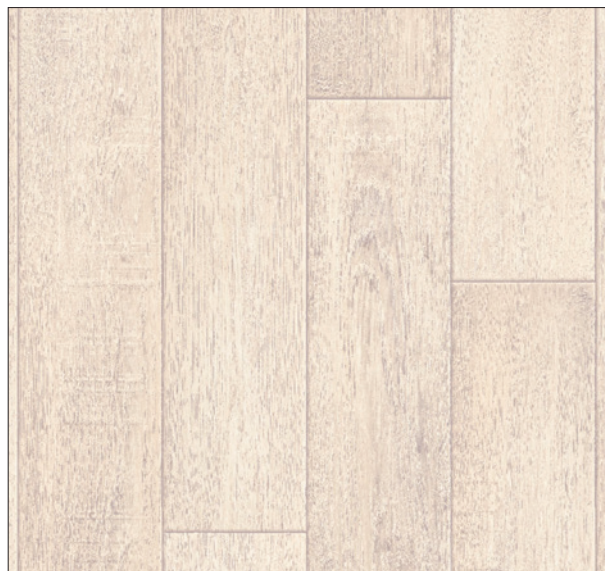

Rustic Oak / White - 27123102

ICONIK 260D

VINYL ROLLS



Rustic Oak / Dark Grey - 27123100



Rustic Oak / Light Beige - 27123073



Valley MID OAK 27123135

TECHNICAL DATA VINYL FLOORING 2020

Classification	Norm	Tarkett Value
Product type	EN ISO 26986	Expanded (cushioned) poly(vinyl chloride) floor covering
Domestic classification	EN ISO 10874	22 Domestic General Medium
Binder content	ISO 11638	Type I
Technical characteristics		
Total thickness	ISO 24346	2.6 mm
Wear layer thickness	ISO 24340	0,22 mm
Total weight	ISO 23997	1475 g/m ²
Roll Width		4 m
Roll Length	EN ISO 24341	30 m
Performance for CE Marking		
Declaration of Performance #	EN 14041	0132-0075-DOP-2020-01
Reaction to fire	EN 13501-1	Bfl-s1
Slip resistance	EN 13893 DIN 51130	$\mu \geq 0,30$ (DS) R 9 / R 10 * (depending on surface structure)
Electrostatical propensity	EN 1815	< 2 kV
Thermal resistance (in m ² ·K/W)	ISO 10456 / EN 12524-1	0,04
Formaldehyde emission	EN 717-1	E1
Technical Performance		
Impact sound reduction - ΔL_w	EN ISO 717-2	16 dB
Residual indentation	ISO 24343-1	0.17 (best measured value)
Chemical resistance	ISO 26987	Not affected
Underfloor heating		Suitable (maximum 27°C)
Colour fastness to light	ISO 105-B02	≥ 6
Dimensional stability	ISO 23999	$\leq 0,20$ %
Sustainability, Environment & Indoor Air Quality		
Recyclable		Yes
French VOC rating		A+
Phthalate content		Phthalate-free
TVOC emissions after 28 days	EN 16516	Gold ($\leq 100 \mu\text{g} / \text{m}^3$)
Product ID		
Residential warranty (in years)		10
Surface treatment		Extreme Protection

The above information is subject to modification for the benefit of further improvement (2020-01).

