


546 Cyrus



555 Gero



556 Louis

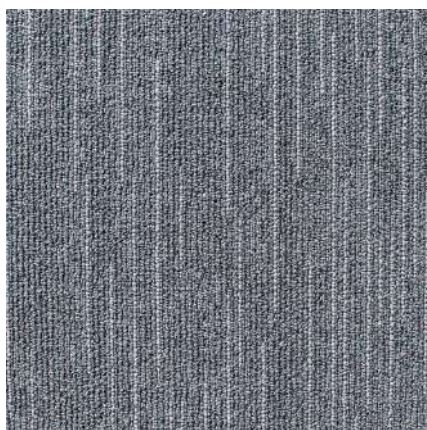

573 Timur



SPECIFICATION

Product Name	:	Imperial
Fiber	:	Solution Dyed Nylon
Yarn Type	:	BCF
Construction	:	Loop Pile
Pile Weight	:	520 g/m ²
Number of Tufts	:	205400/m ²
Tufting Gauge	:	1/10"
Size	:	50 cm x 50 cm
Pile Thickness	:	2.5 mm / 5.5 mm
Total Thickness	:	8.0 mm
Primary Backing	:	Non-Woven
Secondary Backing	:	PVC
Packing	:	20 Tiles (5m ²) in a Box
Recommended Installation	:	Quarter Turn or Brick

PERFORMANCE SPECIFICATION

VOC Emission	ASTM D5116-06	<0.5 mg/m ² /hour (CRI GLP)
Flammability	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
Reaction to Fire	EN ISO 9239-1:2002	Dfl-s1
Static Propensity	ISO 6356	0.2 kV
Color Fastness	AATCC/16	5/5 on Grey Scale
Thermal Resistance	ISO 8302	.04m ² K/W
Impact Sound Insulation	ISO 140-8	ΔL_w 23dB
Sound Absorption Level	EN ISO 11654	α_w : 0.15(H)
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%
Castor Chair Test	DIN 54324	R \geq 2.4



- Shading or Pile reversal is an inherent attribute of cut pile carpets and not a manufacturing defect
- Color may slightly vary from one dye lot to another dye lot
- Total weight of the product can have a normal variation of \pm 5%
- We reserve the right to amend the above specification without prior notice with changes in raw material supplies