

LVT CLICK

Size : 3.2(T) X 150 (w) X 1,220mm (L) : (W/L : 0.3mm)



T

R10

Tile



PUR

EASY CLEAN UV

Bfl-S1



floor score

floor score

DIBt



Wear Out Warranty

7 Year


Phthalates

FREE

DEHP, DBP, BBP, DIDP, DINP, DNOP



ZTE-JD004-Southport Oak

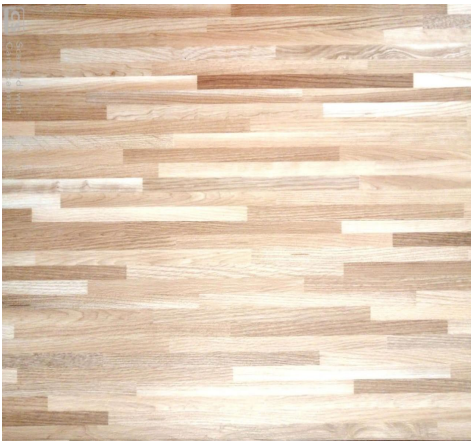

ZTE-JD018-Multi Strips Oak



ZTE-JD146-Smoked Oak



ZTE-BA006-Heritage Oak



ZTE-YM012-Oak White



ZTE-BA011-Cinnaber Oak


Hospital


Retail


School


Home


Office


Cafe


Restaurant

Out of Stock



ZTE-CP105-Carbonized Oak



ZTE-BG104-Grey



ZTE-JD007-London Oak



ZTE-BK130-Light Oak



ZTE-YM009-Java Oak




ZTE-BG104-Grey

Out of Stock




ZTE-BK130-Light Oak

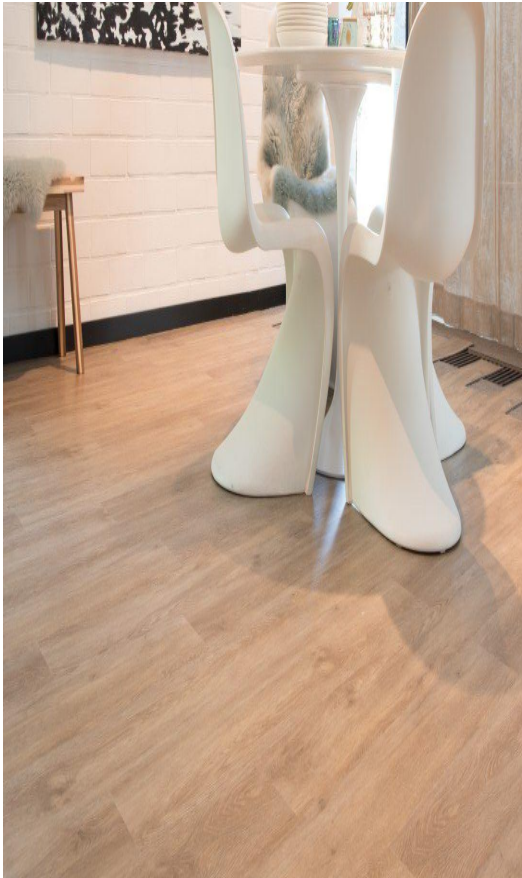

ZTE-JD007-London Oak

1. Product Structure

Size : 3.2T X 150mm X 1,200mm (W/L 0.3mm)

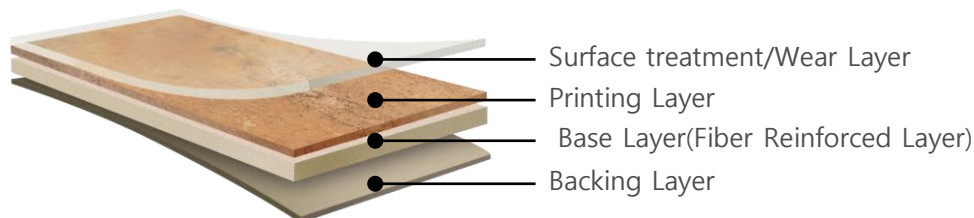

2. Features

● Phthalate Free

- Use 100% Phthalate Free plasticizer only
- Free of 6 types of harmful phthalate plasticizer(DOP, BBP, DBP, DIDP, DnOP, DINP)

● Stronger Lock

- Patent-pending Fiber Reinforced Layer strengthens locking strength

● Easy Clean UV coating

- Exclusive PUR treatment technology provides stronger resistance to contaminants
- Easy cleaning and low maintenance cost(No wax & No polish needed)

3. Technical Data

Characteristic	Standard	3.2T W/L 0.3mm)
Type of Flooring	EN ISO 10582	PVC Homogeneous
Size	EN ISO 24342	≤0.15%
Straightness & Squareness		≤0.35mm
Classification	EN 685	Class 23/31
Overall Thickness	EN ISO 24346	3.2mm
Wear Layer Thickness	EN ISO 24340	0.3mm
Wear Resistance	EN 660-2	T
Residual Indentation	EN ISO 24343-1	≤0.1mm
Dimensional Stability	EN ISO 23999	≤0.25%
Curling		≤2mm
Color Fastness to Light	EN ISO 105-B02	≥6
Castor Chair Test	EN ISO 4918	No Change
Burning Characteristic	EN 13501-1	Bfl-s1
Chemical Resistance	EN ISO 26987	No Change
Slip Resistance	EN 13893 DIN 51130	Class DS R10
Bacteria Resistance	EN ISO 846 Part C	Does not favour growth

