



LAREEN LVT

LVT COLORS

218-9



170-8




189-8





LVT COLORS

157-5

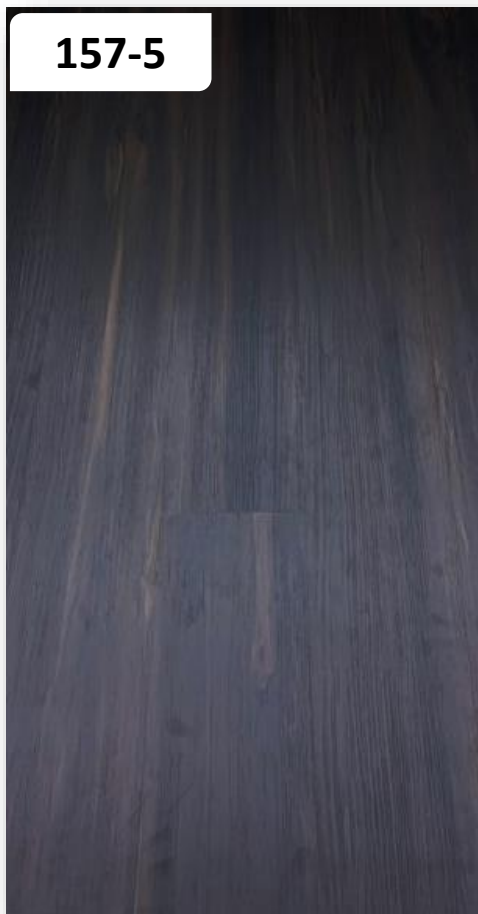

165-2



215-5





LVT COLORS

167-7



171-1



169-25



LVT COLORS

211-19



211-4



➤ LAREEN LVT



LAREEN

LUXURY VINYL TILES

TECHNICAL SPECIFICATIONS

STANDARD		RESULT
Total Thickness	ISO 24346	4mm
Width		180mm
Length		1,220mm
Wear layer	ISO 24346	0.3mm
Bevelled Edge		Zero Joint
Surface Treatment		Scratch Guard PU Coating.
Click Locking System		Uni-Fit Patented Locking System
Water Resistance		100%
Mass Per Unit Area	ISO 23997:2007 (E)	6280
Standards	EN 16511	
Slip Resistance	En 13893:2003	R10
Pendulum Test Dry	BS 7976-2:2002+A1:2013	Longitude direction: Mean:46; Min.:46 Horizontal diriction: Mean: 53; Min.:52
Pendulum Test Wet	BS 7976-2:2002+A1:2013	Longitude direction: Mean:30; Min.:30 Horizontal diriction: Mean: 20; Min.:20
Impact Sound Reduction	ISO 1014-3-2010+A1-2015	ALw=24dB
Static	ASTM F970-17	Pass 0.01mm
Underfloor Heating		Suitable for Wet systems up to 27 C
Dimensional Stability	ISO 23999:2008 (E)	Pass Machine direction: 0.05% Pass Transverse direction: 0.09%
Expansion/Shrinkage 23-80	ISO 24336:2005 (E)	Pass 0.2%
Click Tension	Per Unlin's/Valinge's Standard	Pass Long Sides: 3,320 kg/m Pass Short Sides: 3,710 kg/m
Reaction to Fire	EN 13501-1:2010	Bfl-S2
Thermal Resistance	EN 12667:2001	0.089m2.k/w
Chemical Resistance	ISO 26987:2008 (E)	Pass Not Affected
Colour Fastness	ASTM F1514-03	Pass E 0.49
Staining	EN 438-2:2016 (E)	Pass Group 1&2: Grade 5 Pass Group 3: Grade 5