





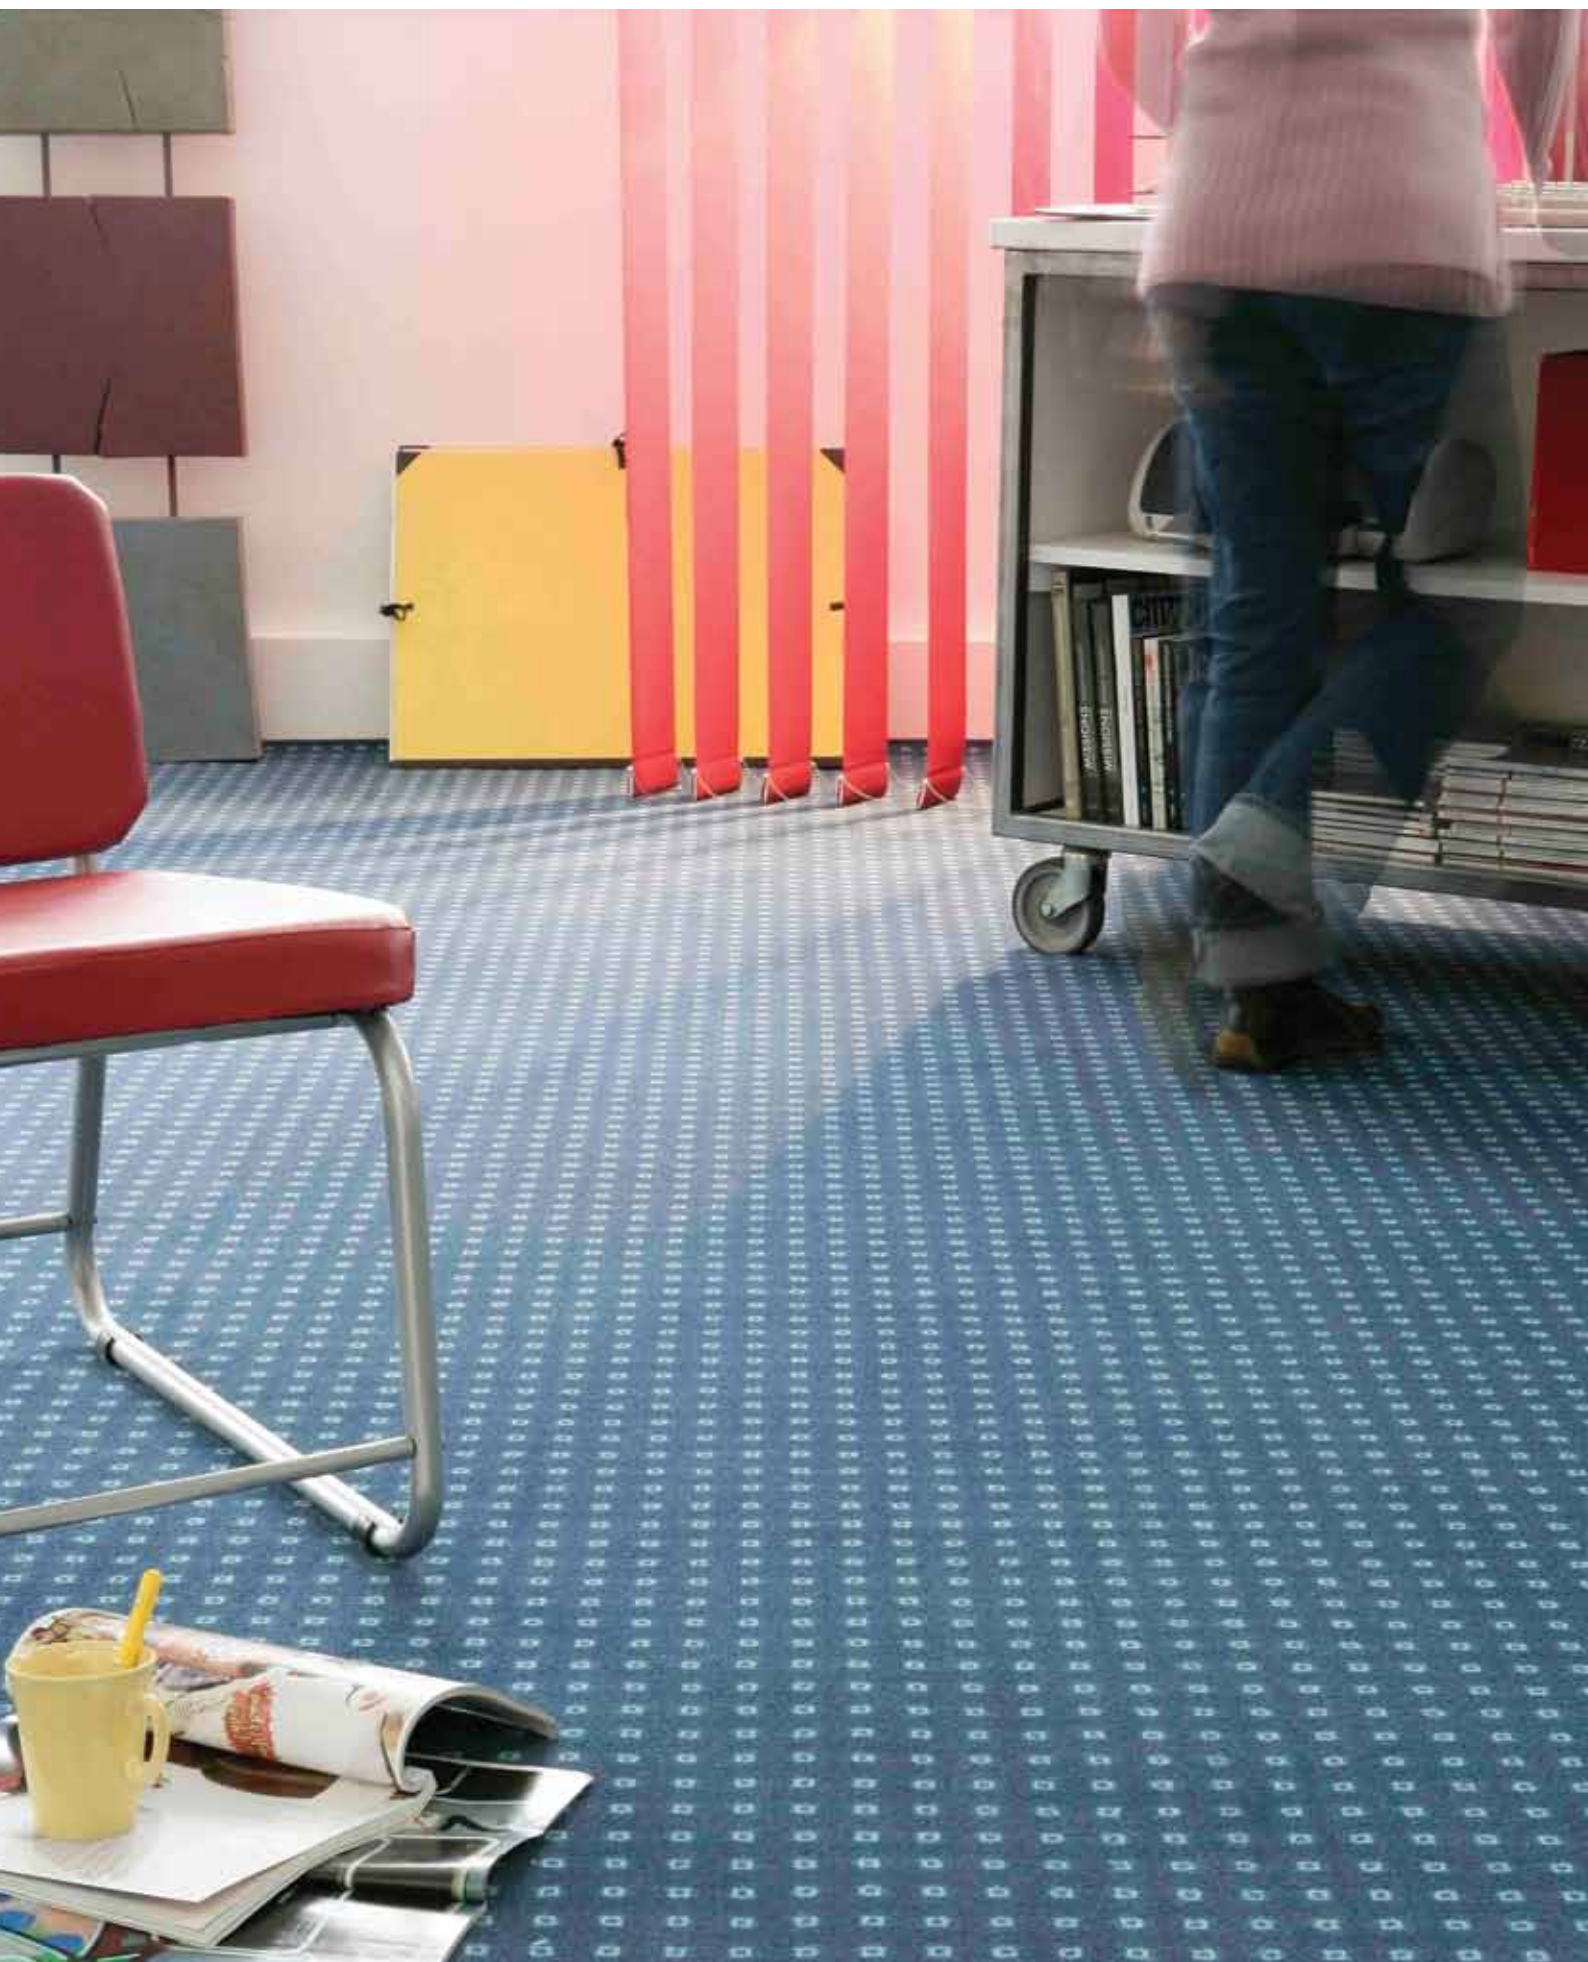

Folio 870

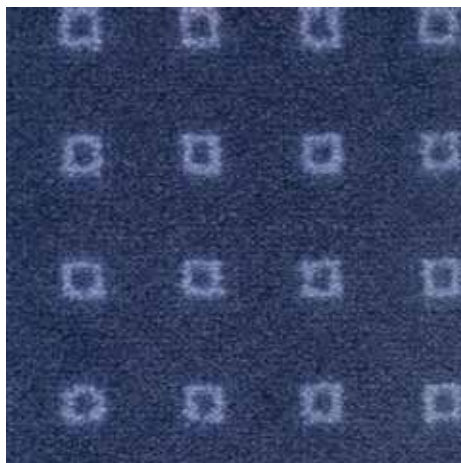

Folio 150



Grain De Cafe 640



Opus 250



Opus 270



Opus 990



Gingko 610



Gingko 450



Gingko 990



Structure	Moquette à velours Saxony imprimé	Envers	Double dossier	Largeur à la pièce	
Construction	Tufted carpet, printed Saxony	Backing	Action back	Width in Roll	
Herstellungsverfahren	Getufteter bedruckter Saxony	Rückenausstattung	Textilrücken	Lieferbreite in Rolle	
Fabricagemetode	BGetuft tapijt, bedrukte Saxony	Rug	Textielrug	Rolbreedte	4m
Descripción	Moqueta tapijt, bedrukte Saxony	Soporte	Doble soporte textil	Ancho por pieza	
Struttura	Moquette velluto Saxony stampato	Sottofondo	Doppio supporto	Larghezza rotolo	
Struktura	Wykładzina o runie typu welur Saksonski drukowana	Podkład	Action back	Szerokosc w rolce	
Composition	100% Polyamide	Comportement au feu	Cfl-s1 - collé sur ciment	Largeur à la coupe	
Pile material	100% Polyamid	Fire resistance	Cfl-s1 - glued on cement	Width in Cut-length	
Polmaterial	100% Polyamid	Brennverhalten	Cfl-s1 - geklebt auf Zement	Lieferbreite in Coupon	
Poolmateriaal	100% Polyamide	Brandgedrag	Cfl-s1 - verlijmd op cement	Couponbreedte	4m
Composición	100% Poliamida	Clasificación al fuego	Cfl-s1 - pegado en cemento	Ancho por trozo	
Composizione	100% Poliammide	Comportamento al fuoco	Cfl-s1 - incollato su cemento	Larghezza taglio	
Sklad runa	100% Poliamid	Trudnozapalnosc	Cfl-s1 - klejone na podlozu betonowym	Szerokosc w kuponie	
Poids de velours		Classement		Nombre de coloris	
Pile weight		Wear Classification	U3SP3E1C0	Colours	
Poleinsatzgewicht		Beanspruchung	Classe 33 LC4	Erhältliche Farben	
Poolinzetmassa	1200 g/m²	Gebruiksklasse	PRODIS N° A1EB44F4	Kleurenaantal	10
Peso fibra		Clasificación	GUT N° 23555	Cantidad de colores	
Peso felpa		Classificazioni	AgBB N° Z 156 601 591	Numero colori	
Gramatura		Klasyfikacja		Liczba kolorow	
Poids total - NF ISO 8543		HQE	Ce produit répond parfaitement à 8 des 14 cibles	Pose / Entretien / Traitement	
Total weight		HQE	This product meets perfectly 8 from the 14 targets	Laying / Cleaning / Treatment	
Gesamtgewicht	2285 g/m²	HQE	Dieses Produkt erfüllt 8 von den 14 Zielen	Verlegehinweis / Reinigung / Behandlung	
Totaal gewicht		HQE	Dit product beantwoordt aan 8 van de 14 doelstellingen.	Plaatsinstructie / Reiniging / Onderhoud	www.balsan.com
Peso total		HQE	Este producto responde perfectamente a 8 de los 14 objetivos	Instalación / Mantenimiento / Tratamiento	
Peso totale		HQE	Questo prodotto risponde perfettamente a 8 di 14 target	Posa / Manutenzione / Trattamenti	
Masa całkowita		HQE	Ten produkt odpowiada 8 z 14 kryteriow	Układanie / Utrzymanie w czystosci / Impregnacja	
Epaisseur totale - NF ISO 1765		Isolation aux bruits d'impacts - NF EN ISO 140-8			
Total thickness		Impact sound insulation			
Gesamtdicke		Trittschalldämmung			
Totale massa	8,5 mm	Geluidsreductie	ΔLw 29 dB		
Altura total		Aislamiento a los ruidos de impactos			
Spessore totale		Rumore all'impatto			
Wysokosc całkowita		Izolacja halasu uderzeniowego			
Hauteur du velours - NF ISO 1766		Absorption aux bruits aériens - NF EN ISO 11654			
Pile height		Sound absorption			
Polhöhe		Schallabsorptionsgrad			
Poolhoogte	5,8 mm	Geluidsabsorptie	α0 0,25		
Altura fibra		Absorción de los ruidos aéreos			
Spessore felpa		Isolazione acustica			
Wysokosc runa		Pochlanianie dzwieku			
Jauge - Serrage (points) - Densité - NF ISO 1763		f/Hz	125	250	500
Gauge - Rows (points) - Tufts		α 5	0,01	0,07	0,13
Teilung - Stiche (points) - Noppenzahl	1/10			1000	2000
Rijen - Deling (points) - Noppenaantal				0,36	0,50
Galga - Densidad (puntos)	47 p				4000
Scartamento - Serraggio (punti) - Densità felpa	185650 p/m²				0,59
Zaciesnienie - rozstaw igiel (punkty) - Gestosc					