




MMA FLOORING






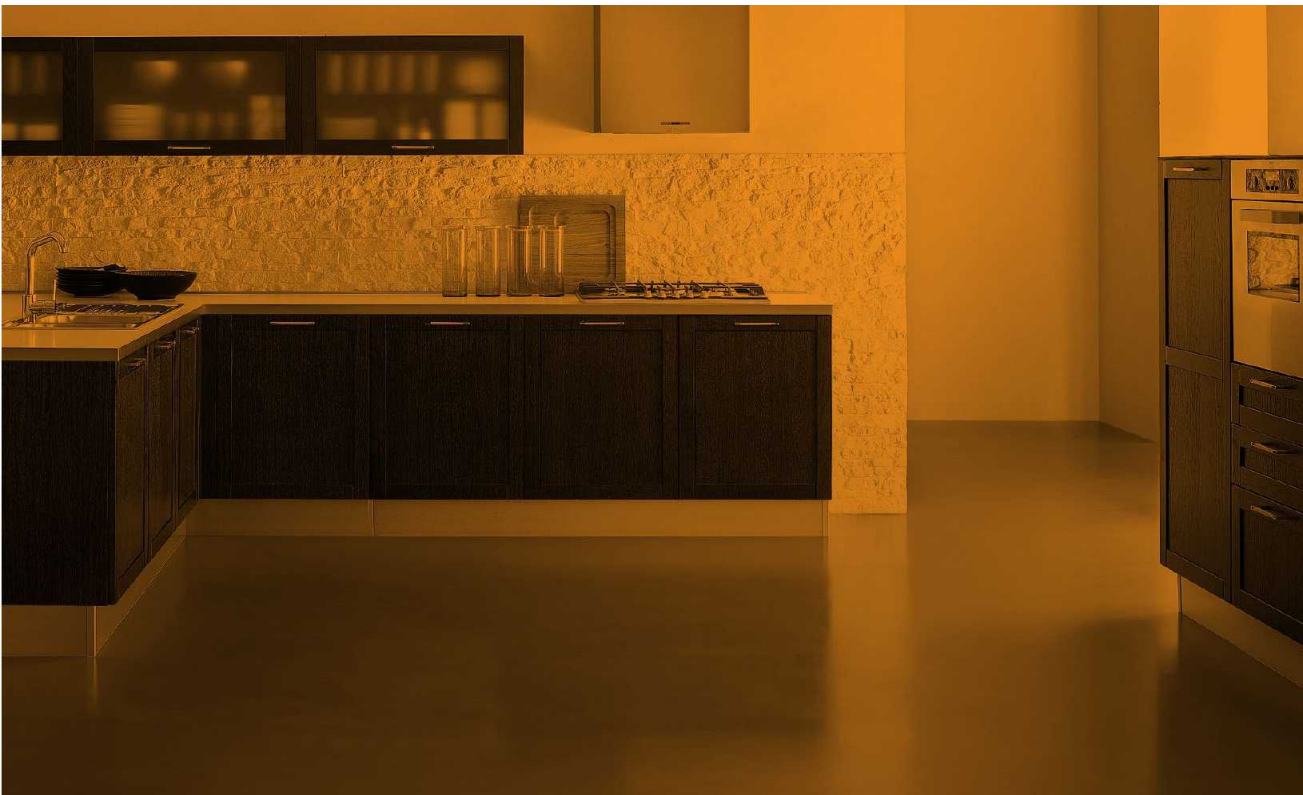


EPOXY & POLYURETHANE RESINS

PROPERTIES	PLEXICOAT MMA RESIN	EPOXY RESIN	POLYURETHANE RESIN
WALK ON FLOORS	15 MINUTES	24 HOURS	24 HOURS
DRY FLOOR	1 HOUR	3 DAYS	3 DAYS
CURED FLOOR	1 HOUR	12-14 DAYS	12-14 DAYS
GO OVER FAILED TILED OR RESIN FLOORS	YES, WILL BOND TO CERAMIC, MARBLE ETC.	NO BOND	NO BOND
CHEMICAL RESISTANCE FOOD ACIDS	EXCELLENT RESISTANCE	VERY POOR	POOR
CHEMICAL RESISTANCE TO ORGANIC ACIDS	EXCELLENT RESISTANCE	POOR RESISTANCE	POOR RESISTANCE
BOND TO STAINLESS STEEL	EXCELLENT BOND	POOR NO BOND	POOR NO BOND
FLEXIBLE PROPERTIES	HIGH FLEXIBILITY	NO FLEXIBILITY	REASONABLE FLEXIBILITY
LOW TEMPERATURES-3.5°	EXCELLENT IN FREEZERS	VERY POOR	POOR
SENSITIVE TO MOISTURE	EXCELLENT TO MOISTURE	REASONABLE TO MOISTURE	VERY POOR TO MOISTURE
THICKNESS	1.5MM-4MM	5MM-10MM	4MM-9MM
100% SEAMLESS FLOOR	100% SEAMLESS	WILL CRACK NO FLEXIBILITY	PIN HOLES DUE TO GAS
WEATHER UV RESISTANCE	EXCELLENT	REASONABLE	OKAY
MUNICIPALITY APPROVED	YES COMPLIES	?	?
GUARANTEE'S	UP TO 20 YEARS	PRODUCT ONLY ?	PRODUCT ONLY ?

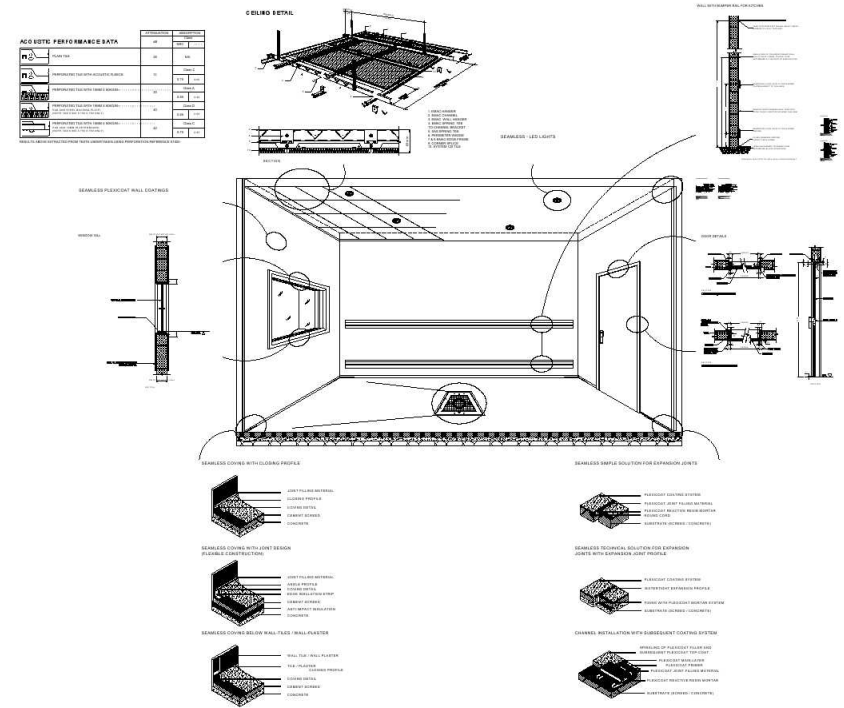




MALLS & RESTAURANTS

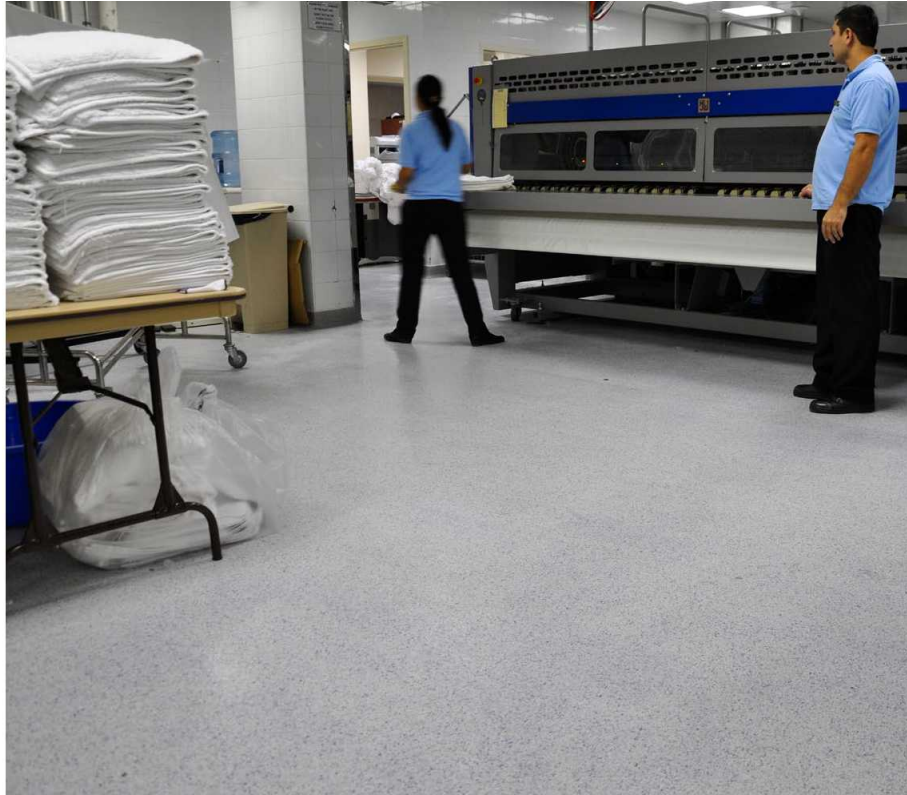

BACK OF HOUSE FLAKES

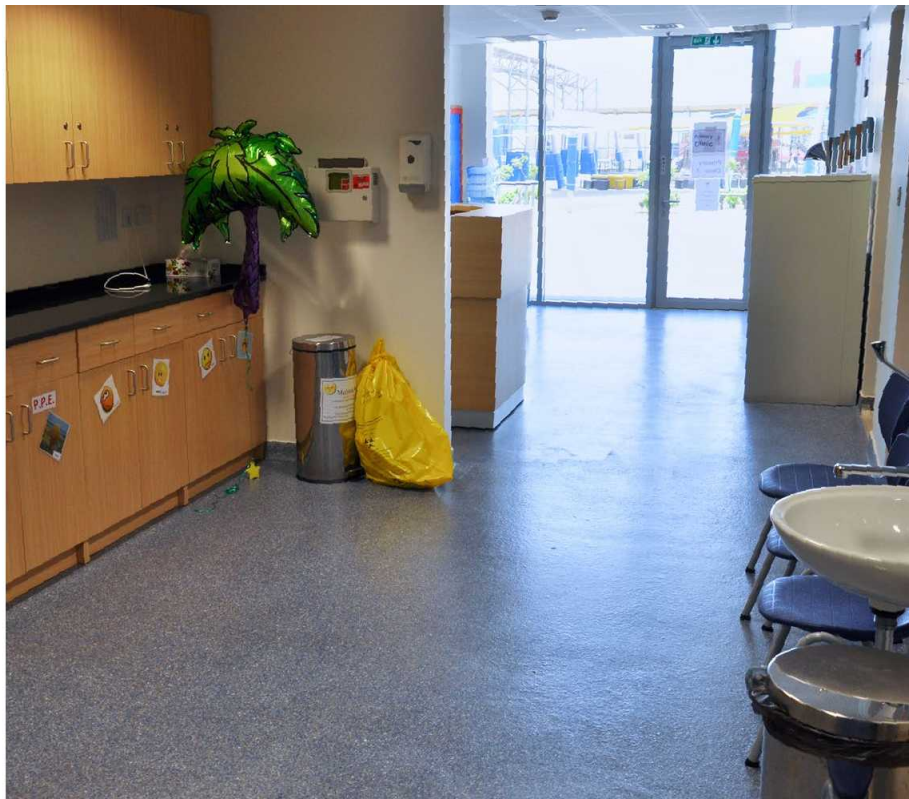


HOSPITALS



HOTELS



SCHOOLS

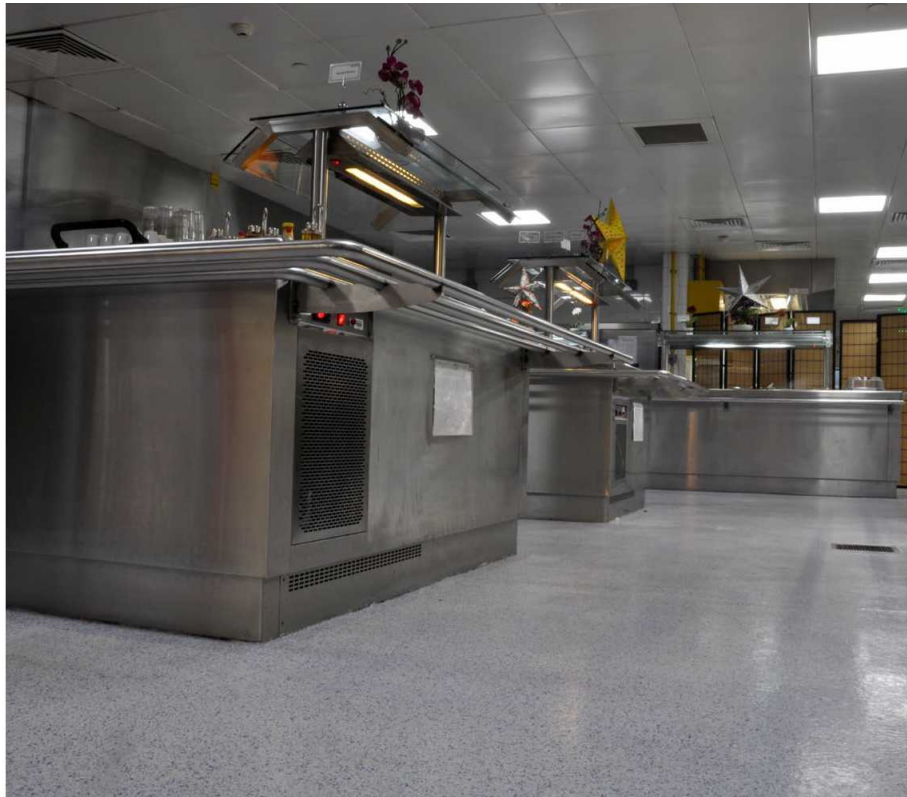

FACTORIES



