





4645 Chiba



4655 Kyoto

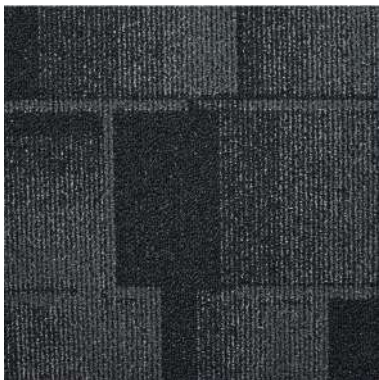

4673 Sendai

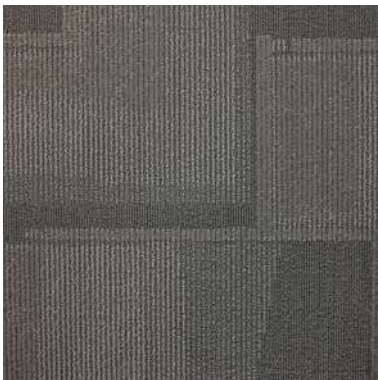

4695 Kobe



## Specification

Construction	:	Scroll Loop Pile
Pile Fiber Composition	:	100% Nylon ( Polyamide 6 )
Yarn Type	:	Bcf
Dye Method	:	Solution Dyed
Pile Weight	:	700 G/m <sup>2</sup>
Number Of Tufts	:	237000/m <sup>2</sup>
Tufting Gauge	:	1/12"
Primary Backing	:	Non-woven
Secondary Backing	:	Stable Shield - 100% Vinyl
Optional Backings	:	Recova –pu Cushion, Eco Shield -100 % Recycled Vinyl
Tile Size	:	50 Cm X 50 Cm (19.6 " X 19.6 ")
Pile Height	:	2.5 Mm - 3.5 Mm
Total Height	:	6.00 Mm
Pile Treatment	:	Invista Anti-soil Treatment, Anti –microbial (Optional)
Recommended	:	Quarter Turn

## PERFORMANCE SPECIFICATION

Wear Classification	Heavy Contract	
Voc Emmision	ASTM D5116-06	<0.5 Mg/m <sup>2</sup> /hour
Flammability	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
Reaction To Fire	EN ISO9239-1:2002	Cfl – S 1
Static Propensity	ISO6356	0.2 Kv
Colour Fastness	AATCC/16	5/5 On Grey Scale
Thermal Resistance	ISO 8302	.04m <sup>2</sup> k/w
Impact Sound Insulation	ISO 140-8	Δlw 23db
Sound Absorption Level	EN ISO 11654	aw: 0.15(H)
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%
Castor Chair Test	DIN 54324	R ≥ 2.4



- Shading or Pile reversal is an inherent attribute of cut pile carpets and not a manufacturing defect
- Color may slightly vary from one dye lot to another dye lot
- Total weight of the product can have a normal variation of ± 5%
- We reserve the right to amend the above specification without prior notice with changes in raw material supplies