LVT Collection | Milliken™



MIXED FORMATIONS 5 MM

WOOD



GOLDEN OAK / GDK204 Beige (Size : 184.15mm x 1219.2mm x 5mm)



GOLDEN OAK / GDK211 Tan (Size : 184.15mm x 1219.2mm x 5mm)




SOFT ALIGNMENT / SAL219 Cream (Size : 184.15mm x 1219.2mm x 5mm)


STONE



Stone / Pure Slab / PSL153 Nickel
(Size : 457.2mm x 914.4mm x 5mm)

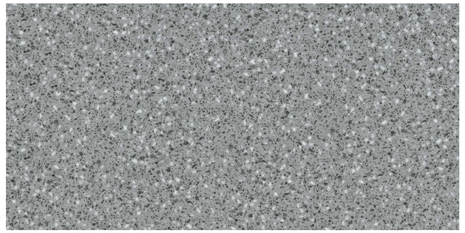

Stone / Close Fragments / CLF13-209-Silver
(Size : 457.2mm x 914.4mm x 5mm)

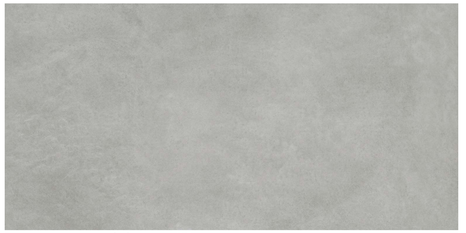

Stone / Pure Slab / PSL217 Taupe
(Size : 457.2mm x 914.4mm x 5mm)



Stone / Pure Slab / PSL219-Dove
(Size : 457.2mm x 914.4mm x 5mm)



Stone / Open Fragments / OPF250-217-Chrome
(Size : 457.2mm x 914.4mm x 5mm)



Stone / Close Fragments / CLF209-215-Beige
(Size : 457.2mm x 914.4mm x 5mm)

MIXED FORMATIONS 2.5 MM

WOOD



HIGH LIGNMENT / HAT121 Caramel (Size : 184.15mm x 1219.2mm x 2.5mm)



GUNNISON / GUN 121-204-220 Beige(A) (Size : 228.6mm x 1524mm x 2.5mm)



GUNNISON / GUN 121-204-220 Beige(B) (Size : 228.6mm x 1524mm x 2.5mm)

STONE



Stone / Close Fragments / CLF209-215-Beige
(Size : 457.2mm x 914.4mm x 2.5mm)

TERRA 2.5 MM


STONE



Firma / FRM215 Pebble
(Size : 457.2mm x 914.4mm x 2.5mm)




Firma / FRM220 Earthtone
(Size : 457.2mm x 914.4mm x 2.5mm)

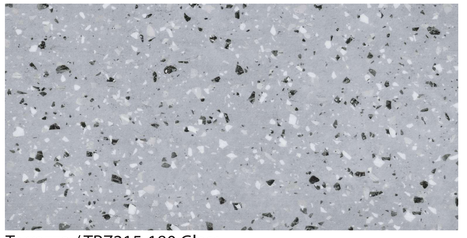

Terrazzo / TRZ215-180 Glass
(Size : 457.2mm x 914.4mm x 2.5mm)

FLEX*FORM*™ LVT CONSTRUCTION



1. **PROGUARD™ REINFORCED POLYURETHANE COATING**
   Integrated surface technology provides best in class scratch & stain resistance, eliminates the need for additional finishes or harsh chemical treatments.
2. **0.55MM TRANSPARENT WEAR LAYER**
   Heavy commercial grade 0.55mm transparent wear layer protects the print visuals and ensures product performs in heavy foot traffic.
3. **DESIGN PHOTOGRAPHIC FILM**
   State of the art printing technology providing authentic visuals and designs.
4. **HIGH DENSITY CORE**
   Ensures excellent durability, stability and long term performance.
5. **GLASS FIBER LAYER**
   Supports dimensional stability.
6. **HIGH DENSITY CORE**
   Ensures excellent durability, stability and long term performance.
7. **VINYL BACKING LAYER**
   Engineered balance layer provides stability and durability of the product.

SPECIFICATION SHEET — DATE:NOV 2021

Mixed Formations- Made of Stone and Wood (5mm)
FlexForm™ LVT

SPECIFICATION		
Construction	High Performance Flex Form LVT	
Finish	ProGuard™ Reinforced Polyurethane Coating	
Overall Thickness	5mm	
Wear Layer Thickness	0.55mm	
Edge Profile	Micro Bevel	
	Made of Stone	Made of Wood
Tile Sizes	18" x 36" / 457.2 x 914.4mm	7.25" x 48" / 184.15mm x 1219.2mm or 9"x60" 228.6mmx1524mm*
Pieces Per Box	6	10 or 6*
Weight Per Box	24.52kg	21.0kg or 20.54kg*
Quantity Per Box	2.51 m²	2.25 m² or 2.09 m

PERFORMANCE	
Critical Radiant Flux (ISO 9239-1)	≥4.5kW/m²
Smoke Rate(ISO 9239-1)	<750%.min
Use Classification (ISO 10582)	Class 33 Heavy Commercial
Colour Fastness to Light (ISO 105-B02)	≥6
Slip Resistance (DIN 51130)	R10
Dimensional Stability (ISO 23999)	≤0.25 % ; Curl ≤2 mm
Resistance to Chemicals (ASTM F925)	Pass
Residual Indentation (ISO 24343-1)	≤0.1 mm
Castor Chair Resistance (ISO 4918)	Pass
Flexibility(ISO 24344)	Pass

WARRANTIES	
15-Year Limited Commercial Wear	
Installation	3RD PARTY CERTIFICATES
Glue Down	

Declare. floorscore GREENGUARD GOLD CERTIFIED ORTHOPHTHALATE FREE*

Milliken LVT is highly durable resilient flooring engineered with the highest quality raw materials to provide unsurpassed performance and enduring aesthetics. Milliken LVT is 100% ortho-phthalate-free. Milliken LVT is manufactured at facilities that are ISO 9001 and ISO 14001 compliant. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Images in this brochure are approximate for color and pattern scale. Please use actual product samples to make your final selections.

SPECIFICATION SHEET — DATE:NOV 2021

Mixed Formations-Made of Stone & Wood / TERRA (2.5 mm)
FlexForm™ LVT

SPECIFICATION		
Construction	High Performance **FLEX***FORM*™ LVT	
Finish	ProGuard™ Reinforced Polyurethane Coating	
Wear Layer Thickness	22 mil (0.55 mm)	
Overall Thickness	2.5mm	
Edge Profile	Micro Bevel	
	Mixed Formations-Made of Stone & Wood	TERRA
Tile Sizes	18" x 36" (457mmx914mm) 7.25"x48" (184.15mm x 1219.2mm) 9"x60" (228.6mm x1524mm)(Gunnison only)	18" x 36" (457mmx914mm) 7.25"x48" (184.15mm x 1219.2mm)
	Made of Stone | Made of Wood	
Pieces Per Box	16/12	
Weight Per Box	16.1kg/22.4kg	
Quantity Per Box	3.59 m² /5.02 m²	

PERFORMANCE	
Critical Radiant Flux (ISO 9239-1)	≥4.5kW/m²
Smoke Rate(ISO 9239-1)	<750% .min
Use Classification (ISO 105-B02)	Class 33 Heavy Commercial
Colour Fadtness to Light （ISO 105-B02）	≥6
Slip Resistance (DIN 51130)	R10
Dimensional Stability (ISO 23999)	≤0.25% ; Curl≤2mm
Resistance to Chemicals(ASTM F925)	Pass
Residual Indentation(ISO 24343-1)	≤0.1mm
Castor Chair Resistance (ISO 4918)	Pass
Flexibility （ISO 24344）	Pass

WARRANTIES	
15-Year Limited Commercial Wear	
Installation	3RD PARTY CERTIFICATES

Glue Down Installation

Herringbone Ashlar Vertical Ashlar Random

Declare. floorscore GREENGUARD GOLD CERTIFIED ORTHOPHTHALATE FREE*

Milliken LVT is highly durable resilient flooring engineered with the highest quality raw materials to provide unsurpassed performance and enduring aesthetics. Milliken LVT is 100% ortho-phthalate-free. Milliken LVT is manufactured at facilities that are ISO 9001 and ISO 14001 compliant. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Images in this brochure are approximate for color and pattern scale. Please use actual product samples to make your final selections.

Customer Service 8621-61455588 | milliken@cpt.com
© 2020 Milliken & Company | Made in China