




NEXUS


NEXUS - 6579 GRAPHITE RUSH

CARPET TILES


NEXUS

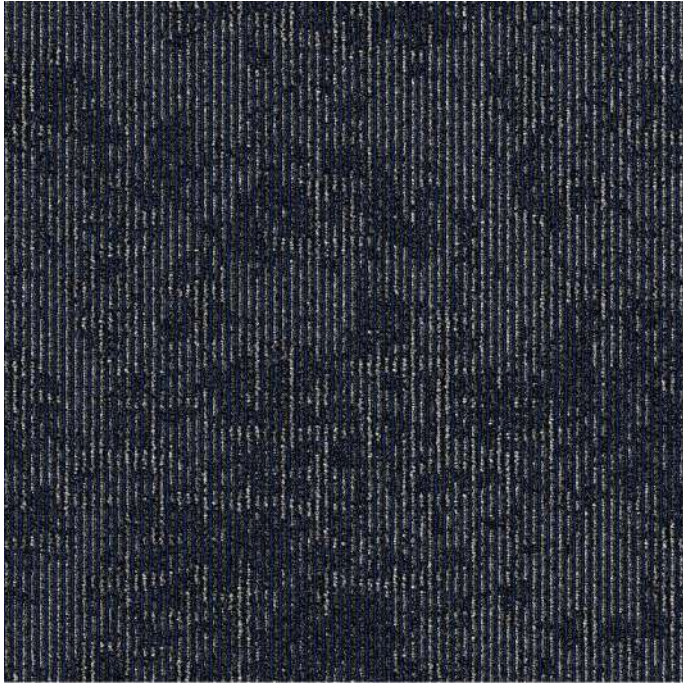


NEXUS - 6554 MIDNIGHT WAVE

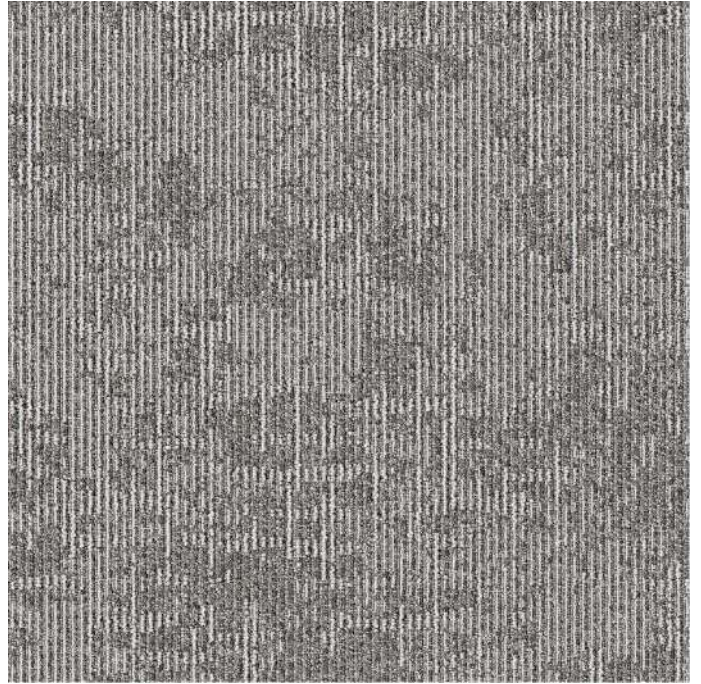

NEXUS - 6573 WHISPERING SAND

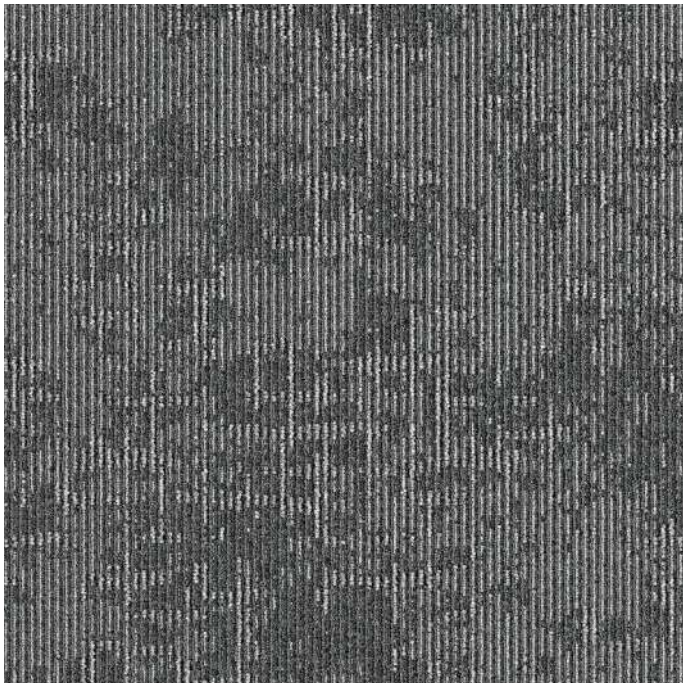

NEXUS - 6577 LUNA GREY

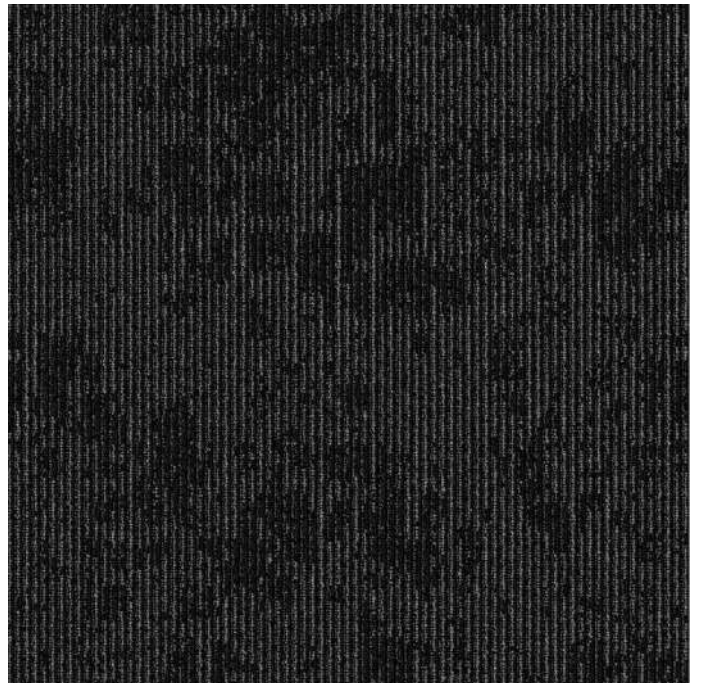

NEXUS - 6579 GRAPHITE RUSH



NEXUS

NEXUS - 6554 MIDNIGHT WAVE

CARPET TILES



NEXUS

NEXUS - 6577 LUNA GREY

CARPET TILES

NEXUS CARPET TILES

SPECIFICATIONS

STYLE NAME	:	NEXUS
CONSTRUCTION	:	SCROLL LOOP PILE
PILE FIBER COMPOSITION	:	100% OLEFIN
YARN TYPE	:	BCF
DYE METHOD	:	SOLUTION DYED
PILE WEIGHT	:	535GM PER SQM ($\pm 5\%$)
PILE HEIGHT	:	3.5 MM
TOTAL HEIGHT	:	6.5 MM
NUMBER OF TUFTS	:	274340/M ²
TUFTING GAUGE	:	1/12 TH
PRIMARY BACKING	:	NON WOVEN
SECONDARY BACKING	:	STABLESHIELD- 100% VINYL
TILE SIZE	:	50 X 50 CM
PACKING	:	20 PCS (5M ²) PER BOX
INSTALLATION METHOD	:	QUARTER TURN

PERFORMANCE PARAMETERS

VOC EMISSION	ASTM D5116-06	<0.5 mg/m ² /hour (CRI GLP)
FLAMMABILITY	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
REACTION TO FIRE	EN ISO 9239-1:2002	Dfl-s1
STATIC PROPENSITY	ISO 6356	0.2 kV
COLOR FASTNESS	AATCC/16	5/5 on Grey Scale
THERMAL RESISTANCE	ISO 8302	.04m2 K/W
IMPACT SOUND INSULATION	ISO 140-8	ΔL_w 23dB
SOUND ABSORPTION LEVEL	EN ISO 11654	α_w : 0.15(H)
SOILING PROPENSITY	ASTM D 6540-00	4
DIMENSIONAL STABILITY	EN 986	< 0.20%
CASTOR CHAIR TEST	DIN 54324	R $\geq$ 2.4

NEXUS - 6573 WHISPERING SAND

