






PERFECTION

LAMINATE FLOORING

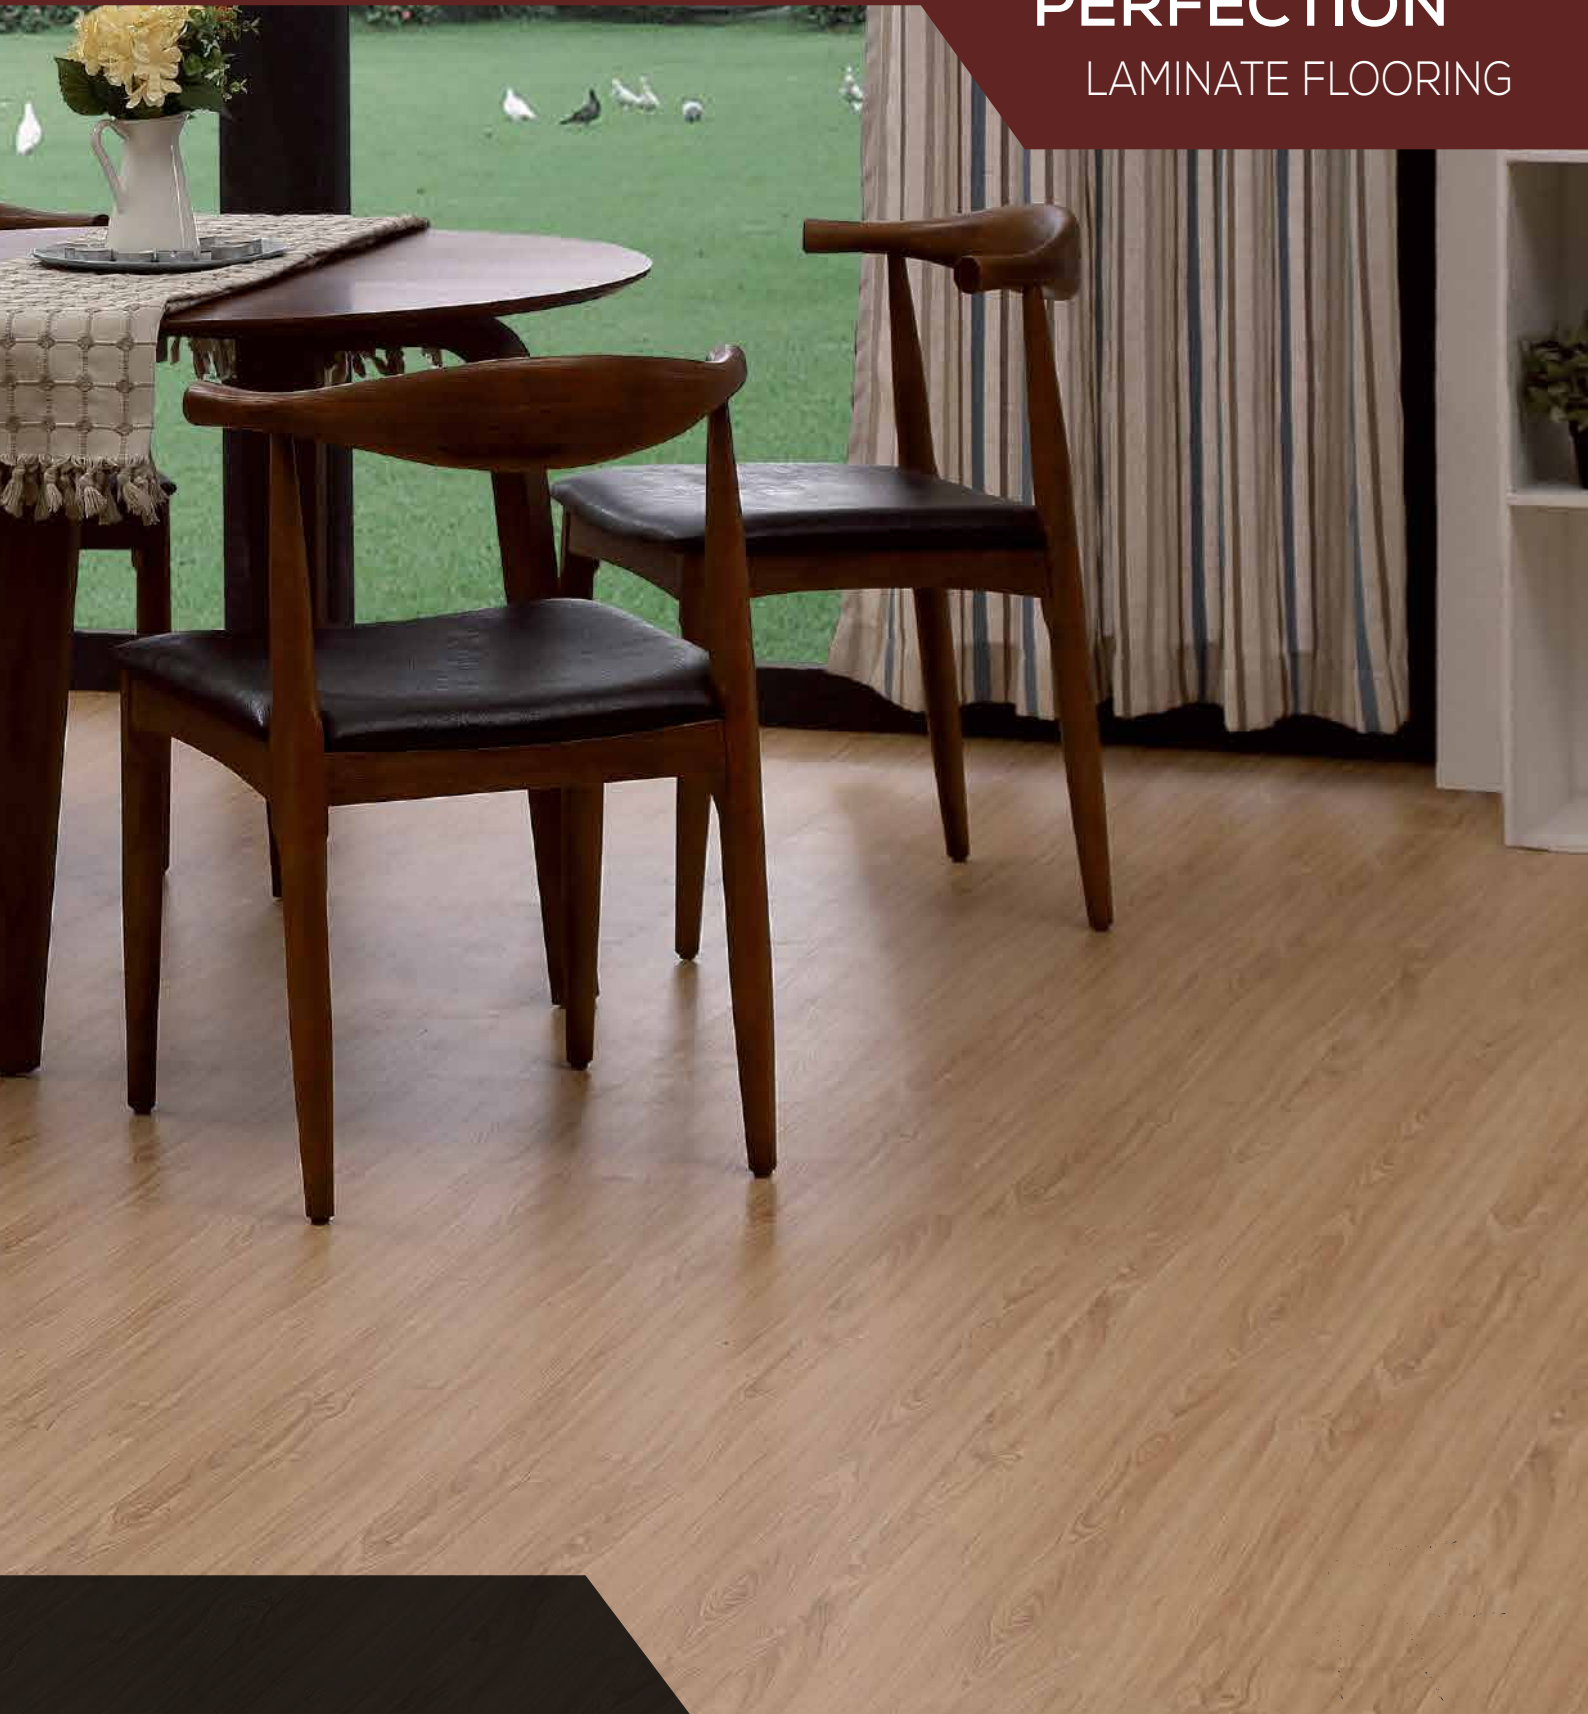


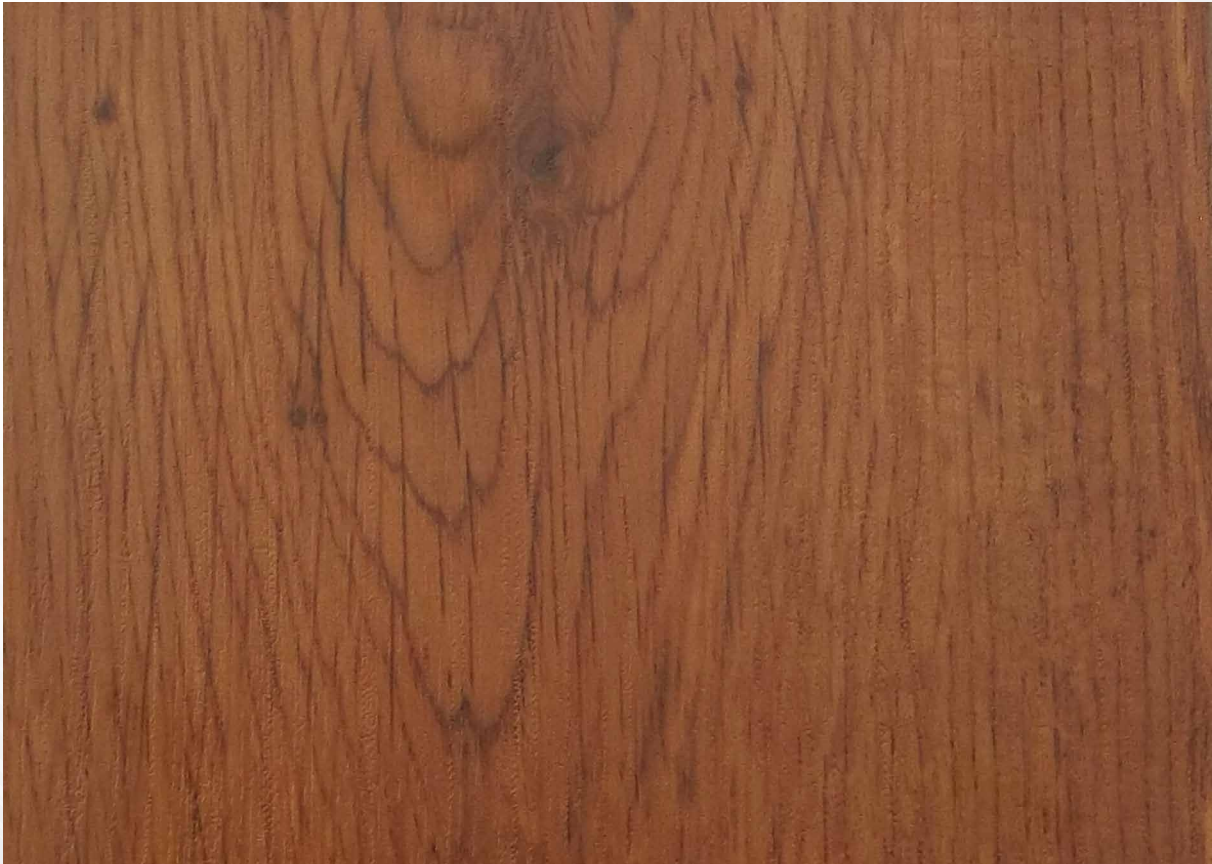


Chestnut 50538

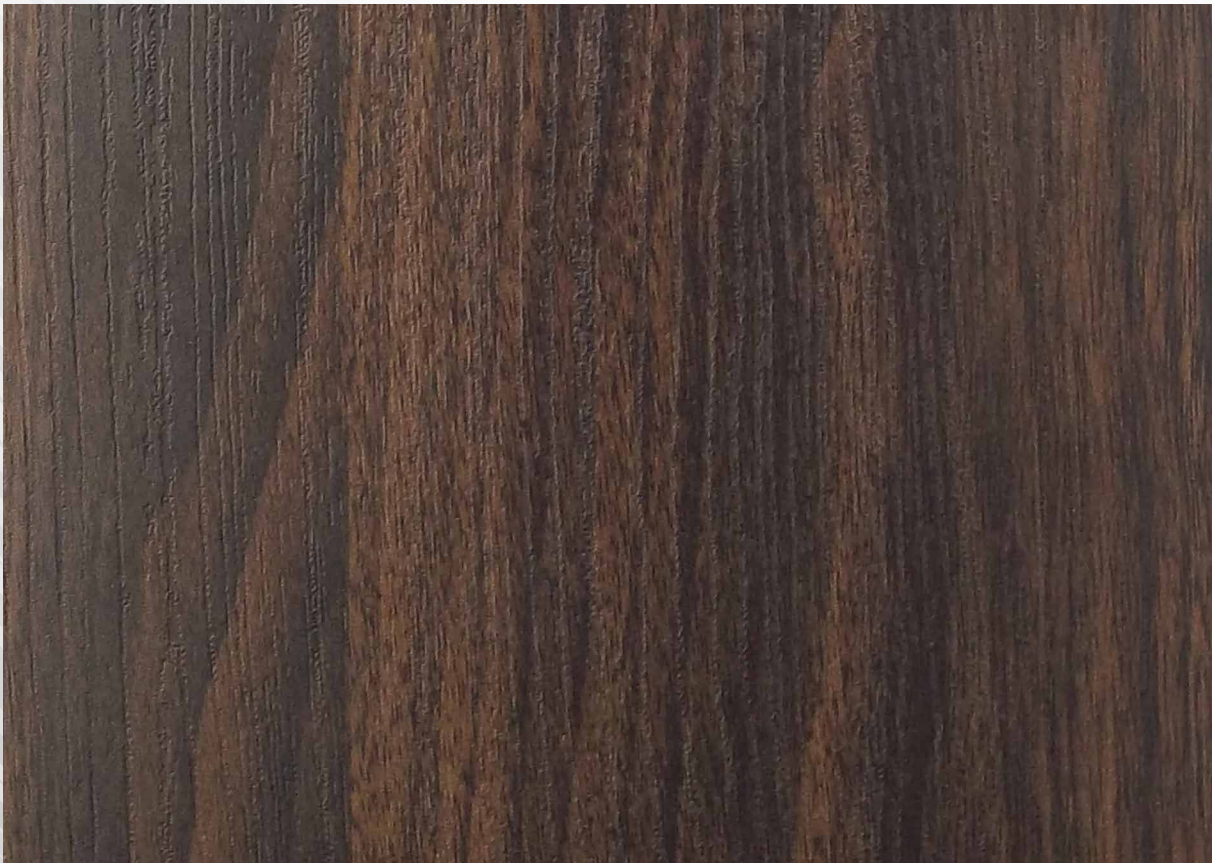


Wenge 1161

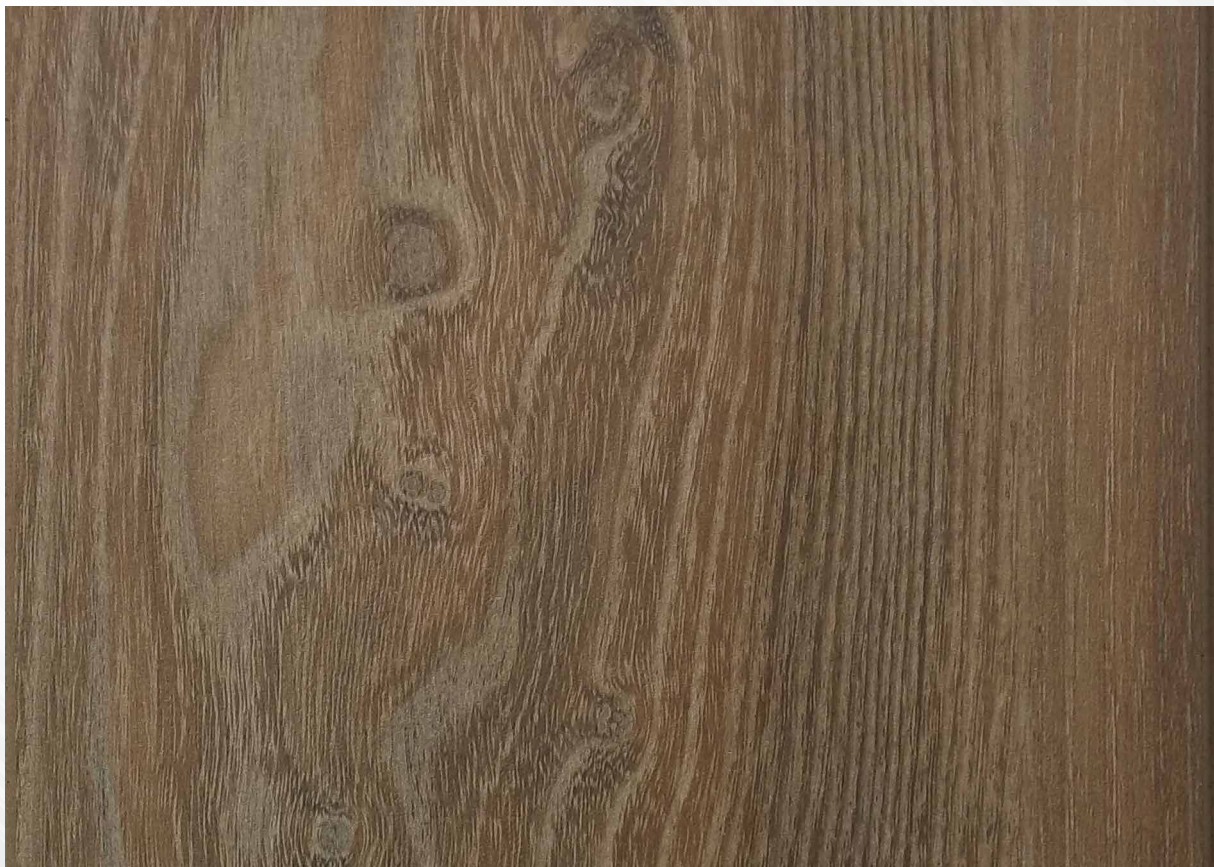

Smoked Oak H-978-3

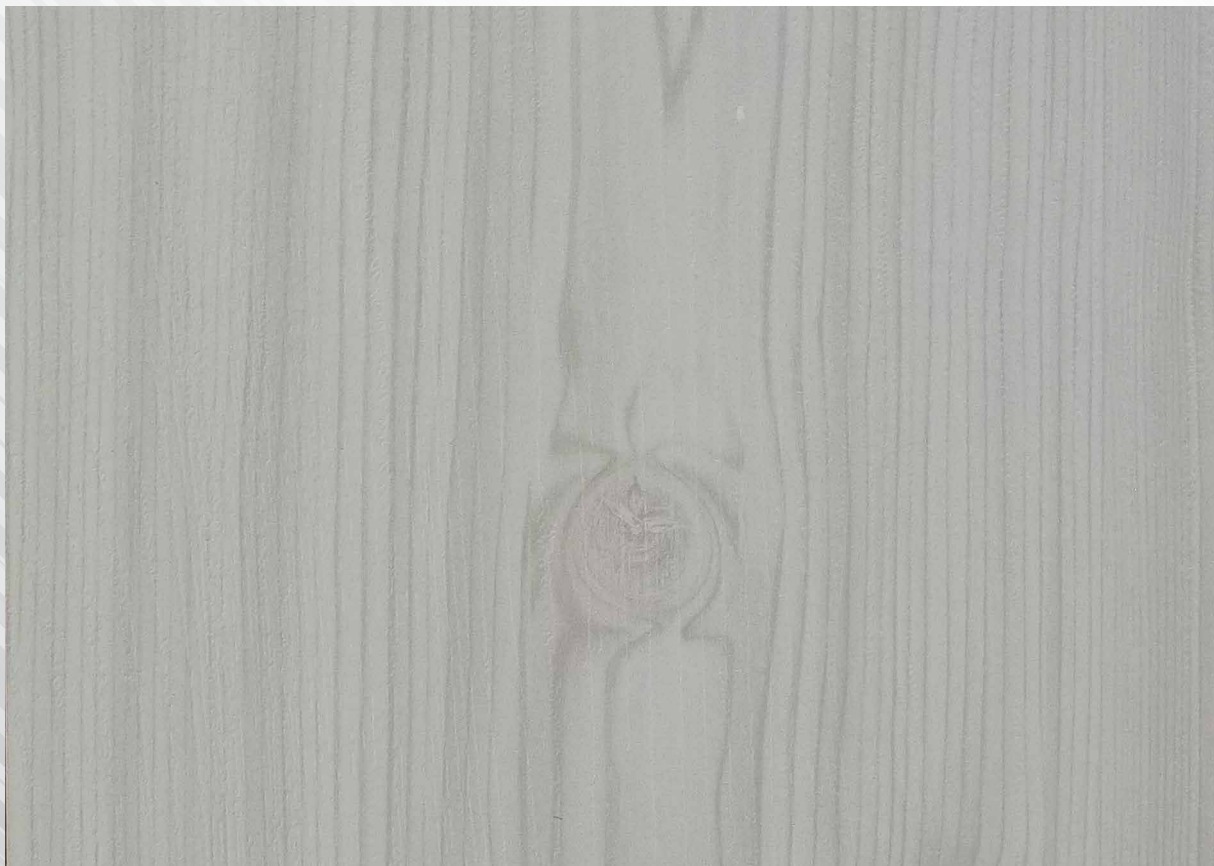

Pearl White JL 70402

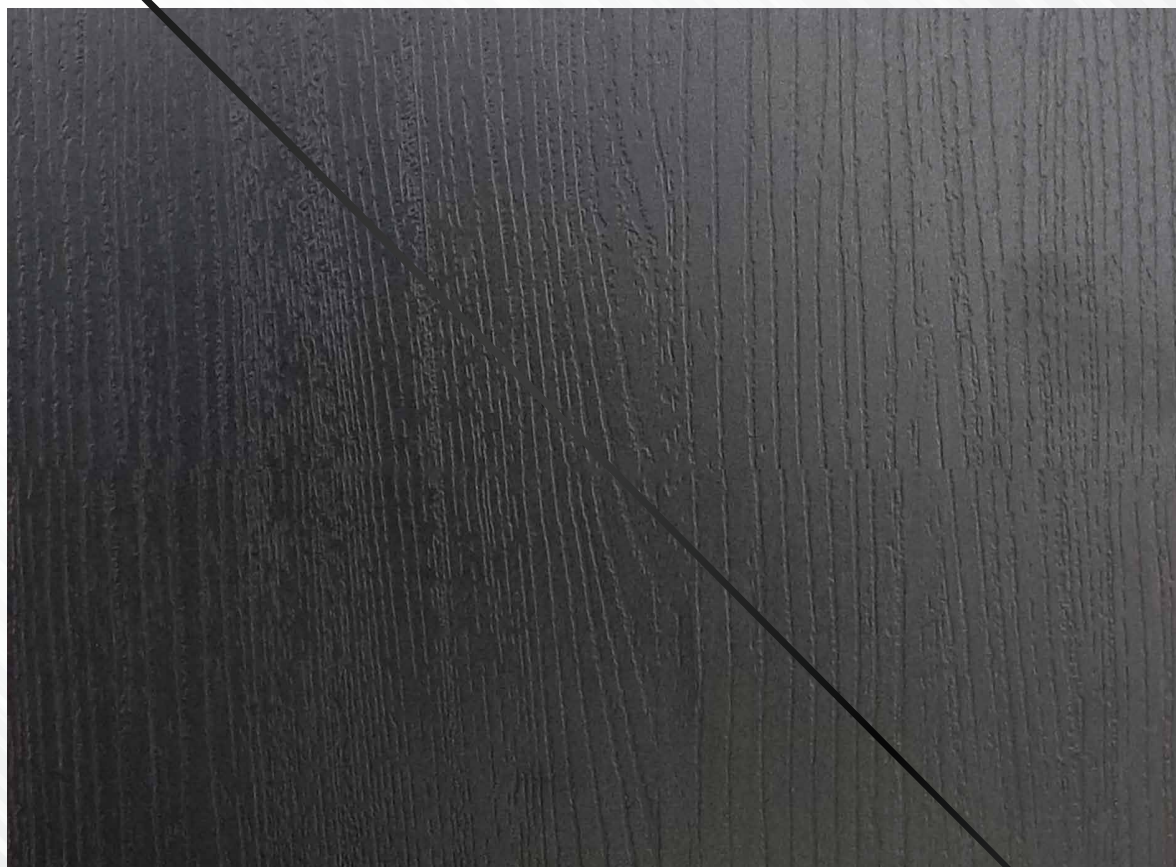

Charcoal H 8017-1



Desert Sand XY-06



8mm-AC3-Class 23/32-4V-Natural / TruWood Structure-Classic Plank

Technical Specification	Norm	Values
Structure Surface		Natural / TruWood
Structural Panel		HDF 850 kg/m3
Thickness		8 mm
Installation Method		Angle & Angle
Packs/Pallet		75
Planks/Pack		8
Plank Dimensions		1215 x197 mm
m2 per pack		1,9148 m2
Weight per Pack		13,0 kg
Class of Use	EN 13329	23/32
Wear Resistance	EN 13329	≥ 2500
Wear Class	EN 13329	AC3
Thickness Swelling	EN 13329	< 12%
Impact Class	EN 13329	IC2
Staining Class	EN 438-2,15	6 (Group 1&2)
Light Fastness	EN 438-2,16	> 6
Burning Cigarette	EN 438-2,18	4
Castor Chairs	EN 425	> 2 N
Slip Resistance	EN 13893	Classe DS
Emission of Formaldehyde	EN 717-2	E1
Reaction to Fire	EN 13501-1	Cfl s1
Thermal Resistance	ISO 8302	0,07 m2. k/w
Underfloor Heating		Suitable

