


POINTE SDN Carpet

Plank (50cm x 100cm)
&
Narrow Plank (25cm x 100cm)



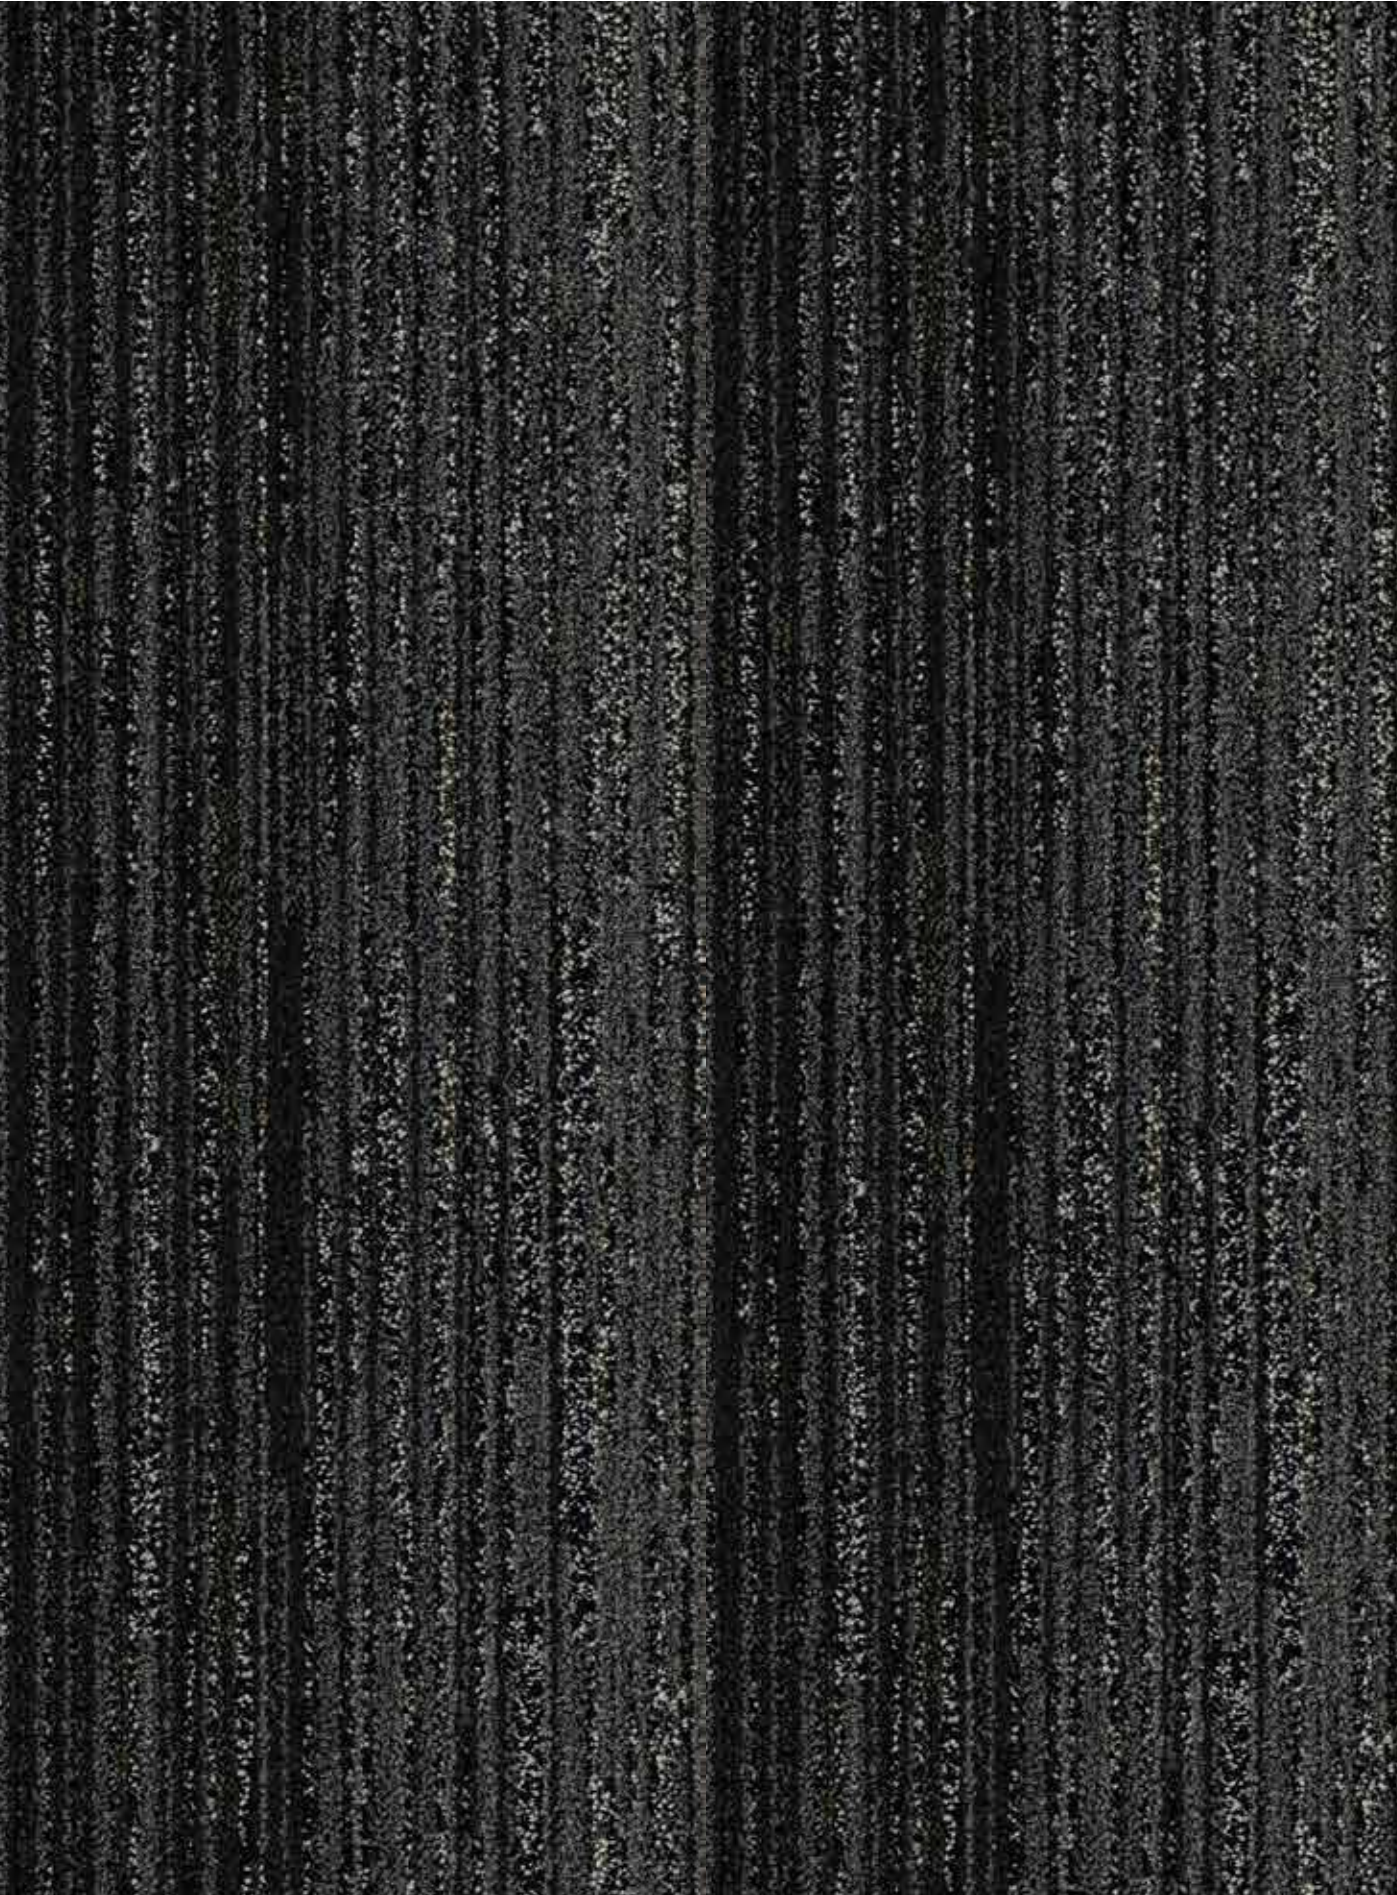

974 Grey






970 Grege



Herringbone

970 Grege

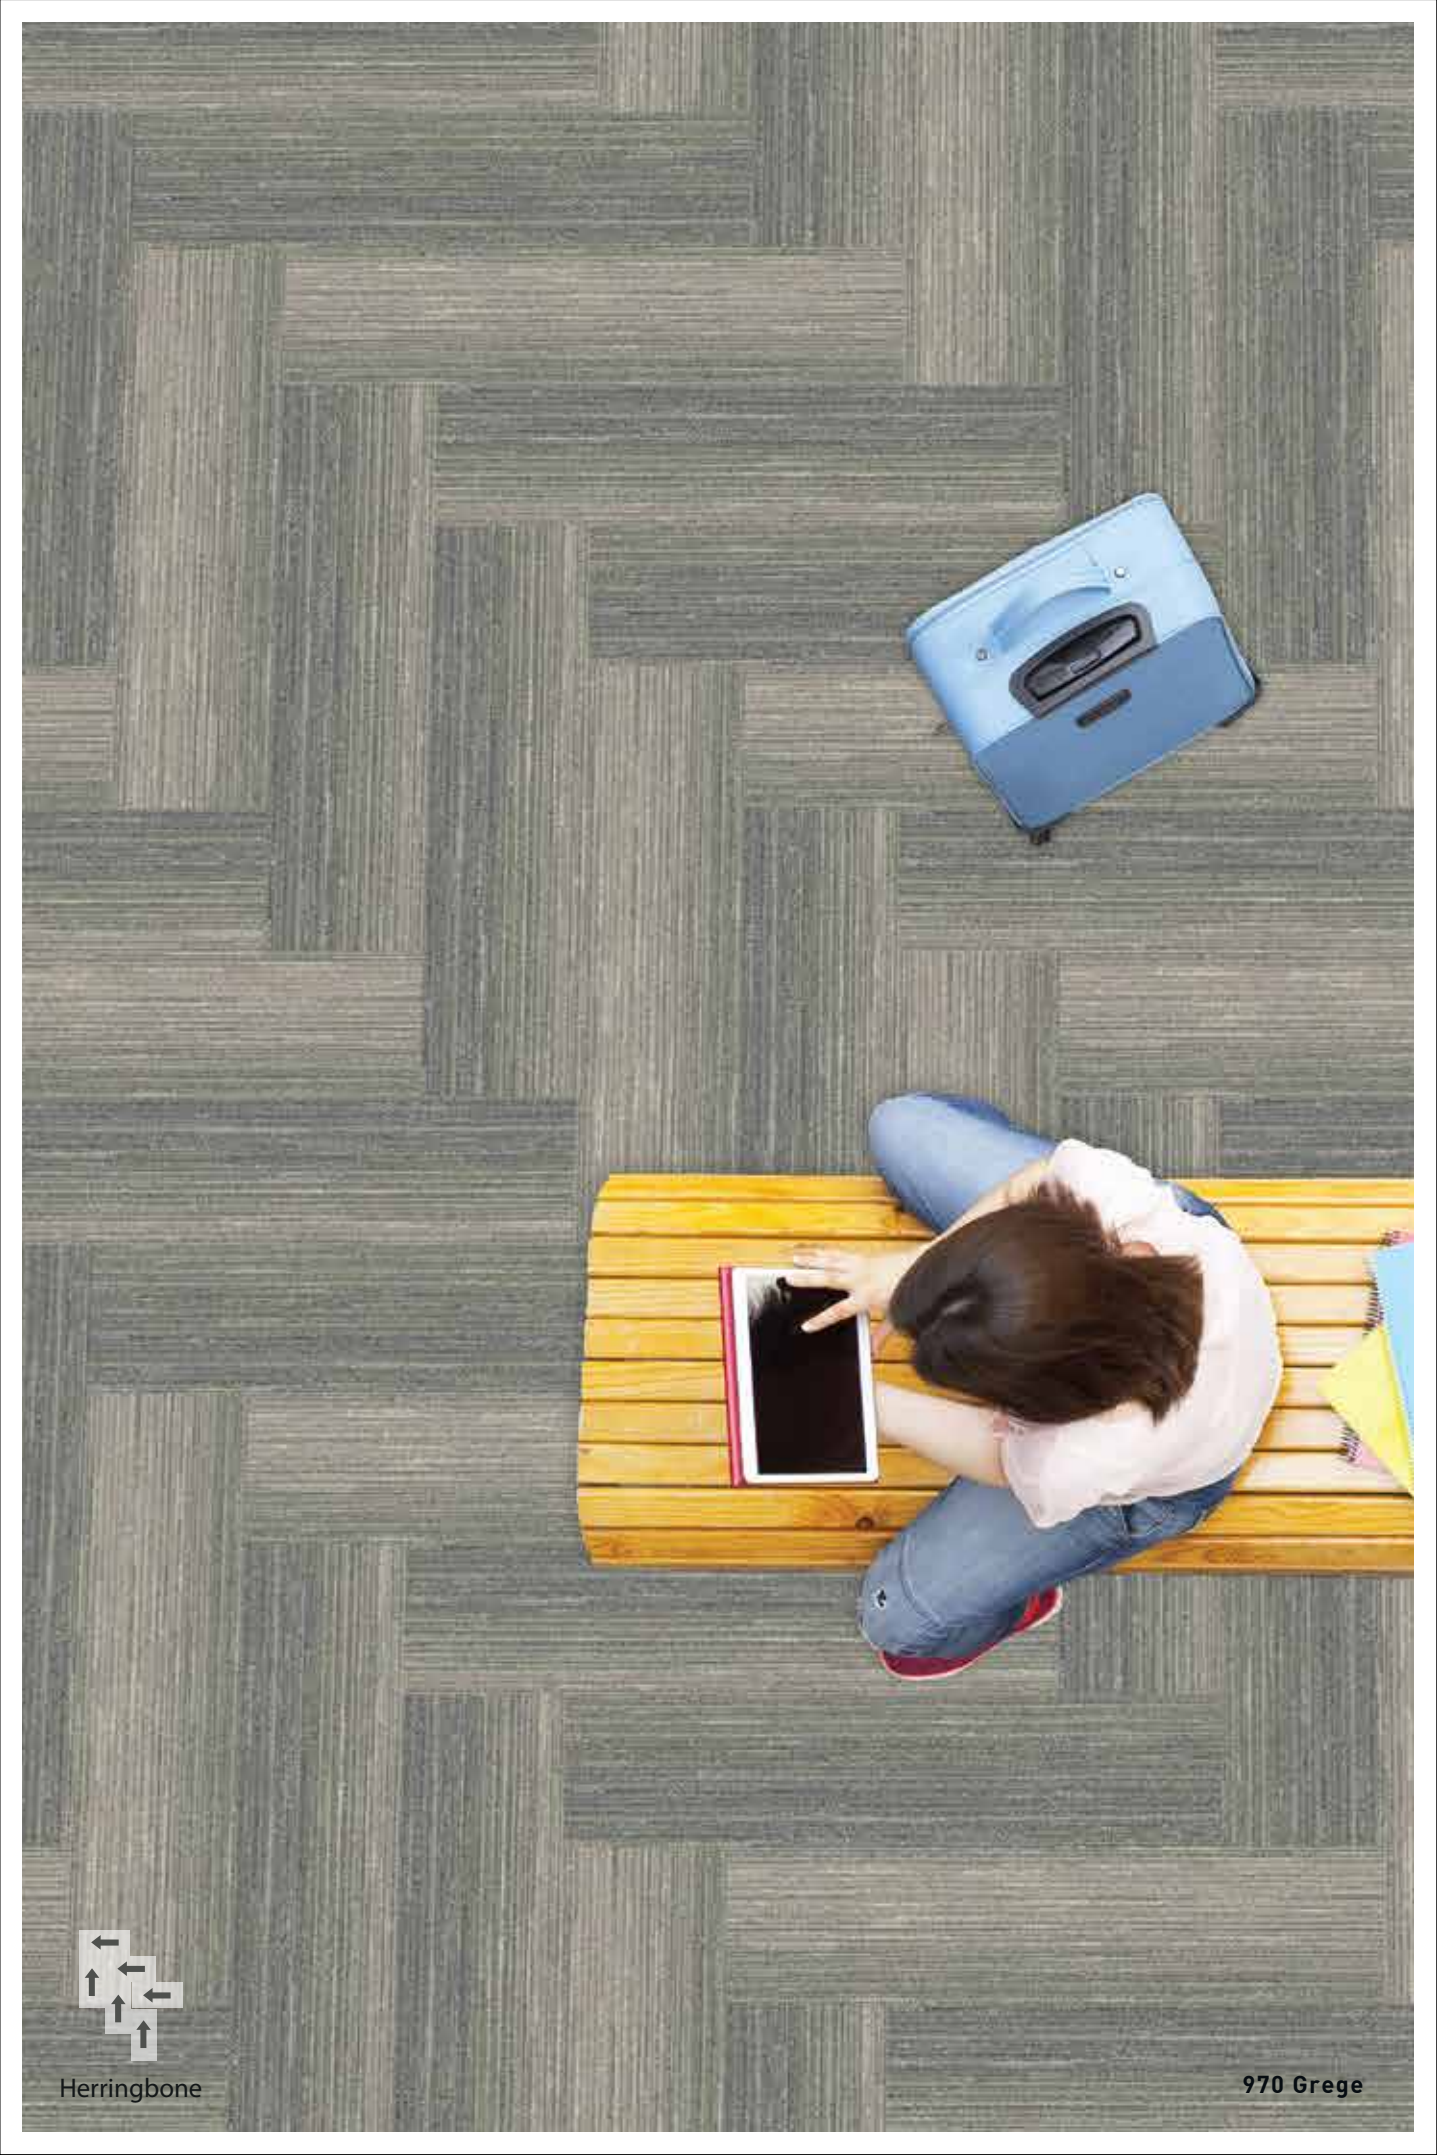

Herringbone

970 Grege

POINTE

25cm
9.8 in
39.2 in
CARPET
NARROW PLANK



50cm
19.6 in
39.2 in
CARPET PLANK



995 Vanilla



Ashlar

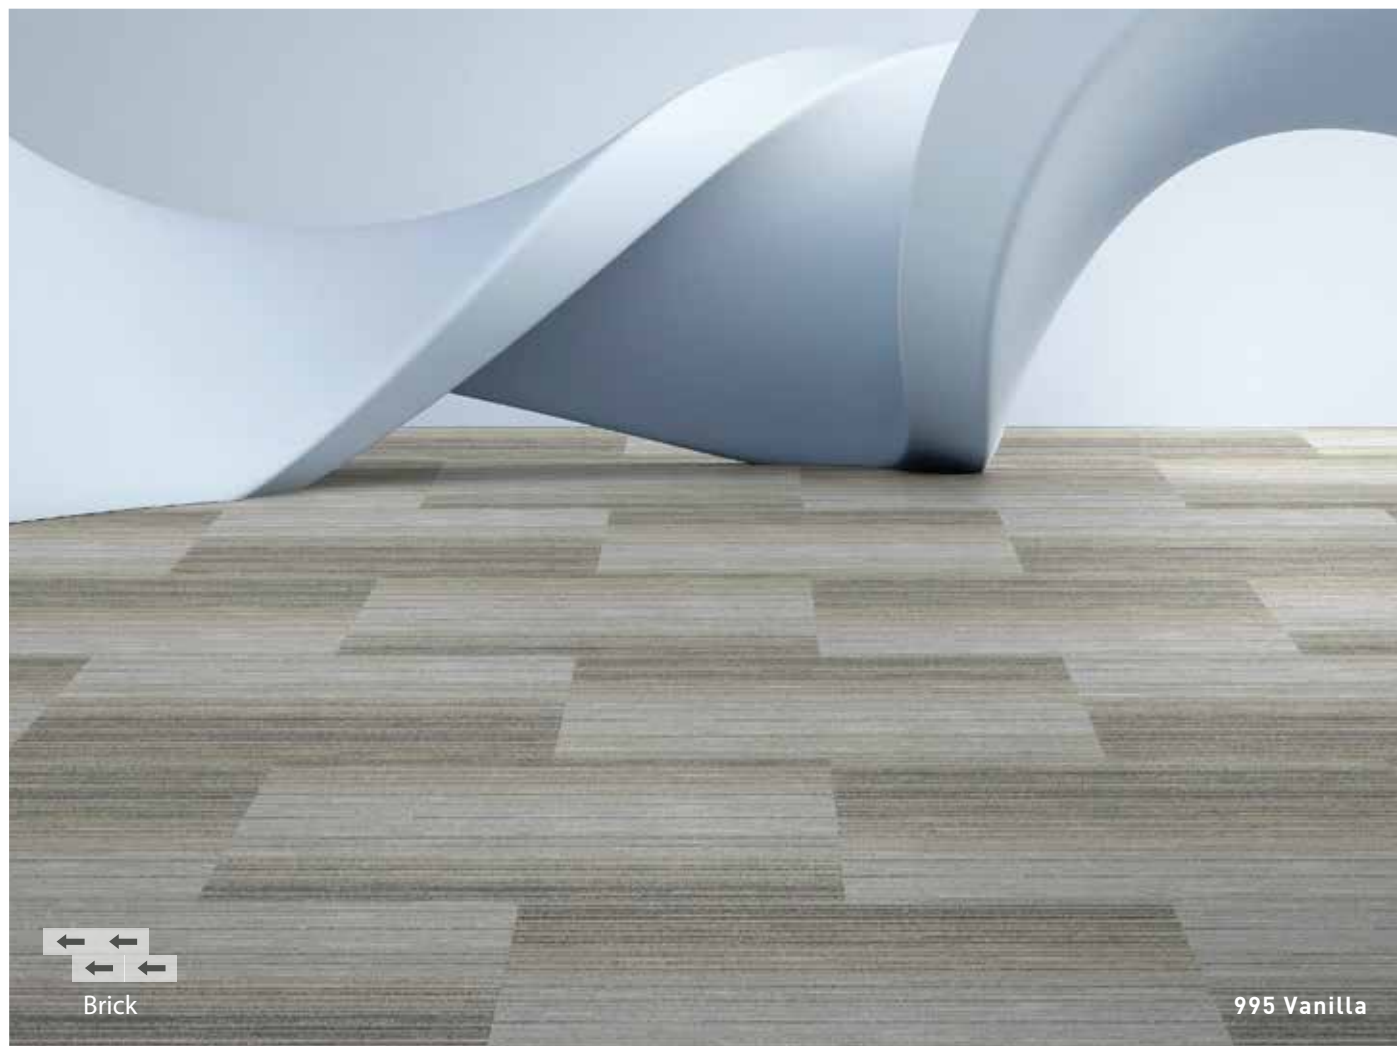


Brick

995 Vanilla





Herringbone

945 Cookies

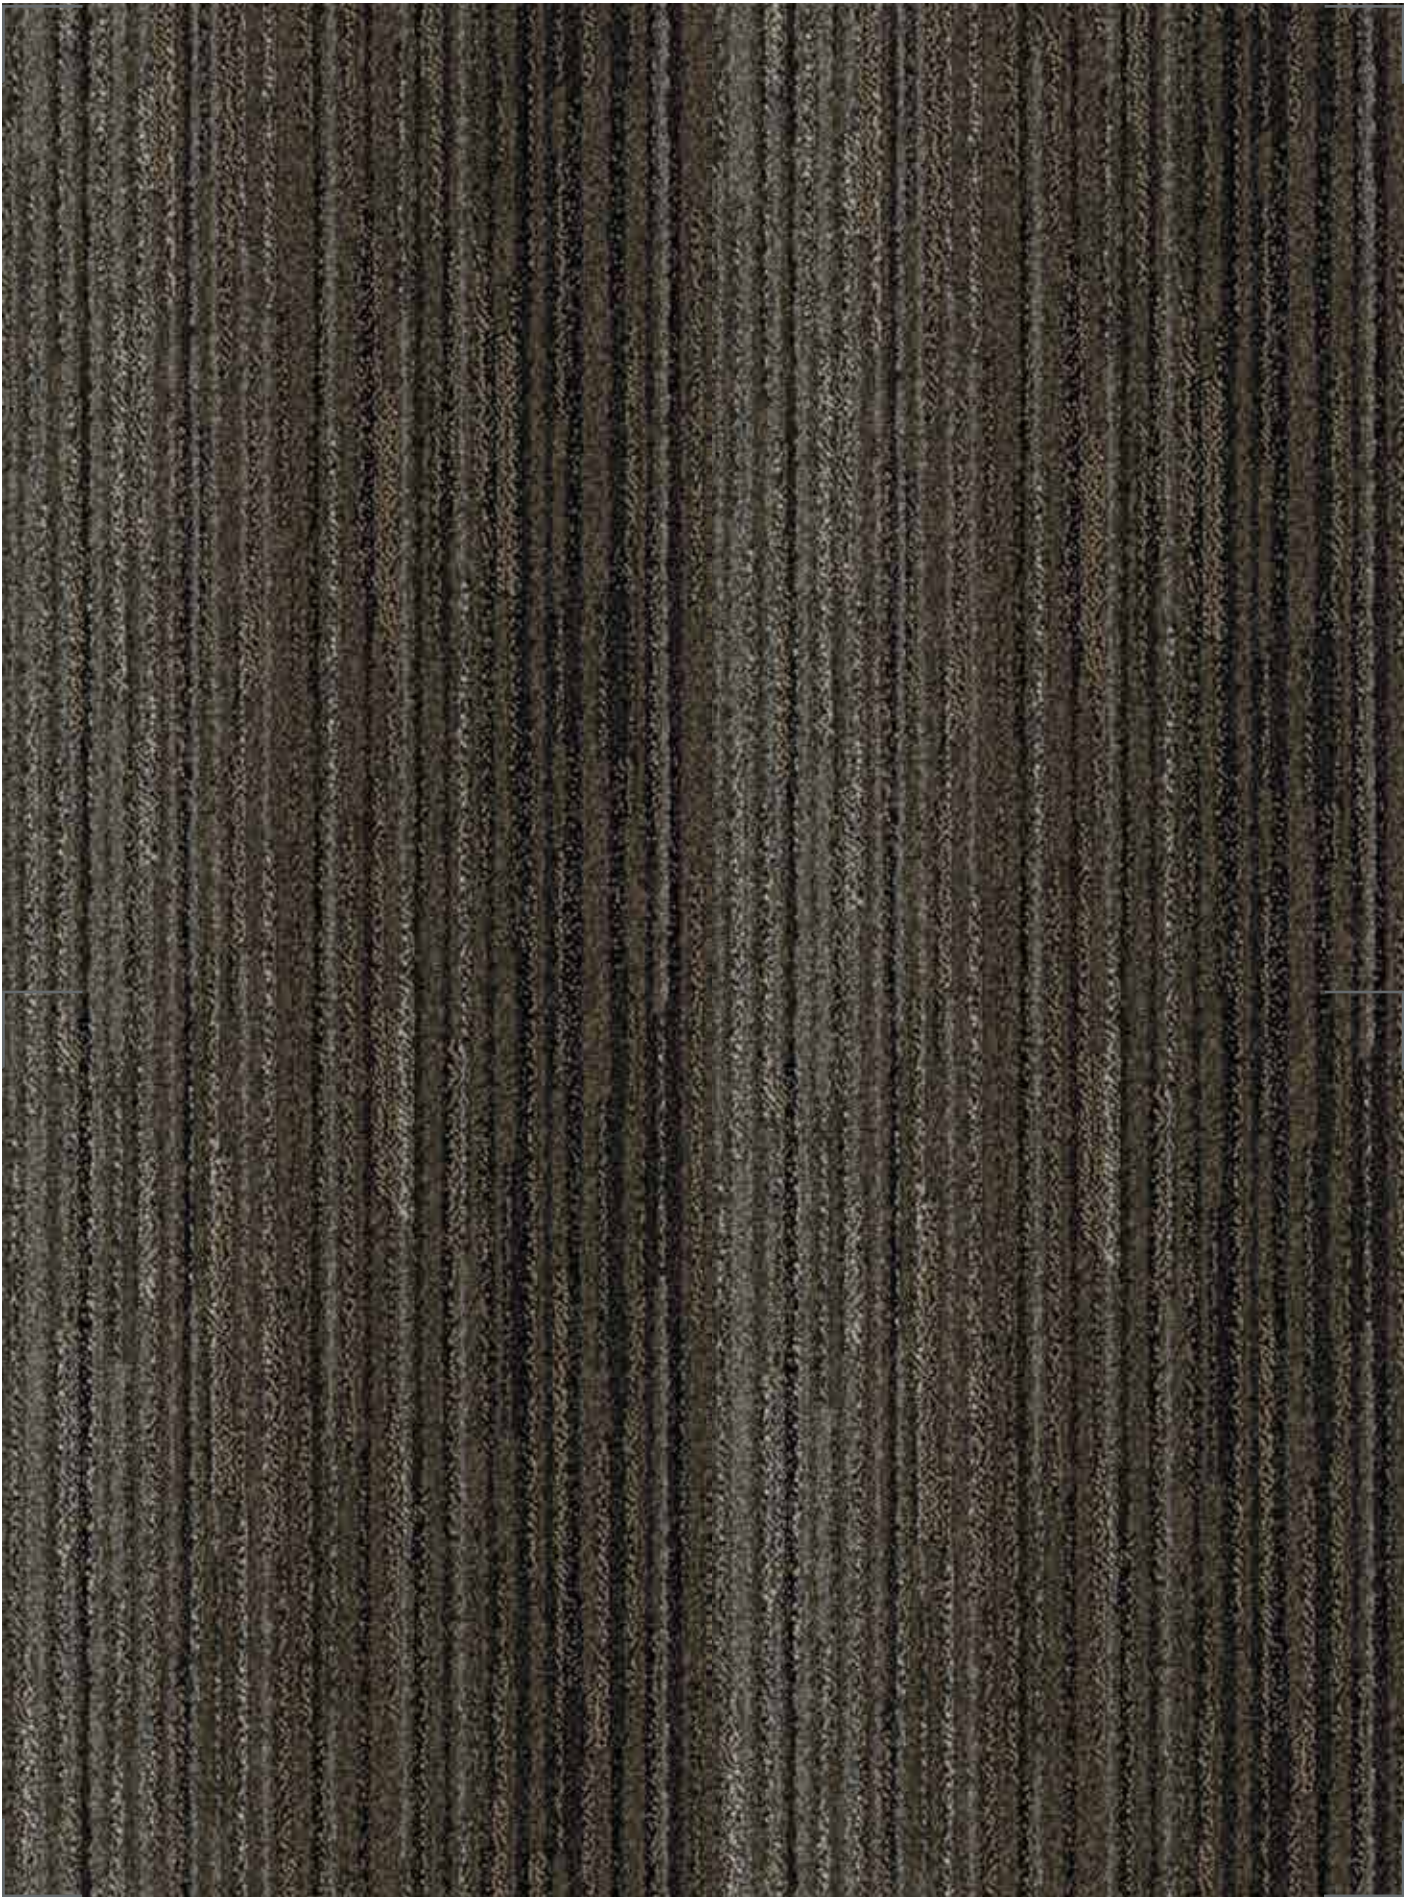

945 Cookies

POINTE

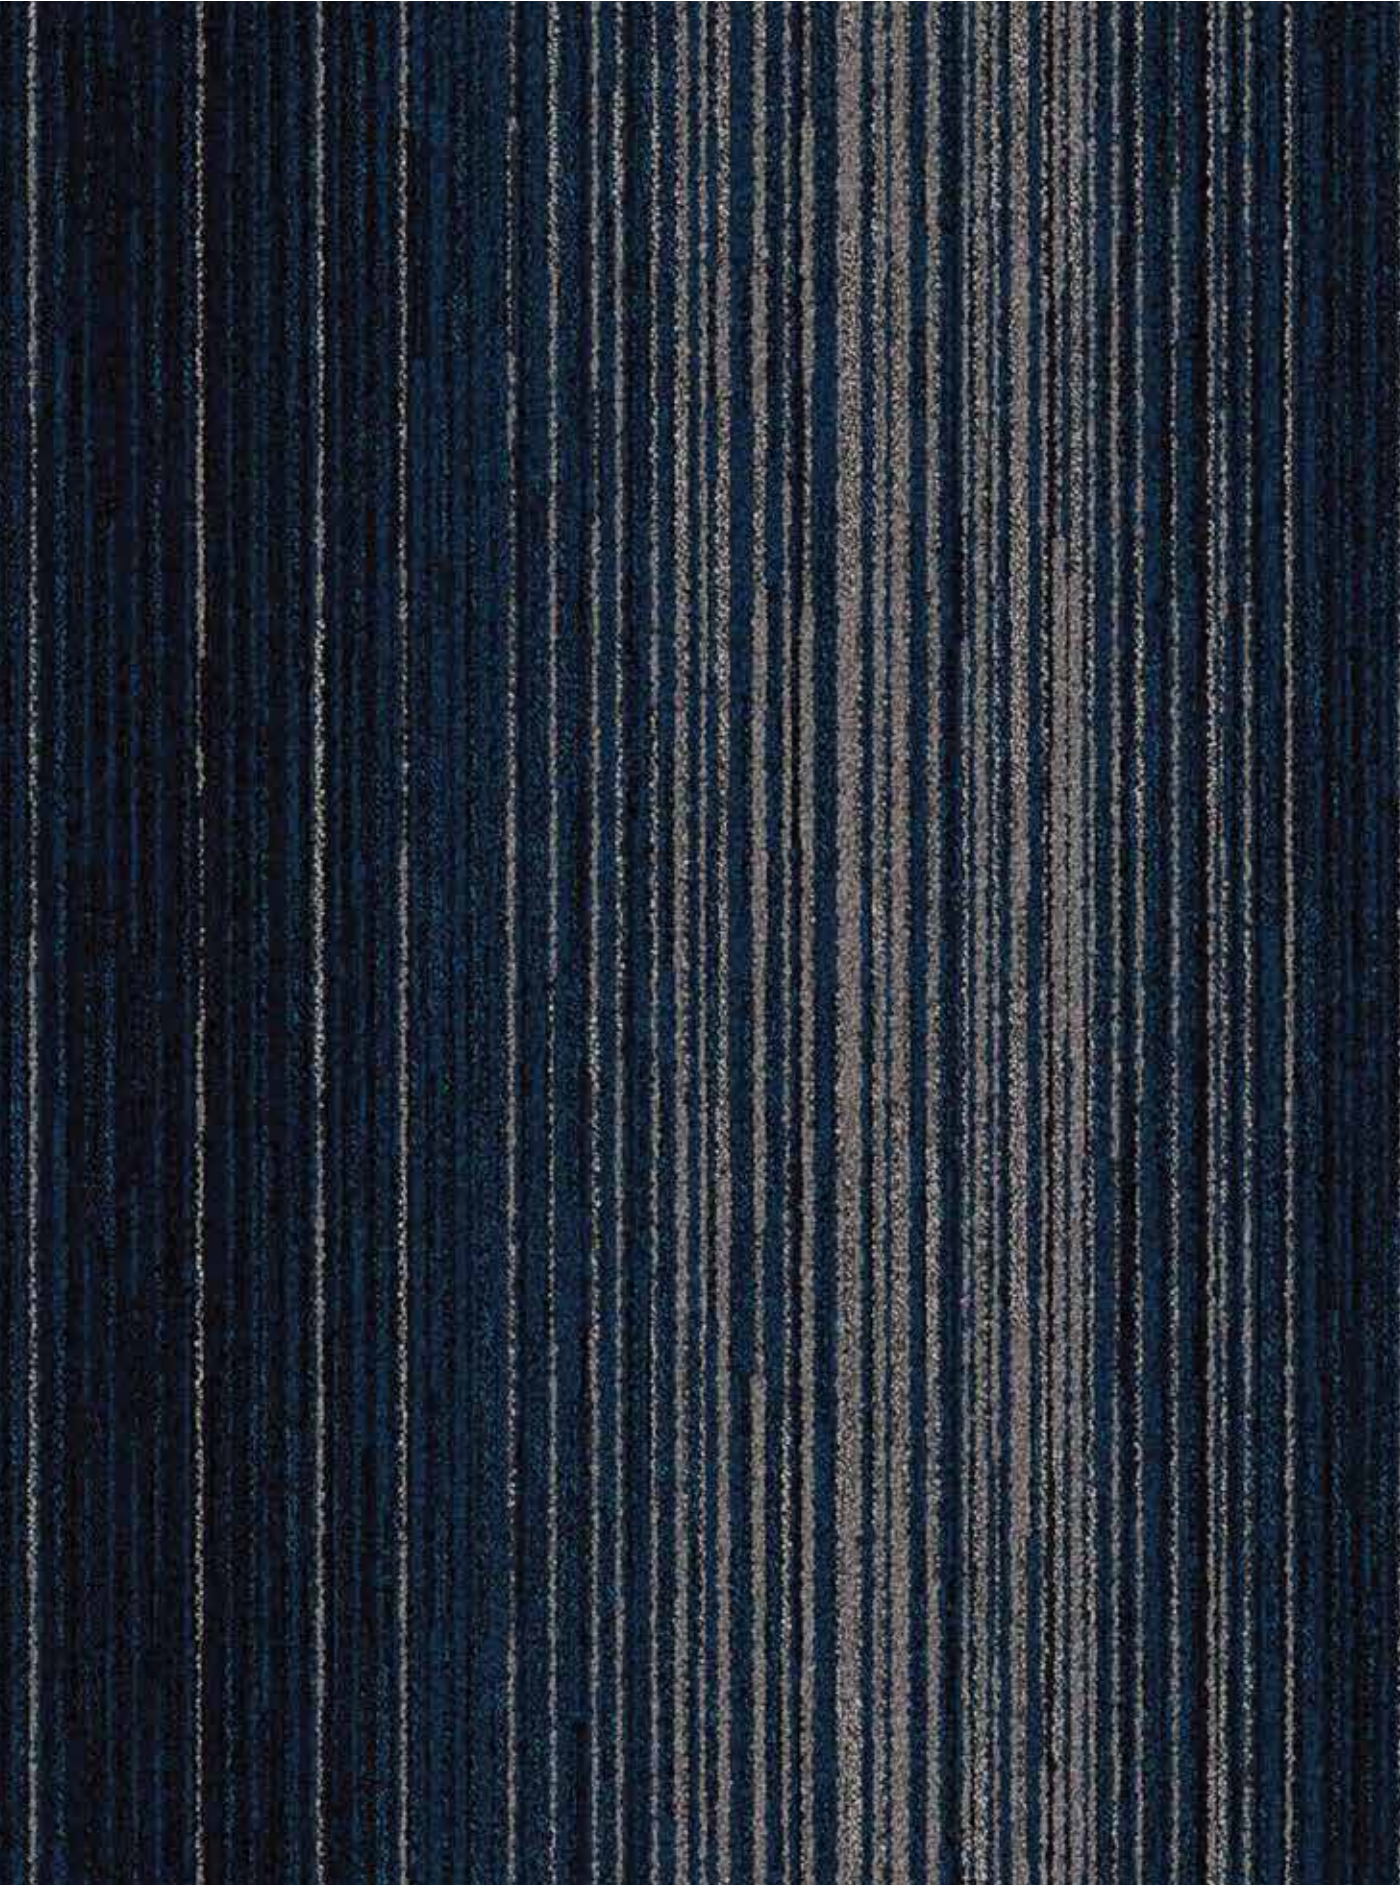


959 Silver Blue



Herringbone

959 Silver Blue



Ashlar

974 Grey

PRODUCT INFORMATION

Construction	LOOP PILE TIP SHEARED
Style	POINTE
Fiber	SDN (Solution Dyed Nylon 6)
Anti-soil Treatment	INVISTA
Pile Weight	850 gm/m ²
Total Weight	4.8 kg/m ²
Gauge	1/10th
Primary Backing	Non-Woven
Secondary Backing	100% Vinyl StableShield
Plank Size	1m x 25cm or 1m x 50cm
Pile Height	3.5 mm - 8.0 mm
Recommended Installation	Half Basket, Basket, Herringbone or Brick (1mx50cm Plank) Quarter Turn, Herringbone, Ashlar or Semi Ashlar (1mx25cm Plank)

TECHNICAL PERFORMANCES

Classification	Commercial / Heavy Contract	Class 33
VOC (Green Label Plus)	ASTM D5116-06	< 0.5 mg/m ² /hour (CRI GLP)
Flammability	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
Reaction to Fire	ASTM E648-08	Cfl-S1
Static Propensity	ISO 6356	0.2 KV
Color Fastness	AATCC/16	5/5 on Grey Scale
Termal Resistance	ISO 8302	0.04 m ² /KW
Impact Sound Insulation	ISO 140-8	23 dB
Dimensional Stability	EN 986	< 0.20%
Castor Chair Test	DIN 54324	R ≥ 2.4
Smoke Density	EN ISO 9239-1:2002	< 450






Half Basket


Basket


Herringbone


Brick


Ashlar


Semi Ashlar


Quarter Turn


Herringbone


ISO 9001:2000
Certified Company


ISO 14001:2004
Certified Company


OHSAS
18001:2007


CRI
GREEN LABEL
+PLUS
certified.org




LIFE TIME
WARRANTY

WEAR
STABILITY
CASTOR CHAIR
COMPATIBILITY
ANTISTATIC
LIGHT FASTNESS