


NEW

HETEROGENEOUS



Maple **7516**

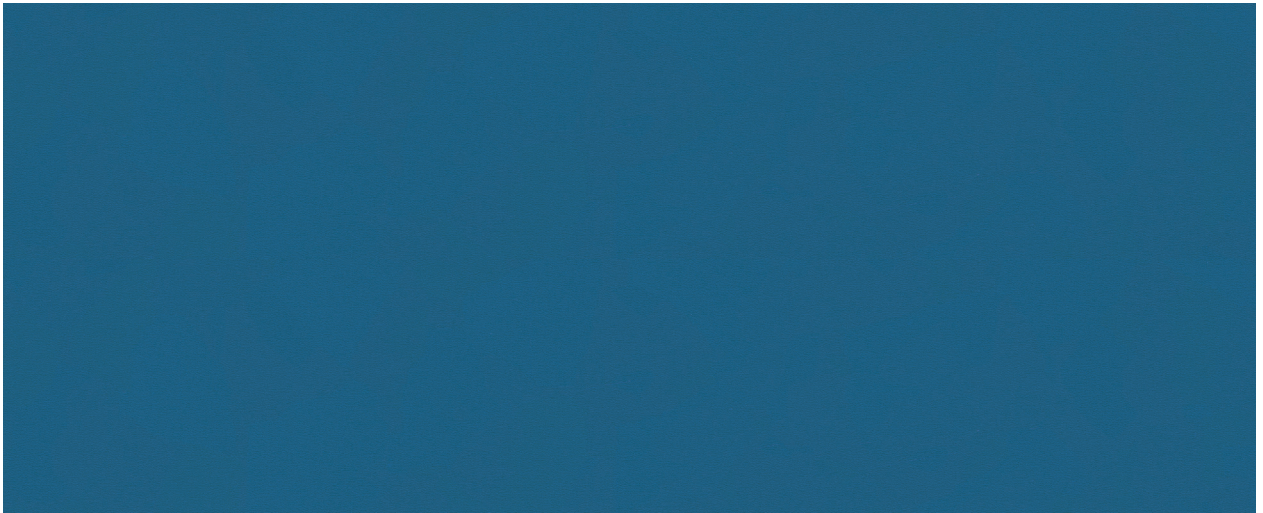

Blue **7512**



The closest perceived NCS - Natural Colour System references are quoted for your convenience. For more information see www.ncscolour.com
Light Reflectance Values (LRV) - all colours are tested in accordance with BS8300:2009.

SPORT67

High performance, heavy duty, multi-use sports floor covering with a polyurethane reinforcement for low cost, lifetime polish free maintenance.


Polyflor Sport 67 is recommended for use in school and local authority sports halls, gymnasias and leisure centres, where resilience underfoot and long life under heavy traffic are needed. Polyflor Sport 67 meets Sport England and Sport Scotland requirements and is a multi-use sports floor for general sporting activities including football, netball, basketball, volleyball, tennis and badminton.



	Gauge	-	6.7mm
	Roll Size	-	2m x 18.5m = 37m ²
	Total Weight		3600g/m ²
	General Performance	EN 14904	Meets
	Sliding Coefficient of Friction	EN 13036	80 - 110
	Shock Absorption	EN 14808	Pass
	Ball Rebound	EN 12235	Pass
	Vertical Deformation	EN 14809	Pass
	Reaction to Fire	EN 13501-1	Class Cfl-S1
	Abrasion Resistance	EN 649 EN ISO 5470-1	Group T <1000mg
	Impact Resistance	EN 1517	Pass
	Resistance to Indentation	EN 1516	Pass
	Specular Gloss	ISO 2813	≤30%
	Rolling-Load Resistance	EN 1569	Pass
	Polyflor Sport 67 is reinforced with polyurethane for improved cleaning and maintenance. Polyflor Sport 67 should not have a polish applied.		
	VOC Emissions	FloorScore	Certified
	Environmentally Preferable Flooring - 100% recyclable. Recyclable via the Recofloor scheme. Contains 24% recycled content.		
	Hygiene - All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.		
	For information regarding handling and installation (including line marking), adhesives, maintenance, applications and chemical resistance, consult Polyflor Customer Technical Services on +44 (0)161 767 1912, or email tech@polyflor.com.		

LINE MARKINGS
(width and colours)

50mm	40mm	50mm	50mm	50mm



BS EN 14041 EN 14904

