

Primero

LUXURY VINYL TILES



100% Made In Belgium





24913



22858



22139



Click Unidrop®
Available in:
191 x 1316 cm



4 sided bevel




Thickness
45 mm



Wear layer
0.3 mm



Sebastian Oak 22273

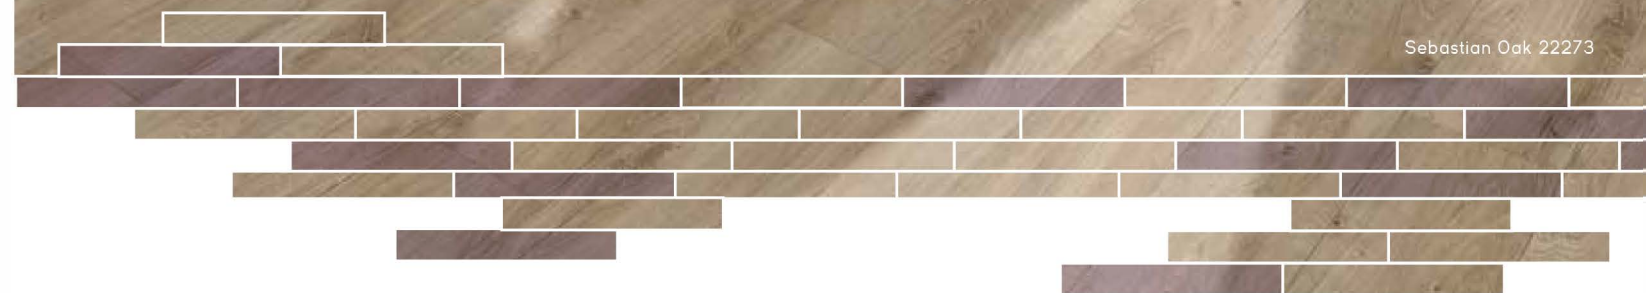

Navona Stone



46920



46952



46945



Click Unidrop®
Available in:
324x 655 cm



4 sided bevel



Thickness
45 mm



Wear layer
0.3 mm



Technical specifications

TECHNICAL INFO OF PRIMERO

		Dryback	Click
PRODUCT INFORMATION			
Level of use	EN ISO 10874	23 - 31	23 - 31
Total thickness	EN ISO 24346	2 mm	4.5 mm
Wear layer	EN ISO 24340	0.3 mm	0.3 mm
Wear Layer PUR treatment		Superguard Pro®	Superguard Pro®
Total weight g/m ²	EN ISO 23997	3328	7953
SIZE & PACKING			
Planks	EN ISO 24342	16.3 x 98.8 cm	19.1 x 131.6 cm
Tiles	EN ISO 24342	32.9 x 65.9 cm	32.4 x 65.5 cm
Box planks		3.87 m ² 24 pcs/box	1.76 m ² 7 pcs/box
Box tiles		3.90 m ² 18 pcs/box	1.49 m ² 7 pcs/box
TEST RESULTS			
Inflammability	EN 13501	Bfl-S1	
Abrasion group	EN ISO 660-2	Class T	
Scratch resistance	EN 16094	≤MSR-A2, ≤MSR-B2	
Squareness	EN ISO 24342	≤ 0.20 mm	
Straightness	EN ISO 24342a	≤ 0.35 mm	
Slip resistance	EN 13893	DS	
Slip restraint	DIN 51130	R10	
Residual indentation	EN ISO 24343-1	≤ 0.10 mm	
Furniture leg resistance	EN ISO 16581	No cracks, no damage	
Curling	EN ISO 23999	≤ 1.21 mm	≤ 1.11 mm
Dimensional stability	EN ISO 20326	Norm: ≤ 10.251% Average result: ≤ 0.10%	Norm: ≤ 10.151% Average result: ≤ 0.10%
Thermal resistance R	EN 12667	0.04 m ² K/W	0.04 m ² K/W
Acoustic insulation	EN ISO 717-2	4 dB	
Acoustic insulation + Xtrafloor Acoustic Comfort		19 dB	
Castor chair resistance	EN ISO 4918	No damage to wearlayer, no delamination	
Stain resistance	EN ISO 26987	Very good	
Light fastness	EN ISO 105-B02	≥ 6	
Underfloor heating and cooling	EN 12524	Suitable, max 27°C	
Warranty (year)		12 Residential - 5 Commercial	



Summer Oak 24235



The warranty covers manufacturing defects and premature wear in the event of normal use.

