RESPONSIVE

IMPACT®

A BETTER FLOOR

RESONATE®

SPC FLOORING

UNILIN™ CLICK SYSTEM

RES-901



RESPONSIVE

IMPACT®
A BETTER FLOOR


RES-901

RES-902



RESPONSIVE

IMPACT®
A BETTER FLOOR

RES-902




RES-903
RESPONSIVE
IMPACT
A BETTER FLOOR

RES-903



RES-904



RESPONSIVE

IMPACT®
A BETTER FLOOR

RES-904




RES-905
RESPONSIVE
IMPACT
A BETTER FLOOR

RES-905



RES-906



RESPONSIVE

IMPACT
A BETTER FLOOR

RES-906



RES-907



RESPONSIVE

IMPACT®
A BETTER FLOOR

RES-907



RES-910



RESPONSIVE

IMPACT®
A BETTER FLOOR

RES-910



RES-911



RESPONSIVE

IMPACT®
A BETTER FLOOR

RES-911



RESPONSIVE

IMPACT
A BETTER FLOOR


RESONATE®

SPC FLOORING: UNICLIC / UNIPUSH™ CLICK SYSTEM

UV SURFACE TREATMENT: Thickness In Microns
- Super Stain And Scratch Resistant
- Completely Waterproof
- No Bugs No Termites

TRANSPARENT WEAR LAYER: 0.50 mm
- Enhances The Colour And Emboss
- Protects From Abrasion

OVER ALL THICKNESS: 5.0 mm

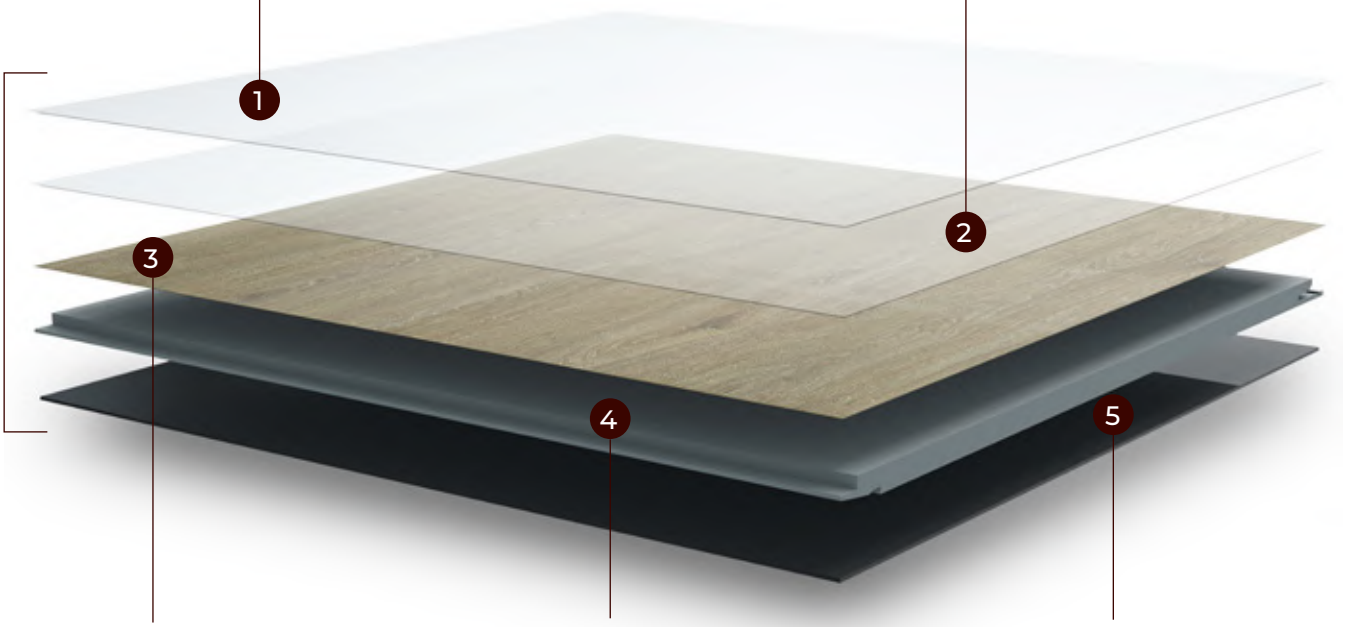

FILM LAYER: 0.10 mm
- Elegant Wood Designs
- Natural Looking, Natural Feeling

RIGID CORE: 3.40 mm
- Sturdy Construction
- Dimensional Stability
- Uniclic™ / Unipush™ Click System
- Quick And Easy Installation

IXPE Backing: 1.00 mm
- 1mm IXPE Backing With Good Grip
- Insulates Sound
- Provides Underfoot Comfort

FEATURES & BENEFITS

- Superior Scratch & Stain Resistant
- No Bugs & Termites
- No Adhesive Required
- 100% Waterproof
- Easy Clean
- Natural Looking Design
- Zero Maintenance
- Superb Dimensional Stability
- Heavy Foot Traffic
- Excellent Sound Insulation

APPLICATIONS

- Corporate Offices
- Residential
- Retail
- Hospitality



PLANK SIZE: **9” x 48” x 5.0mm**

RESONATE®

SPC FLOORING

SIZE: 9” x 48”

THICKNESS: 5.0 MM

WEAR LAYER: 20 MIL | 0.50 MM

PIECES: 10 PER BOX

COVERAGE: 30.18 SQ FT / BOX | 2.8 M^2 / BOX

INTERLOCK: UNLIN® CLICK SYSTEM

RESPONSIVE

IMPACT
A BETTER FLOOR

RESONATE®

SPC FLOORING: UNICLIC / UNIPUSH™ CLICK SYSTEM

SPC FLOORING FOR HEAVY COMMERCIAL USE

PUR Polyurethane Reinforcement | Product Standard: ISO 10582

CERTIFICATION & CLASSIFICATION	STANDARD	RESONATE®
TYPE OF FLOOR COVERING	ISO 10582	SPC
CE CERTIFICATION	EN 14041	Yes
CLASSIFICATION	EN ISO 10874	Heavy Traffic : Class 33

TECHNICAL CHARACTERISTICS	STANDARDS	RESONATE®
TOTAL THICKNESS	EN ISO 2436 (EN 428)	5.0 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	20 mil WL | 0.50 MM
SURFACE TREATMENT	UV TREATED	PUR
TOTAL WEIGHT	EN ISO 23997 (EN 430)	8000 g/m²
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
FORM OF DELIVERY	EN ISO 24342 (EN 427) Planks box	9" x 48" = 30.18 sq.ft | 10 Pieces per box 230 x 1219 mm = 2.8 m² | 10 Pieces per box

TECHNICAL PERFORMANCES	STANDARDS	RESONATE®
DIMENSIONAL STABILITY	EN ISO 23999 (EN 434)	≤ 0.10%
REACTION TO FIRE	EN 13501 – 1	Bfl- S1
RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	Required Value : ≤ 0.10mm Average Measured Value : 0.03mm
FURNITURE LEG	EN 424	No Damage
CASTOR CHAIR	EN ISO 4918 (EN 425)	No Damage
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	≤ 2mm
THERMAL RESISTANCE	EN ISO 10456	0.07M2 K/W
IMPACT SOUND REDUCTION	EN ISO 140-8 EN ISO 717/2	w = 11 Db
LIGHT FASTNESS	EN ISO 105 – B02	PASS
RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	Good Resistance
SLIP RESISTANCE	DIN51130 EN 13893	R9 | PASS
ELECTRICAL PROPERTIES	EN 1815 EN 1081	< 2 kV On Concrete R1 > 10^{10} Ω

floor score
CERTIFIED BY SCS Global Services

ISO 9001

ISO 14001

ISO 18001

33

EN 14041

© All contents of this Technical Data Sheet are of the copyright of Responsive Industries Limited. Any duplication in any form without prior permission is strictly prohibited.
The above data is also valid at the time of print. For more details regarding the technical specifications, handling and installation, please contact Responsive Industries Limited.