


SOL




The “Members Club” collection

DARK

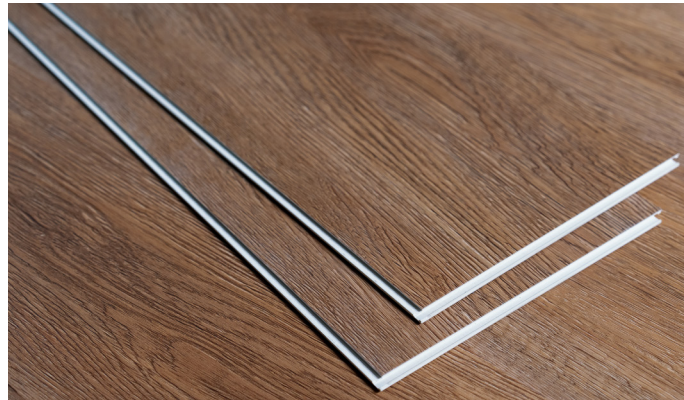

Gentleman MCWL001


A timeless dark oak that adds warmth and class to any interior.
Available in standard & Herringbone planks.

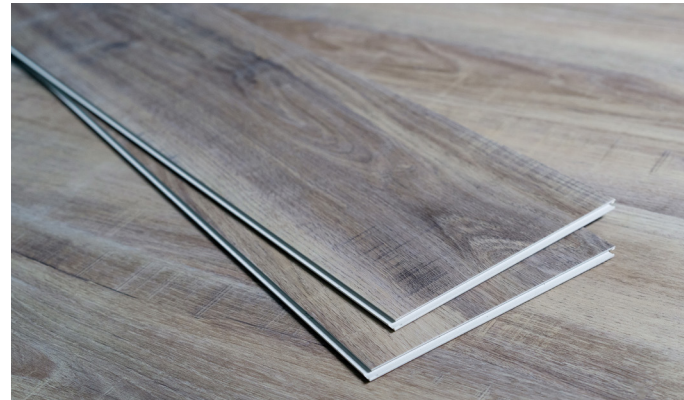

Rebel MCWL003

A greige wood that adds a touch of character to any interior and sets the tone of a contemporary space.
Available in standard planks.

LIGHT

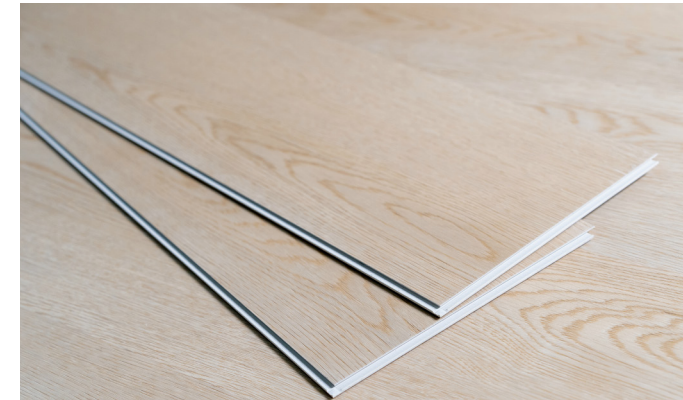

Gracious MCWL005


The soft and light tones can add serenity and a sense of freshness to your space.
Available in standard planks.



Cosmopolitan MCWL002


A contemporary natural oak with fresh tones bringing a vivid atmosphere to your interiors.
Available in standard & herringbone planks.

CONCRETE

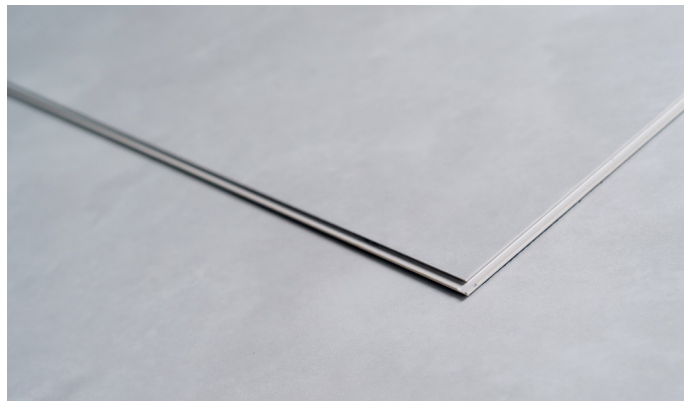

Urbane MCCT006

Gentle grey- colored tiles that add a sense of calmness and serenity to your interiors while giving the illusion of a bigger space.
Available in tiles.

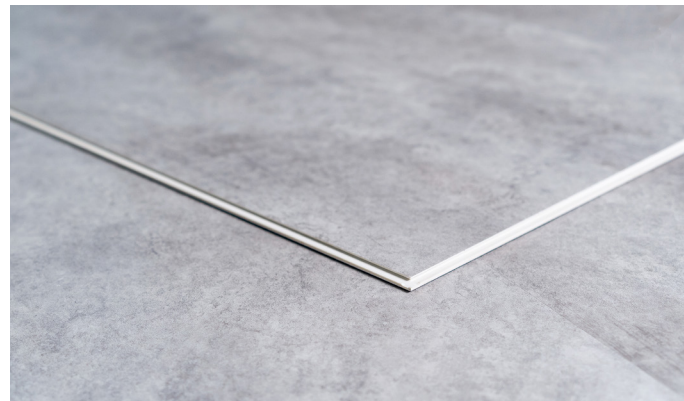

Sophisticated MCCT005

A concrete finish that can add a sophisticated touch and an edgy vibe to your interiors.
Available in tiles.



Muse MCWL004

A modern grey oak flooring that can convey a sense of comfort in a contemporary style.
Available in standard planks.



Features & Benefits



Waterproof

SOL floorings are highly resistant to water and moisture, making them ideal for wet areas, such as kitchens, bathrooms or laundry rooms.



Easy to clean & maintain

It doesn't take more than a simple dry vacuum or microfiber sweeper for cleaning your flooring. Should you wish to conduct deep cleaning; a damp mop can get the job done.



Anti-Bacteria

Because hygiene and wellbeing are top priorities, a unique surface treatment is being applied on top of our floorings in order to prevent the growth of microbes, bacteria, fungus and more.



Pet friendly

From accidental spills to pet messes, we've got you covered!



Low VOC emission/Air quality

SOL contributes towards good indoor air quality. We promote healthy living especially for children and people with respiratory problem.



Realistic and trendy visuals

The patterns and colors developed by our design team are authentic and in line with the latest design trends.



Extremely durable

SOL is made to be lived on. It is highly resistant to scratches, indents and stains. No need to worry anymore about replacing your flooring constantly!



Installation on top of the existing floor/ Hiding imperfection

SOL can be installed directly on top of any existing flooring. The overall process is fairly quick. It can be done within few hours and does not call for vacating the area.



Sound reduction

SOL offers you high impact sound reduction and underfoot comfort.



Slip resistance


SOL improves safety by reducing slipperiness and increasing traction. We give you that extra piece of mind walking barefoot.

Accessories & Finishes

Matching Color Reducer Profile:
2400x45x12mm



Matching Color 9 Cm Skirting:
2400x90x15mm

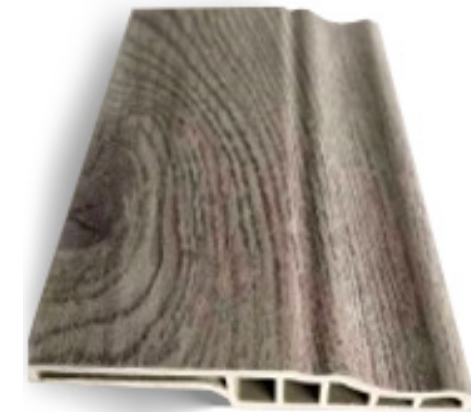

Matching Color stair profile:
2400x55x18mm



Technical Specification

PRODUCT INFORMATION

Item	SPC flooring
Plank Size	180x1230mm/305x610mm/125x625mm
Thickness	5mm (+/- 0.05, unstressed)
Wear Layer Thickness	0.3mm (+/- 0.05, unstressed)
Planks/Box	12planks/box, 14planks/box
Density	2090kg/m ³
Finish	UV Coating
Emboss	Deep embossing/Leather embossing
Installation	Click Floating
Locking System	Välinge 2G
Bevel	Four-sided bevel
Maximum installation area	10 x 10 m
Underfloor heating	Suitable
Warranty	20 years for residential use, 15 years for commercial use
Impact sound reduction	21 dB

UNDERLAYMENT INFORMATION

Material	IXPE
Overall Thickness	1.0mm (+/- 0.05, unstressed)

UNDERLAYMENT INFORMATION NORMS RESULT

UNDERLAYMENT INFORMATION	NORMS	RESULT
Tolerance of Length	EN 427	≤ 0.15%
Tolerance of Width	EN 427	≤ 0.15%
Determination of stability	EN 434	≤ 0.15%
Abrasion Resistance	EN 660-2	Group T
Thermal conductivity	EN12524	0.11W/(M.K)
Reaction to Fire	EN 13501-1	Bf1-S1
Castor Chair Resistance	EN 425	Pass
Classification	EN685	Class 23 for residential Class 33 for commercial
Stain Resistance	EN423	Not affected
VOC	ISO 16000	VOC A+
Slip Resistance	DIN51130	Class R9
Residual Indentation	ISO24343-1:2007	≤ 0.1 mm
Chemical Products Resistance	EN423	Pass
Ortho-Phthalates	US EPA 3550c:2007	None
PCP	EN 12673	None
Formaldehyde Emission	EN717-1	E1
Light fastness	EN ISO 105 B02	Blue wool scale: Stage ≥ 6

INSTALLATION

Sol is much easier to install than hardwood and other types of flooring and can be completed by the homeowner or a professional installer. If you choose to install it yourself, be sure to carefully follow installation instructions from the manufacturer.

CLEANING

To keep your floor looking new, use a broom, vacuum or microfiber sweeper for a quick clean up. For deeper cleans, a damp mop and mild cleaner get the job done. As a bonus, there's no waxing required!



Certificates



Waterproof



Anti-Bacteria



CERTIFIED BY
SCS Global Services



Deutsches
Institut
für
Bautechnik



© Sol

