

spirit.



vinyl planks & tiles.

DIMENSIONS: gluedown 55: 1520 x 237 mm | click comfort 55: 1511 x 228 mm




COUNTRY WHITE GREY

gluedown 55: 60001466 | click comfort 55: 60001434
matching skirtings: 63002271 | T-profile: 63002327



COUNTRY HONEY

gluedown 55: 60001465 | click comfort 55: 60001433
matching skirtings: 63002270 | T-profile: 63002326

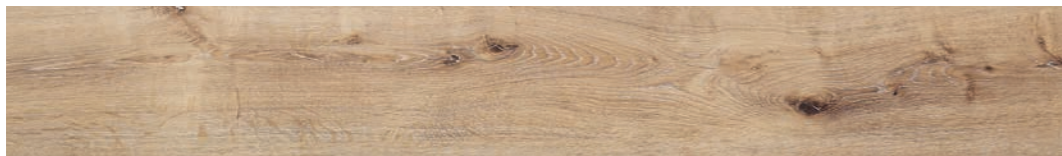

COUNTRY CARAMEL

gluedown 55: 60001468 | click comfort 55: 60001436
matching skirtings: 63002273 | T-profile: 63002329



DIMENSIONS: gluedown 55: 1520 x 237 mm | click comfort 55: 1511 x 228 mm



ELITE GREIGE

gluedown 55: 60001458 | click comfort 55: 60001426
matching skirtings: 63002263 | T-profile: 63002319



COUNTRY BROWN

gluedown 55: 60001470 | click comfort 55: 60001438
matching skirtings: 63002275 | T-profile: 63002331



CEMENT LIGHT GREY


gluedown 55: 60001490 | click comfort 55: 60001480
matching skirtings: 63002285 | T-profile: 63002341

DIMENSIONS: gluedown 55: 1520 x 237 mm | click comfort 55: 1511 x 228 mm



ELITE HONEY

gluedown 55: 60001459 | click comfort 55: 60001427
matching skirtings: 63002264 | T-profile: 63002320



CEMENT GREY

gluedown 55: 60001491 | click comfort 55: 60001481
matching skirtings: 63002286 | T-profile: 63002342

Technical data.



SPIRIT HOME

product specifications.		40 click comfort plank
total thickness	EN ISO 24346	4 mm
integrated underlay		1 mm
thickness of the wear layer	EN ISO 24340	0,4 mm
total weight	EN ISO 23997	7,9 kg/m ²
usage classification	EN ISO 10582	23/32
test results.		40 click comfort plank
underfloor heating	EN ISO 12524	suitable max. 27° (80°F) / electrical floor heating systems: max 60 W/m ²
castor chair	EN ISO 4918	pass
fire resistance	EN ISO 13501-1	Bfl-s1
chemical resistance	EN ISO 26987	OK
residual indentation	EN ISO 24343-1	< 0,1 mm
slip resistance	DIN 51130	R10
	EN ISO 13893	class DS
sound reduction: impact sound	EN ISO 717-2	20 dB
reflected walking sound	EPLF draft 021029-3-2004	33 SONE (57% sound reduction)
dimensional stability	EN ISO 23999	< 0,15%
residential warranty		20 y
commercial warranty		5 y
formaldehyde	EN ISO 717-1	E1
lock strength	EN ISO 10582	> 4 kN/m

SPIRIT PRO

product specifications.		55 gluedown plank	55 click comfort plank	55 gluedown tile	55 click comfort tile	55 gluedown plank	55 click comfort plank
total thickness	EN ISO 24346	2,5 mm	4,5 mm	2,5 mm	4,5 mm	2,5 mm	4,5 mm
integrated underlay		-	1 mm	-	1 mm	-	1 mm
thickness of the wear layer	EN ISO 24340	0,55 mm	0,55 mm	0,55 mm	0,55 mm	0,55 mm	0,55 mm
total weight	EN ISO 23997	4,95 kg/m ²	9,3 kg/m ²	4,95 kg/m ²	9,3 kg/m ²	4,95 kg/m ²	9,3 kg/m ²
usage classification	EN ISO 10582	23/33/42	23/33	23/33/42	23/33	23/33/42	23/33
test results.		55 gluedown plank	55 click comfort plank	55 gluedown tile	55 click comfort tile	55 gluedown plank	55 click comfort plank
underfloor heating	EN ISO 12524	suitable max. 27° (80°F) / electrical floor heating systems: max 60 W/m ²					
castor chair	EN ISO 4918	pass	pass	pass	pass	pass	pass
fire resistance	EN ISO 13501-1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
chemical resistance	EN ISO 26987	OK	OK	OK	OK	OK	OK
residual indentation	EN ISO 24343-1	< 0,1 mm	< 0,1 mm	< 0,1 mm	< 0,1 mm	< 0,1 mm	< 0,1 mm
slip resistance	DIN 51130	R10	R10	R10	R10	R10	R10
	EN ISO 13893	class DS	class DS	class DS	class DS	class DS	class DS
sound reduction: impact sound	EN ISO 717-2	3 dB	20 dB	3 dB	20 dB	3 dB	20 dB
reflected walking sound	EPLF draft 021029-3-2004	25 SONE (67% sound reduction)	37 SONE (52% sound reduction)	25 SONE (67% sound reduction)	37 SONE (52% sound reduction)	25 SONE (67% sound reduction)	37 SONE (52% sound reduction)
dimensional stability	EN ISO 23999	< 0,15%	< 0,15%	< 0,15%	< 0,15%	< 0,15%	< 0,15%
residential warranty		25 y	25 y	25 y	25 y	25 y	25 y
commercial warranty		10 y	10 y	10 y	10 y	10 y	10 y
formaldehyde	EN ISO 717-1	E1	E1	E1	E1	E1	E1
lock strength	EN ISO 10582	-	> 5 kN/m	-	> 5 kN/m	-	> 5 kN/m

