
## Star Carpet Tiles







ST-22 Yellow Brown

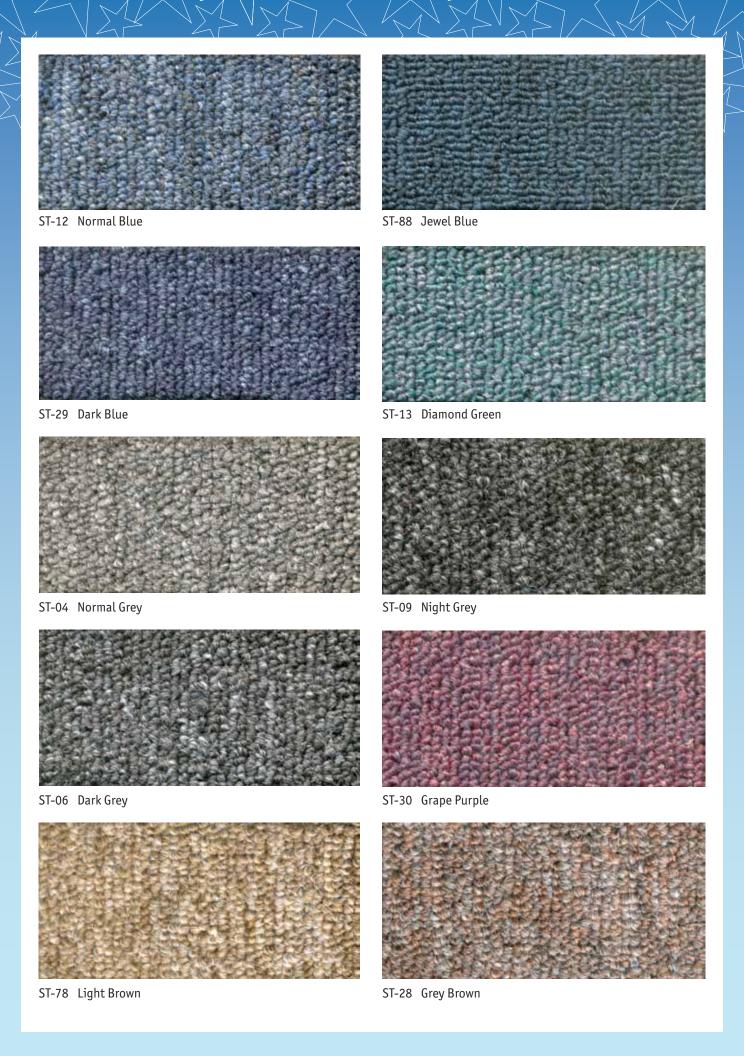

ST-31 Coffee Brown



ST-68 Red Brown



ST-14 Grey Red

## **Quality Parameters:**

## **CARPET TILE STAR**

Product Form : Tile

Product Dimensions : 500 x 500mm
Product Construction : Tufted loop pile

Surface Yarn : 100% BCF Polypropylene

Dye Method : Solution Dyed

Pile Weight : 500g/m
Stitches : 48 per dm

Primary Backing : Polypropylene
Secondary Backing : Bitumen

Total thickness : 6mm

Total thickness : 6mm
Pile Height : 3mm

Total Weight : about 3160g/m Packaging : 6 sqm/carton

## PERFORMANCE SPECIFICATION

Hot metal nut BS 4790:1987 < 75mm (Medium Radius)
Smoke Density ASTM-E-662 <=450 DMC
Color fastness to water Pass

Color fastness to water Pass
Color fastness to light Grade 4
Color fastness to rubbing Pass

Carpets: Cleaning of: hot water extraction method 4.5 scale Number of binding sites per length or width of floor covering: 32/39



Flame Retardant-does not contribute to the start or spread of fire.



Suitable for medium contract use: offices, shops, schools, hospitals and other public areas.



Suitable for areas where roller-castor chairs are used.



Suitable for use in rooms where personal computers are installed.



Antistaticelectrostatic shock is reduced to a minimum.



Environmental

