



TARASAFE SUPER & PLUS

SUPER



PLUS



High performance vinyl safety flooring for contract applications

Performances and benefits



Brighter, cleaner surface that adds real sparkle



Easier to install, lighter & more flexible to handle



High resistance to heavy traffic



Easier to cut-up 5 times more blade life



100% recyclable & contains recycled materials

As per order only available the material




7731 Marbre

LRV: 51.2
WR: 0509



7386 Savana

LRV: 44.0
WR: 0645

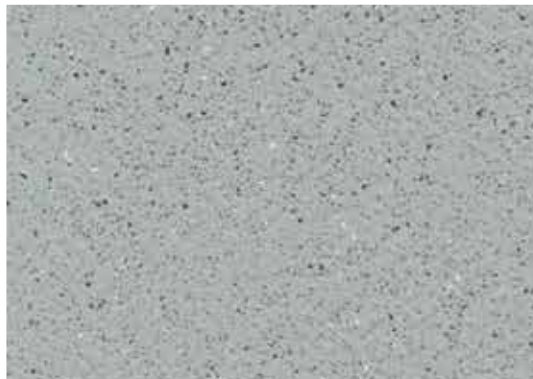

7767 Dove Grey

LRV: 34.1
WR: 0336



7438 Baleine

LRV: 21.0
WR: 0638



7302 Sahara

LRV: 35.1
WR: 0094



Compact sheet without foam backing



Compact sheet with textile backing

LRV: Light Reflectance Value

WR: Welding Rod = 0585 + colour code number

Suitable for heavy traffic applications

* For more details visit the greenguide.org.uk



Gerflor
theflooringroup

TARASAFE SUPER and **TARASAFE PLUS** are slip resistant safety vinyl floorcoverings, with a PVC wear layer and deeply **inlaid mineral crystal particles** (patented). They are reinforced by a glass fibre grid and available in a sheet format. They are an ideal solution for **heavy traffic applications** where slip resistance, durability, hygiene and easy maintenance are required.

TARASAFE PLUS comprises a textile backing for better adherence in wet areas. It helps reducing telegraphing.

TARASAFE SUPER and **PLUS** are suitable for most contract & commercial areas. They are eco-friendly, 100% recyclable, Floorscore® certified and do not contain any heavy metals or CMR 1&2, they are also 100% compliant with REACH.

The product emission rate of volatile organic compounds is < 100 µg/m³ (TVOC after 28 days – ISO 16000 -6).

			TARASAFE SUPER	TARASAFE PLUS
DESCRIPTION				
Total Thickness	EN ISO 24346 [EN 428]	mm	2.20	2.50
Thickness of wearlayer	EN ISO 24340 [EN 429]	mm	1.12	1.14
Weight	EN ISO 23997 [EN 430]	g/m²	2880	3090
Width/Length of Sheet	EN ISO 24341 [EN 426]	cm/lm	200/20	200/20
CLASSIFICATION				
Norm/Product Specification	-	-	EN ISO 10582 [EN 649]	EN ISO 10582 [EN 649]
European classification	EN ISO 10874 [EN 685]	class	34-43	34-43
Fire Rating	EN 13501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance wet: ramp test with oil	DIN 51 130	class	R12	R10
PERFORMANCE				
Wear Resistance	EN 660.2	mm³	≤ 2	≤ 2
Wear group	NF 189	group	T	T
Type Binder content	EN ISO 10582	type	I	I
Dimensional stability	EN ISO 23999 [EN 434]	%	≤ 0.40	≤ 0.40
Residual indentation	EN ISO 24343-1 [EN 433]	mm	≤ 0.10	≤ 0.10
Residual indentation (average measure)	-	mm	≈ 0.03	-
Castor chair test (type W)	ISO 4918 [EN 425]	-	OK	OK
Thermal conductivity	EN ISO 10456 [EN 12524]	W/(m.K)	0.25	0.25
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6
Chemical products resistance	EN ISO 26987 [EN 423]	-	OK	OK
Anti-bacterial activity (MRSA) ⁽¹⁾	ISO 22196	-	> 99% Inhibits growth	> 99% Inhibits growth
ENVIRONMENT / INDOOR AIR QUALITY				
TVOC after 28 days	ISO 16000-6	µg/m³	< 100	< 100
Certification	-	-	Floorscore®	-
CE MARKING				
CE	EN 14 041	-		

(1) The implementation of an effective cleaning method is the best defence against infection.

CI SIB

(43)Tn6

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

IMPORTANT: The information contained in this document is valid from 01/04/2018 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

TARASAFE PLUS & SUPER, LESS SPEAKING FOR MORE ACTIONS

COMPOSITION

100% REACH

INDOOR AIR QUALITY

10 times lower than norms requirements
(TVOC < 100 µg/m³ after 28 days)

RECYCLABILITY

100%

LCA

Eco-designed according to a product specific life cycle analysis

WELLNESS

Anti slip R10