

24" X 24"

(60.96 X 60.96cm)






Cookies n Cream (14107)




Tapioca Pudding (42102)




Chai Latte (83098)

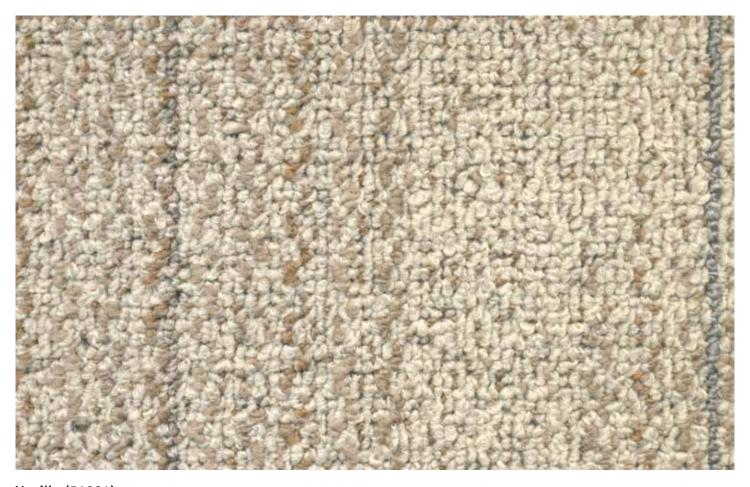

Vanilla (51091)

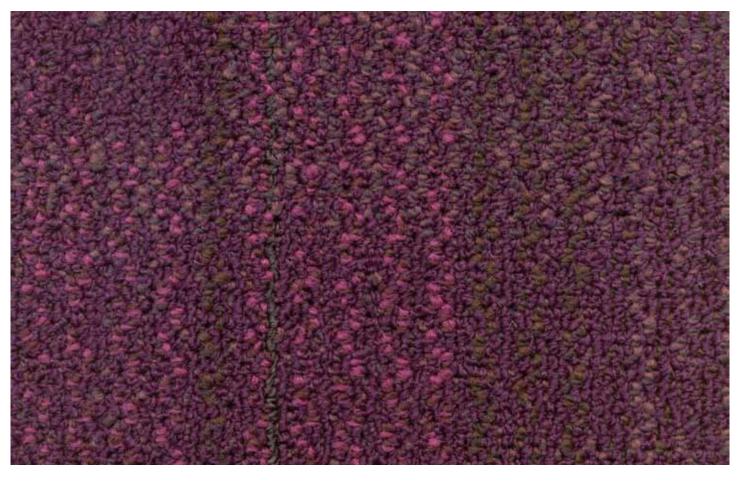

Eggplant (24096)

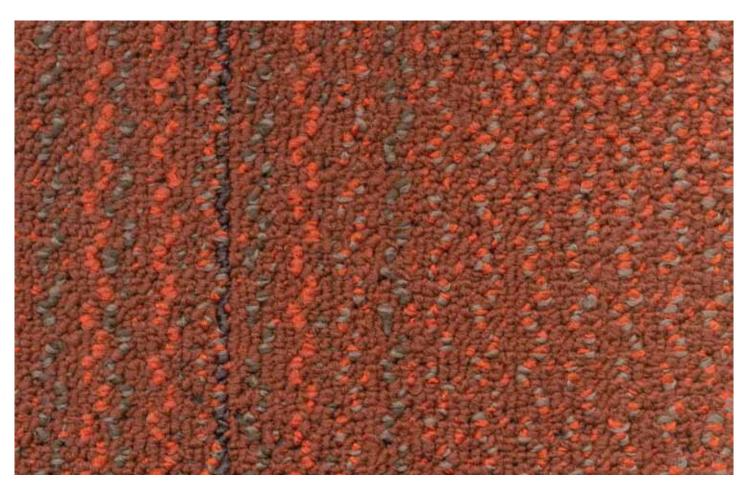

Strawberry (73094)

MANNINGTON

Product Specification		
Style		Taking Shape Now
Construction		Patterned loop
Face fiber	St. St.	Mannington Quantum Nylon
Dye method		Solution / Yarn
Gauge		1/12 (47.24 per 10cm)
Stitches per inch		7.6 (29.92 per 10cm)
Pile thickness		.084 (2.13mm)
Tufted yarn weight		16 oz./sq.yd. (542 g/m²)
Primary substrate		100% Synthetic
Secondary backing		infinity® Modular - conatins pre-consumer
		recycled content. Certified NSF/ANSI-140 Gold.
Installation methods		Random
		(other installation methods at owner's discretion)
Methanamine pill test	and the	Passes
(ASTM-D-2859)		
Flooring radiant panel test	2000	Class I (Direct Glue)
(ASTM-E-648)	-	
N.B.S. smoke chamer test		< 450 (Flaming Mode)
(ASTM-E-662)		
Electrostatic propensity test		< 3.0 KV
(AATCC 134)		
Available width		24" x 24" (60.96 x 60.96cm)
Average density		6,857 (254.79Kg/m³)
CRI indoor air quality control		GLP7616 infinity®
green label plus ID		

Good Form Collection contains Mannington Quantum Nylon™.

Limited Lifetime Wear and Backing Warranty, Infinity® Modular. Limited 10-Year SafeGuard SR™ Stain Resistant Warranty.

Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance. Protective chair pads are recommeded under office chairs with roller casters to preserve appearance and to avoid permature wear.

As with all quality carpets, slight variation in color may occur from dye lot to dye lot.

Backings or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance. This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.

Note: The inherent characteristics of these patterns can result in double-dark or double-light lines at the seam or along the edges. Pattern run off or blas within industry tolerances is also an inherent characteristic of patterned carpet. These are not considered manufacturing defects, and as such, should be considered when selecting a carpet installation method.