

Contract Plus

HOMOGENEOUS COMPACT VINYL

Harmonious
colors for
warm and
cosy interiors

Powered by



 **Tarkett**

Contract Plus



Light Sand 21455 018



Warm Sand 21455 017



Light Cool Beige 21455 011



Warm Beige 21455 016



Cold Sand 21455 001



Beige 21455 014

Contract Plus



White 21455 008



Cold Grey 21455 010



Light Grey 21455 007



Dark Warm Grey 21455 003




Grey 21455 006



Dark Grey 21455 005

Contract Plus



Light Cold Grey 21455 009



Light Green 21455 022




Light Blue 21455 024



Green 21455 021




Blue 21455 023

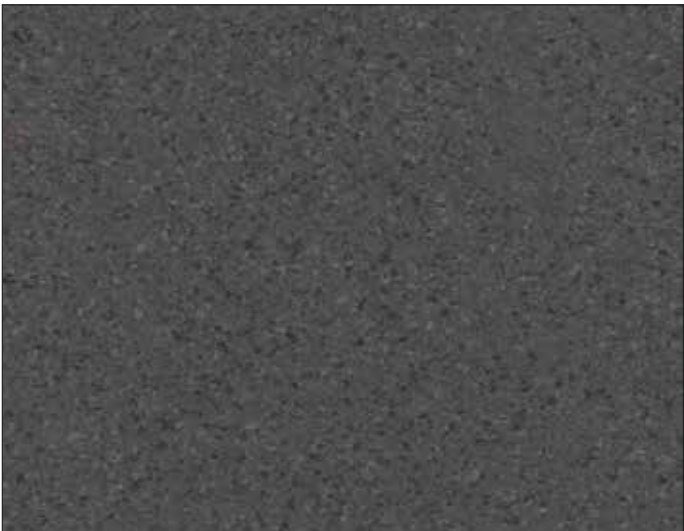

Black 21455 004

Contract Plus

HOMOGENEOUS COMPACT VINYL




Cool Beige

21455 **012**




Warm Grey

21455 **002**

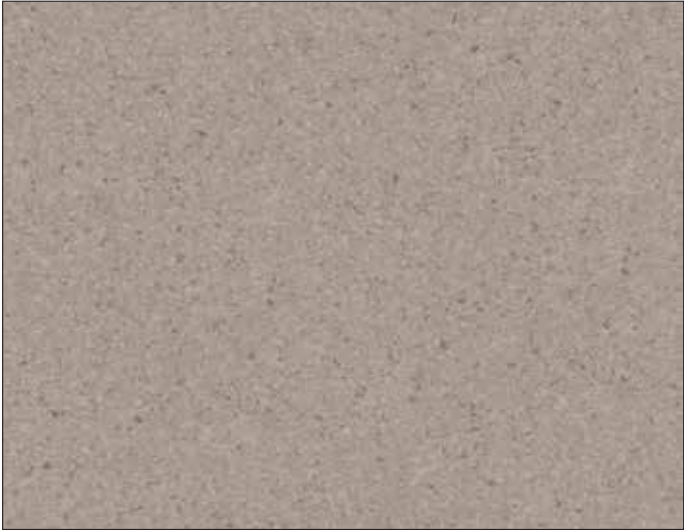


Cold Brown

21455 **013**

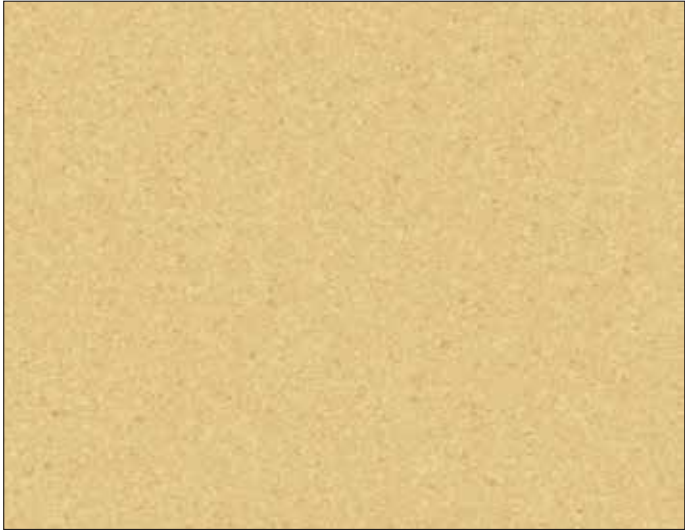

Yellow

21455 **020**

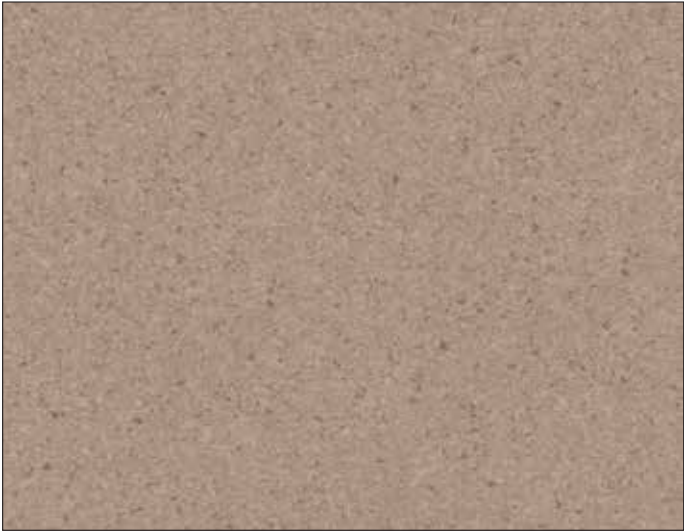

Brown

21455 **015**



Orange

21455 **019**

Contract Plus

TECHNICAL DATA	STANDARD	CONTRACT PLUS
CERTIFICATION & CLASSIFICATION		
Classification	EN ISO 10581 EN ISO 10874	Homogeneous, single layered vinyl flooring Commercial: 34 / Industrial: 43
Wear layer binder content	EN ISO 10581	Type II
TECHNICAL CHARACTERISTICS		
Total thickness	EN ISO 24346	2.0 mm
Total weight	EN ISO 23997	3150 g/m ²
Wear layer thickness	EN ISO 24340	2.0 mm
PUR		Yes
Form of delivery	ISO 24341 Sheet (rolls)	Approx. 23 running meters x 200 cm - Art. no. 21455 -- 3 digit colour number
PERFORMANCES FOR CE MARKING REQUIREMENTS (EN 14041)		
Declaration of Performance	EN 14041	0019-0023-DoP-2013-07
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B _{fl} s1 ≥ 8 kW/m ² Pass
Electrostatic properties	EN 1815	< 2 kV
Thermal conductivity	EN 12667	Approx. 0.01 m ² K/W
Slip resistance	EN 13893	μ ≥ 0.3
TECHNICAL PERFORMANCES		
Residual indentation	EN ISO 24343-1	Required value: < 0.10 mm / Best measured value*: 0.04 mm
Slip resistance	DIN 51130	R9
Flexibility	ISO 24344, Method A	No cracking on 20 mm mandrel
Castor chair test	ISO 4918	Suitable
Light fastness	EN ISO 105-B02	≥ level 6
Dimensional stability	EN ISO 23999	≤ 0.40 %
Chemical resistance	ISO 26987	Good resistance
Bacteria resistance	ISO 846 Part C	Does not favour growth
Clean room test	ASTM F51/00	Class A
Underfloor heating		Suitable - max. 27°C
Seam strength	EN ISO 24345	Average value: ≥ 240 N/50mm / Individual values: ≥ 180 N/50mm
ENVIRONMENTAL PERFORMANCES		
Total VOC emissions	ISO 16000-9	≤ 10 µg/m ³ (after 28 days)
COLOURS		
24		

The above information is subject to modification for the benefit of further improvement. (06/20).

According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com

*For information - not binding.



Colour N°	Welding rods N°	Colour N°	Welding rods N°	Colour N°	Welding rods N°	Colour N°	Welding rods N°
001	1291 810	007	1287 446	013	1287 799	019	1292 370
002	1292 771	008	1287 770	014	1287 800	020	1287 805
003	1287 533	009	1287 522	015	1287 806	021	1287 799
004	1287 529	010	1287 809	016	1292 372	022	1287 800
005	1287 444	011	1292 370	017	1287 522	023	1287 806
006	1292 771	012	1287 805	018	1287 809	024	1292 372

DURABLE AND MULTIPURPOSE

Contract Plus is a versatile and non-linear pattern flooring, suitable for high-traffic areas:

- High durability and resistance
- PUR surface treatment for easier maintenance
- Good chemical resistance
- Coordinated welding rods for a perfect watertightness and finish

Environmental performances

- Low VOC emissions
- Phthalate-free
- 100% recyclable



Powered by



Tarkett