

# Eclipse Premium Spirit

HOMOGENEOUS COMPACT VINYL


Combine  
& Create

Powered by



 **Tarkett**

# Eclipse Premium Spirit

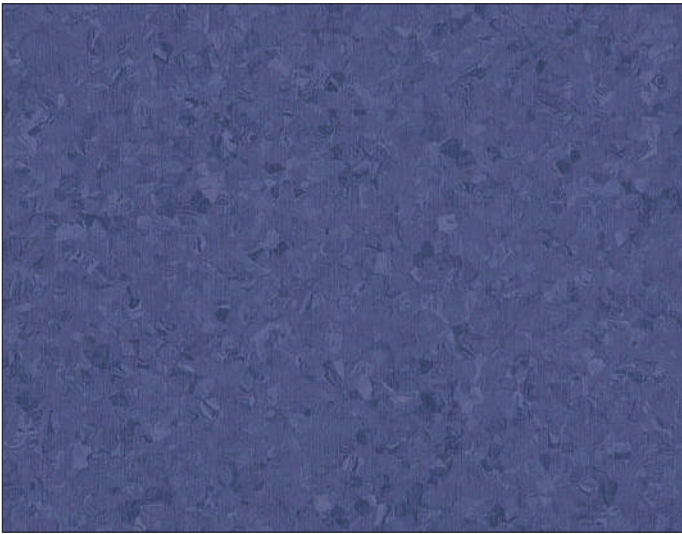

Midnight Blue

21020 775




Medium Blue

21020 979



Light Blue

21020 978

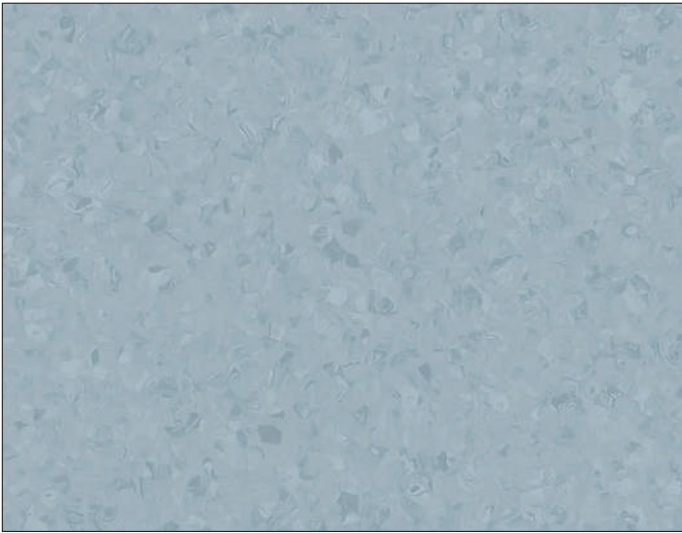


Light Ocean Blue

21020 774



# Eclipse Premium Spirit



Black

21020 707



Medium Warm Beige

21020 973



Light Yellow

21020 786

# Eclipse Premium Spirit




Red

21020 783



Yellow



21020 732

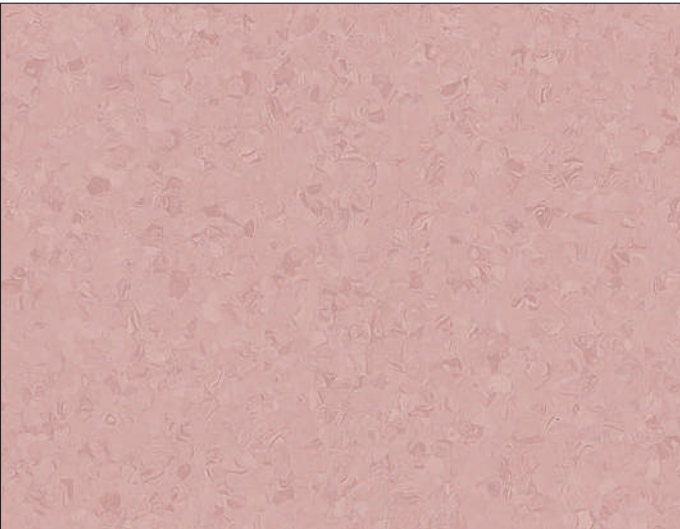

Light Red


21020 781

# Eclipse Premium Spirit

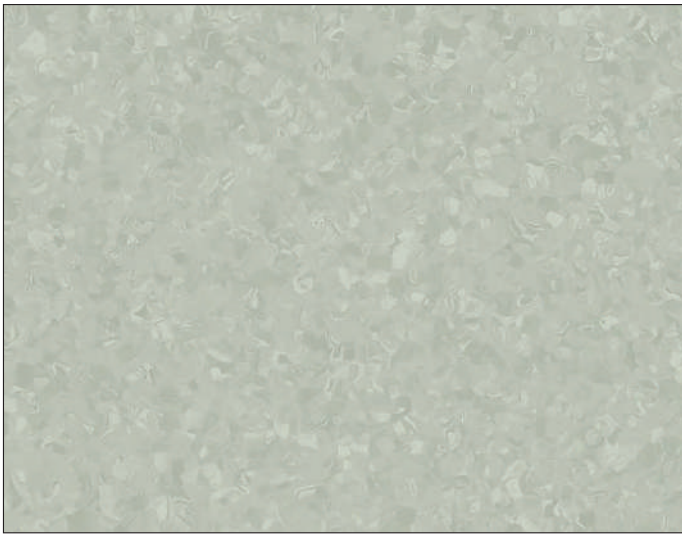


Light Green

21020 975

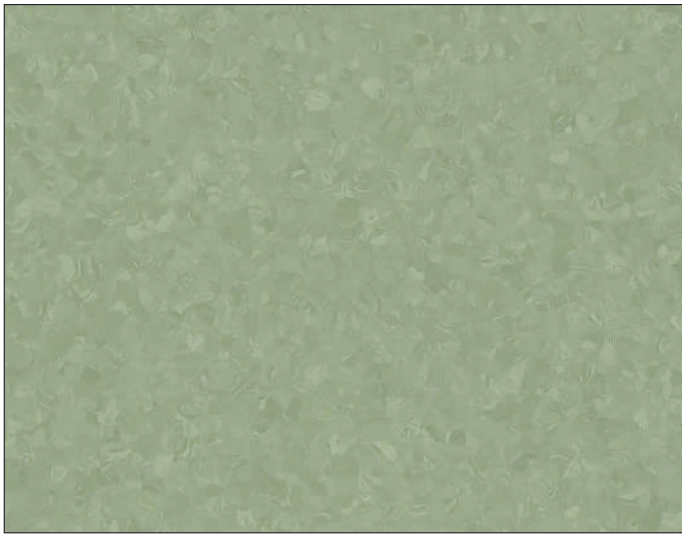


Medium Green

21020 976

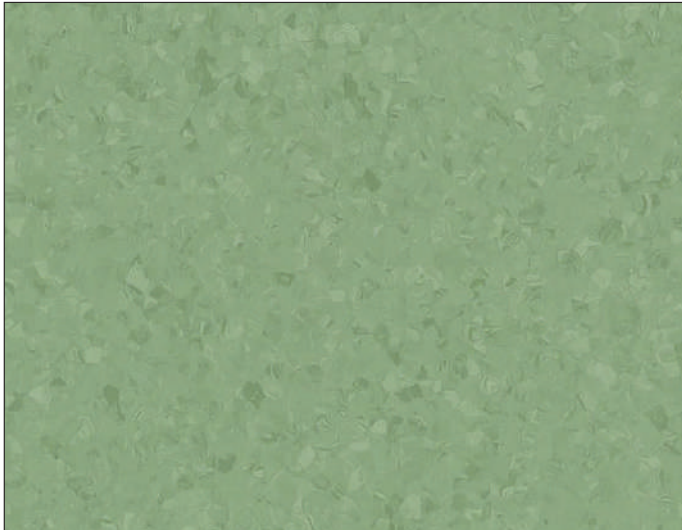


Green

21020 771

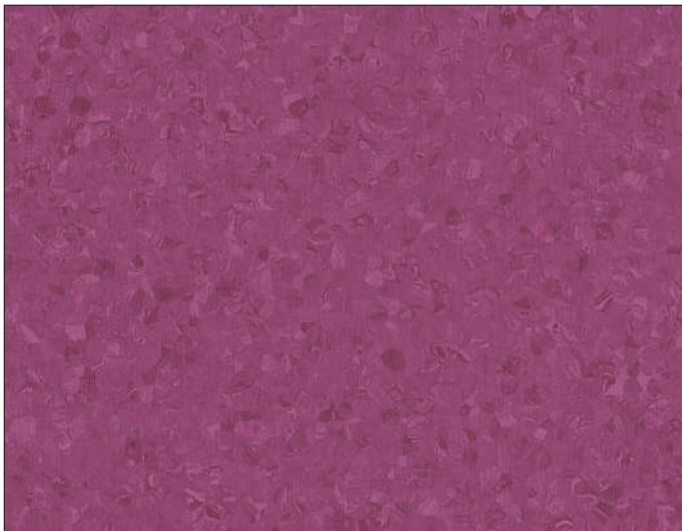


Red Purple

21020 776

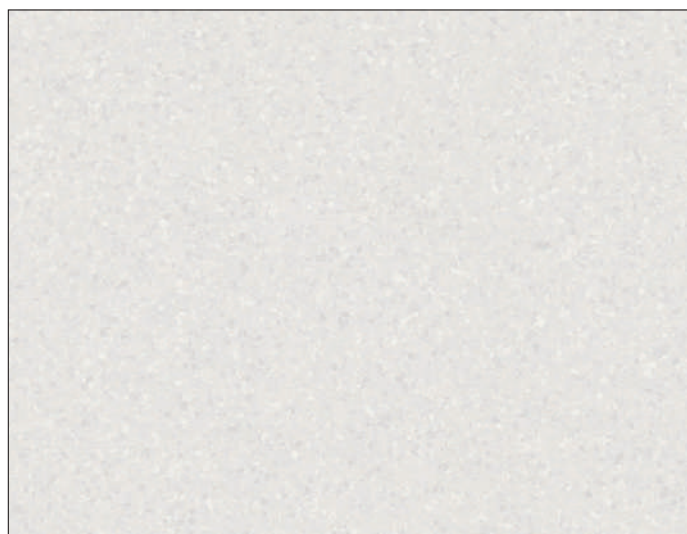


Light Pure Grey

21020 **963**

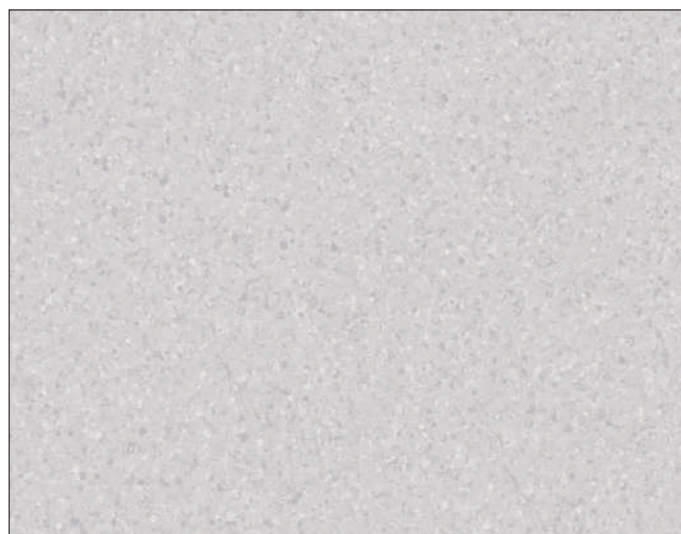


Medium Pure Grey

21020 **964**

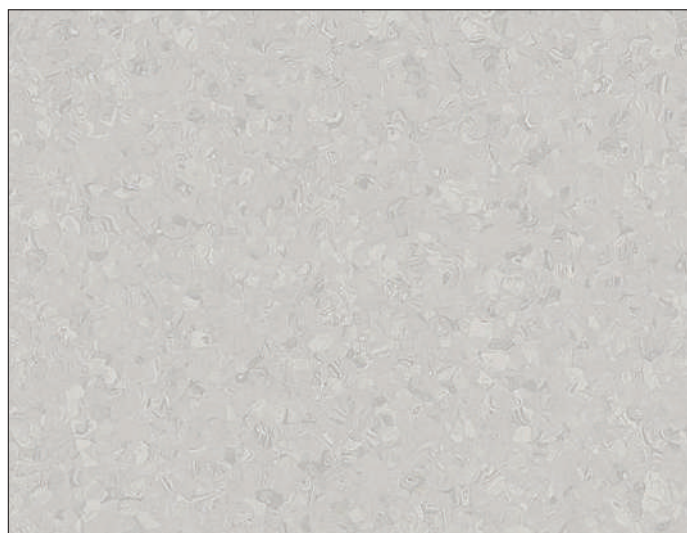

Light Grey

21020 **701**

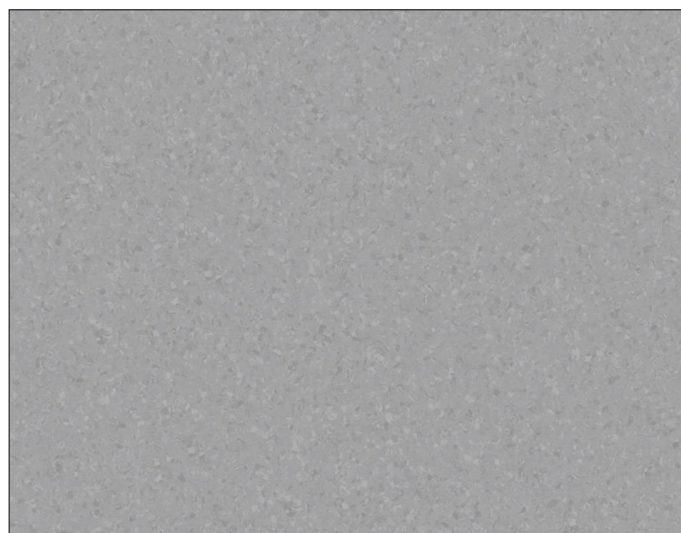

Medium Cool Grey

21020 **967**



Grey

21020 **965**



Dark Cool Grey


21020 **968**

# Eclipse Premium Spirit



Light Beige

21020 **972**

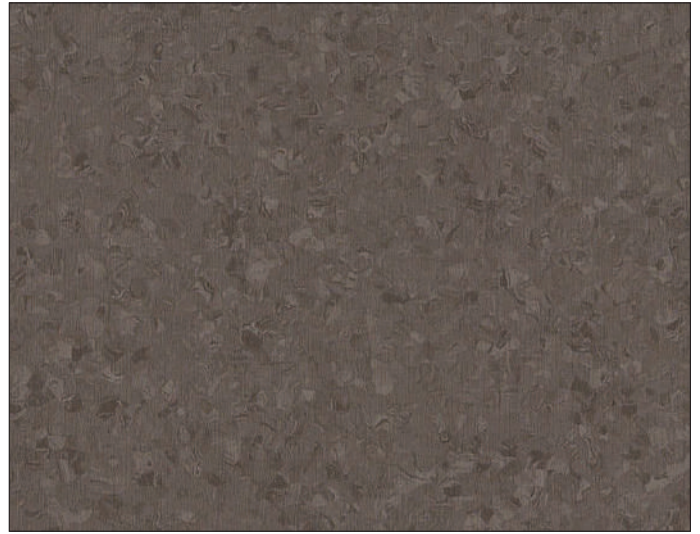

Dark Brown

21020 **725**


## Coordinated Welding rods

Colours	Colour Code	Welding Rods Multicolours
Light Grey	21020701	1290 356
Black	21020707	1290 390
Dark Brown	21020725	1290 309
Yellow	21020732	1290 166
Green	21020771	1290 396
Light Ocean Blue	21020774	1290 398
Midnight Blue	21020775	1290 399
Red Purple	21020776	1290 400
Light Red	21020781	1290 401
Red	21020783	1290 402
Light Yellow	21020786	1290 405
Light Pure Grey	21020963	1290 214
Medium Pure Grey	21020964	1290 167
Grey	21020965	1290 168
Medium Cool Grey	21020967	1290 237
Dark Cool Grey	21020968	1290 171
Light Cool Beige	21020969	1290 172
Medium Cool Beige	21020970	1290 200
Light Beige	21020972	1290 128
Medium Warm Beige	21020973	1290 174
Light Green	21020975	1290 176
Medium Green	21020976	1290 177
Light Blue	21020978	1290 211
Medium Blue	21020979	1290 205



Light Cool Beige

21020 **969**

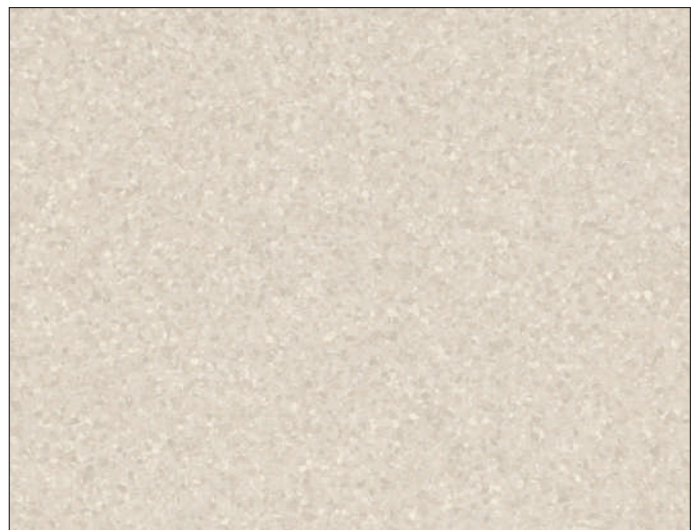

Medium Cool Beige

21020 **970**

# Eclipse Premium Spirit

TECHNICAL DATA	STANDARD	ECLIPSE PREMIUM SPIRIT
<b>CLASSIFICATION</b>		
Classification	ISO 10581 EN ISO 10874	Homogeneous vinyl flooring 34-43
Wear layer binder content	ISO 10581	Type I
<b>TECHNICAL CHARACTERISTICS</b>		
Total thickness	EN ISO 24346	2.0 mm
Total weight	EN ISO 23997	3000 g/m <sup>2</sup>
Surface treatment		PUR reinforced
Form of delivery	EN ISO 24341 Sheet (rolls)	Approx. 23 m x 200 cm art. no. 21020 _ _ _
<b>PERFORMANCE FOR CE MARKING REQUIREMENTS (EN 14041)</b>		
Declaration of Performance	EN 14041	0019-0020-DoP-2013-07
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B <sub>fl</sub> -S1 ≥ 8 kW/m <sup>2</sup> Pass
Electrostatic properties	EN 1815	< 2 kV
Thermal resistance	EN 12667/DIN 52612	Approx. 0.01 m <sup>2</sup> K/W
Slip resistance	EN 13893 BS 7976-2	≥ 0.3 Low risk of slip
<b>TECHNICAL PERFORMANCES</b>		
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.10 mm Average measured value: 0.03 mm
Slip resistance	DIN 51130	R9
Clean room test	ASTM F24 F51	Class A
Ease of decontamination	ISO 8690	Good
Bacteria resistance	EN ISO 846: Part C	Does not favour growth
Chemical resistance	ISO 26987	Good resistance
Castor Chair	ISO 4918	Suitable
Flexibility	ISO 24344	Pass
Dimensional stability	EN ISO 23999	≤ 0.40% for rolls
Light fastness	EN ISO 105-B02	≥ 6
Seam strength	EN 684	Individual values : ≥ 400 N/50 mm
Underfloor heating		Suitable - max. 27°C
<b>ENVIRONMENTAL PERFORMANCES</b>		
Total VOC emissions	ISO 16000-9 Indoor air quality	≤ 10µg/m <sup>3</sup> (after 28 days) Platinum
<b>COLOURS</b>		
24		

The above information is subject to modification for the benefit of further improvement.

Tarkett's instructions regarding installation, cleaning and maintenance should be observed.



Powered by



MADE IN SWEDEN

