



ESSENTIALS  
300+

NEW  
GENERATION  
FLOORING



**Oak / White**  
**4m - 5510107**



Oak / Dark Beige  
4m - 5510038





Oak / Brown  
4m - 6635088





Oak / Dark  
4m - 5510108



Charm Oak / Natural  
4m - 6635096





Charm Oak / Light Brown  
4m - 6635097





Authentic / Beige  
4m - 5510128





Authentic / Natural  
4m - 5510129



Bruxelles / Brule  
4m - 6635063





**Faro / Middle Grey**  
**4m - 5510110**



**Trend Oak / Snowwhite**  
**4m - 5510115**





**Trend Oak / Grege**  
**4m - 5510113**



Trend Oak / Light Natural  
4m - 5510114





Soft Elm / Grey  
4m - 5510105



Soft Elm / Natural  
4m - 5510106





Soft Elm / Brown  
4m - 5510039



Biscay / Dark Natural  
4m - 6635093





Biscay / Dark  
4m - 5510026



Castle / Clair  
4m - 6635002





Castle / Etuve  
4m - 6635032



**Beech / Light Natural**  
**4m - 5510071**






**Forest Gris / Beige**  
4m - 6635078



Forest / Natural  
4m - 6635072



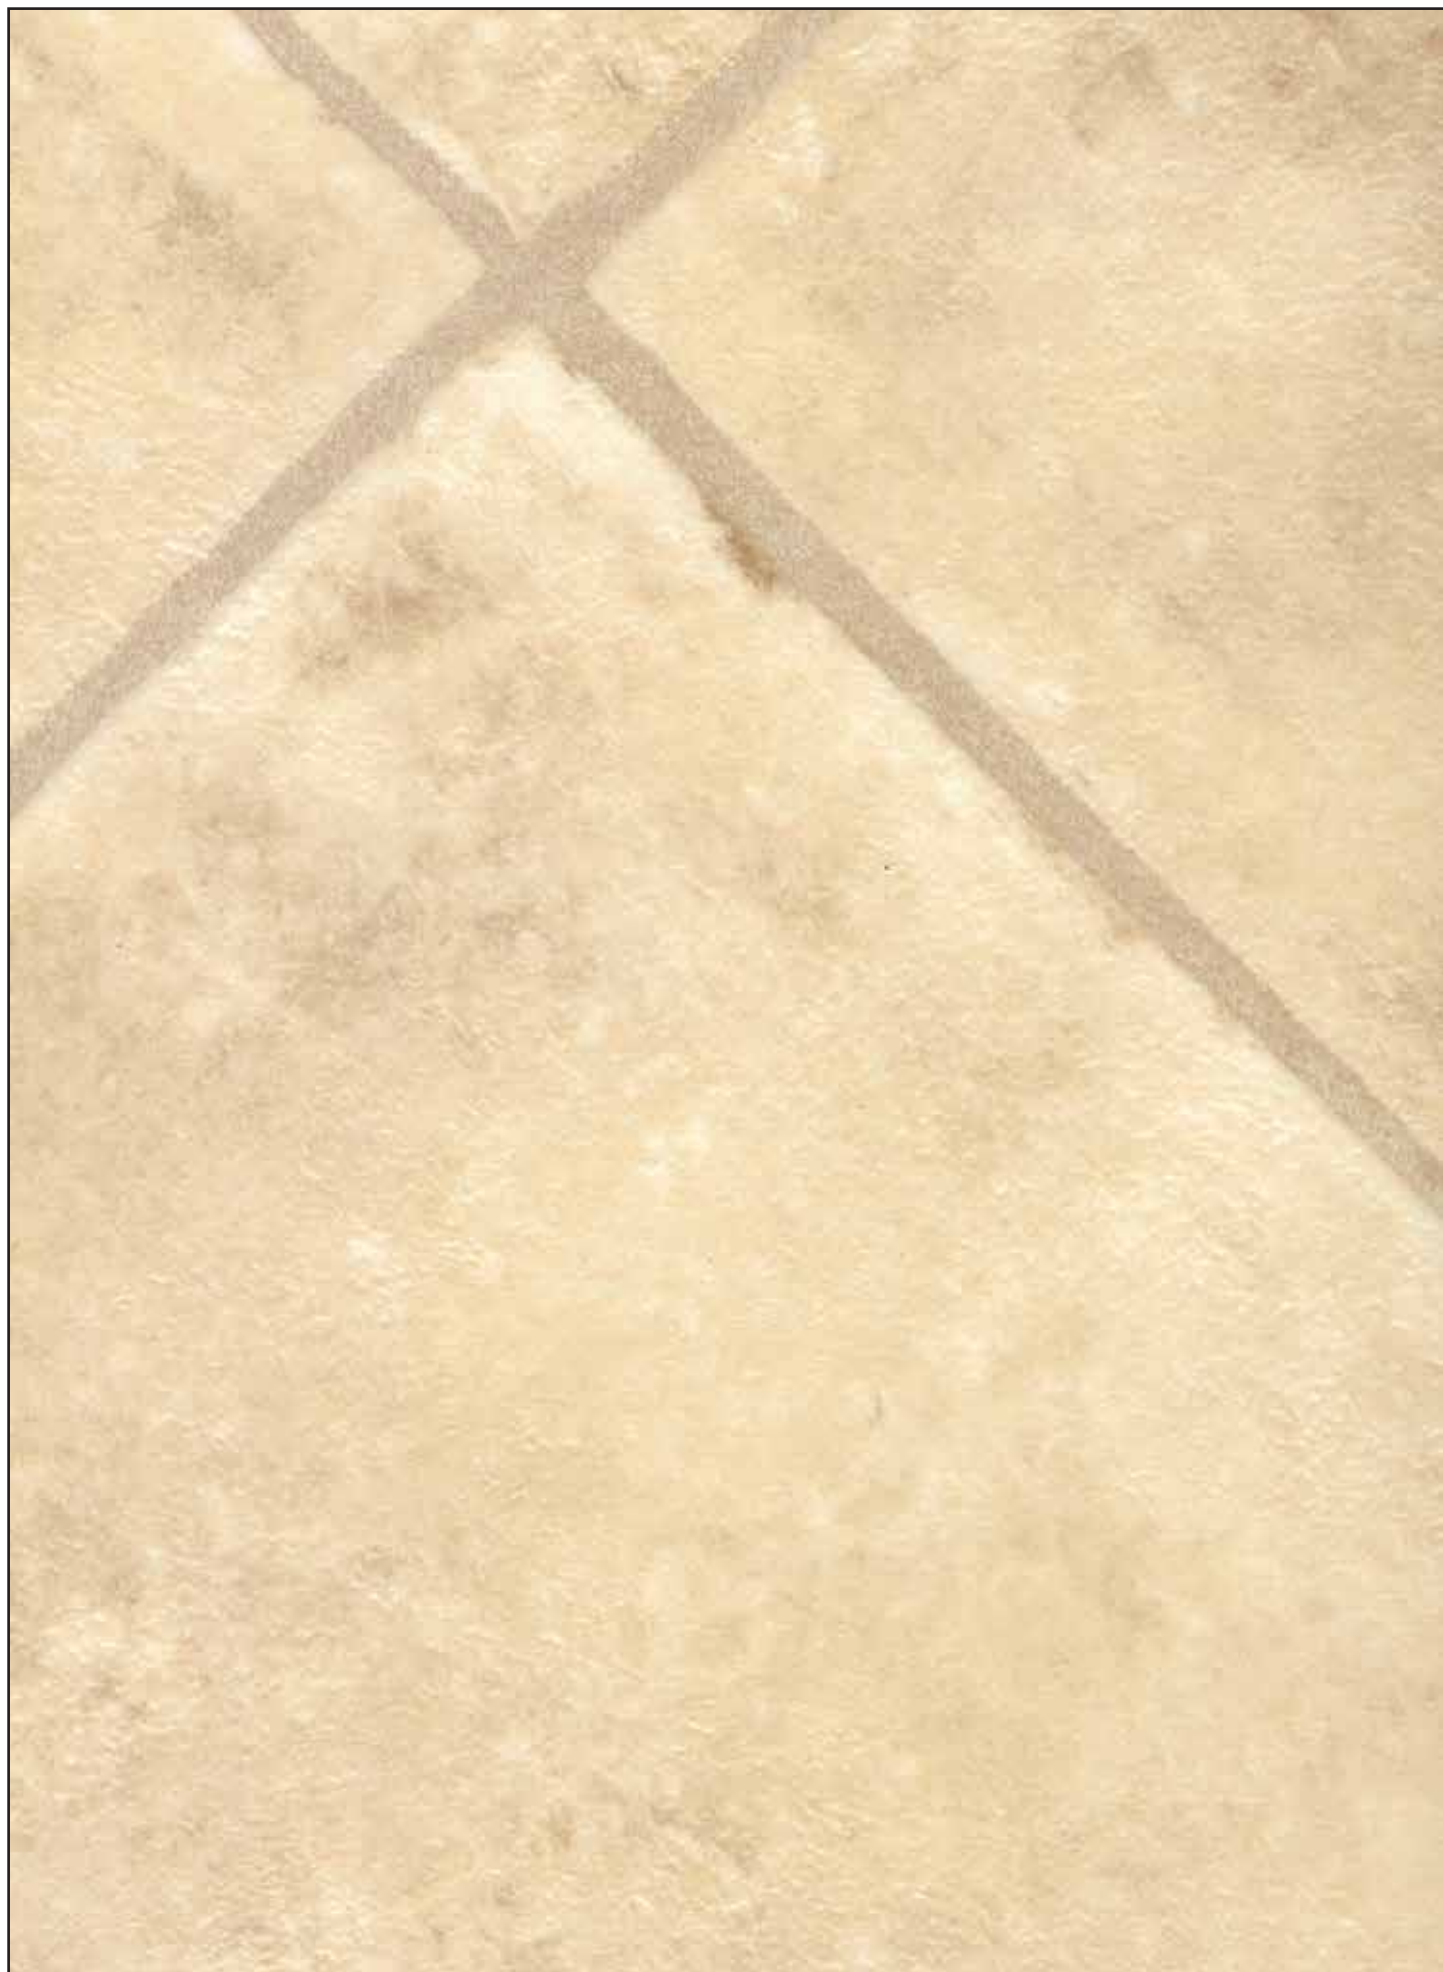

**Bellagio / Grege**  
**4m - 5510118**



Antia / Black  
4m - 5611003



# Vinyl Collection

## ESSENTIALS

### 300+



suitable for



|        |         |             |                     |         |          |            |
|--------|---------|-------------|---------------------|---------|----------|------------|
|        |         |             |                     |         |          |            |
| EN 426 | EN 434  | ISO 105/B02 | Chemical resistance | EN 1815 | EN 660-2 | Recyclable |
| 4      | ≤ 0.40% | ≥ 6         | OK                  | ≤ 2Kv   | T        | OK         |



|                                 |                                |             |             |                |            |             |                     |           |        |           |             |
|---------------------------------|--------------------------------|-------------|-------------|----------------|------------|-------------|---------------------|-----------|--------|-----------|-------------|
|                                 |                                |             |             |                |            |             |                     |           |        |           |             |
| EN 685 Class of use Residential | EN 685 Class of use Commercial | EN 428 (mm) | EN 429 (mm) | EN 430 (kg/m²) | EN 426 (m) | EN 433 (mm) | EN 13501-1          | ISO 717/2 | EN 425 | DIN 51130 | EN 12524    |
|                                 |                                | ca. 3.00    | ca. 0.35    | ca. 2.170      | ca. 25     | ≤ 0.20      | C <sub>fl</sub> -S1 | ca. 19 dB | OK     | R10       | 0.05 m² K/W |

Essentials 300+ - SWATCH 01 - 5510 63 1400  
Although the utmost care is taken, the data here given could be imprecise and liable to modifications of a technical nature. In its strive to improve its floor solutions, Tarkett reserves the right to modify their technical specifications, colours and materials at any moment and without prior notice.



# Tarkett

