



**New!**

Fabric  
Concept



**<100 µg/m³\***

**Better Indoor  
Air Quality**

\*TVOC AT 28 DAYS

**PTHALATE  
FREE  
Technology**



**EXCLUSIVE**


**200**

Collection

**NEW  
GENERATION  
FLOORING**


\*except recycled content



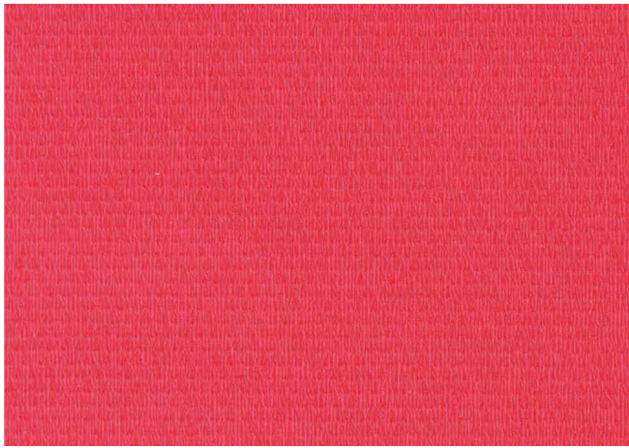


Cherry

27036010

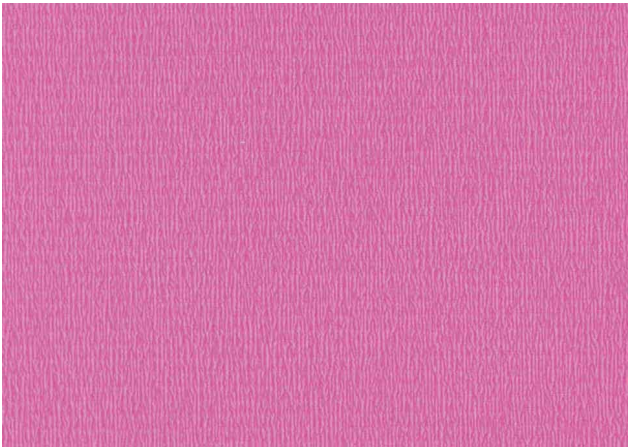


Geranium

27036009

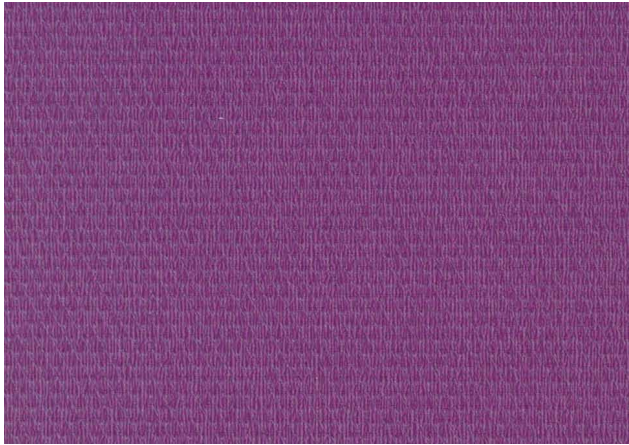


Lavender

27036008

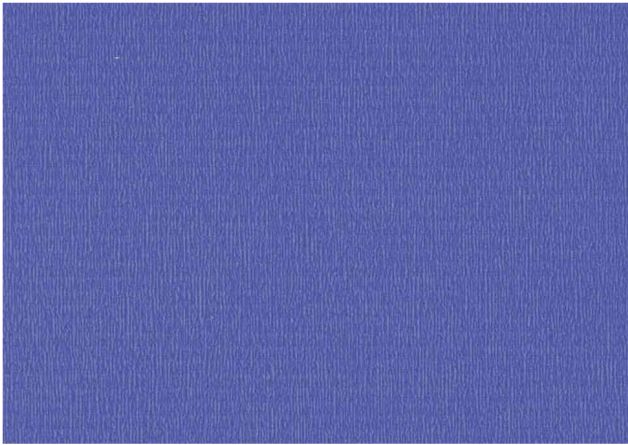


Marine

27036013

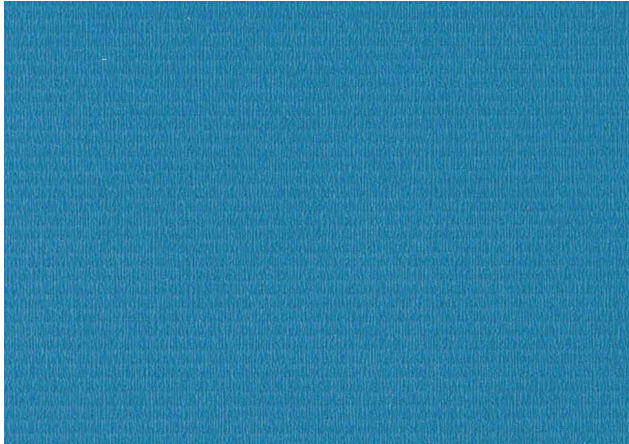


Aqua

27036012

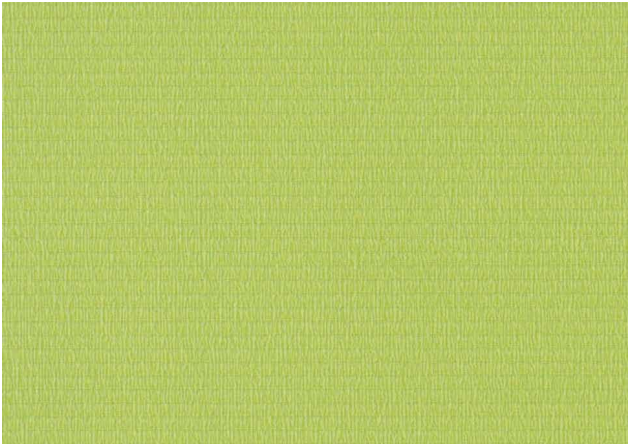

Lime


27036011

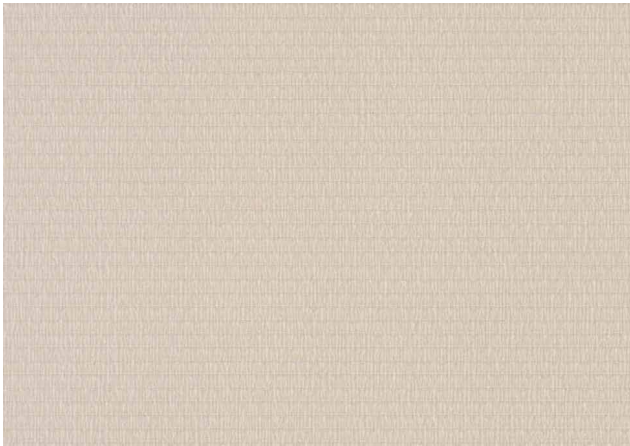

Cream


27036006



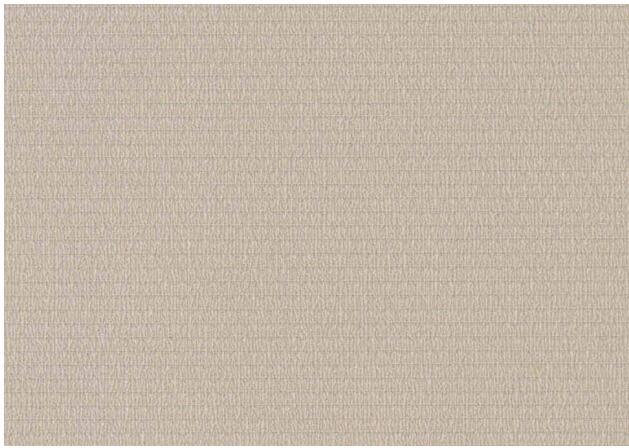


Beige

27036003

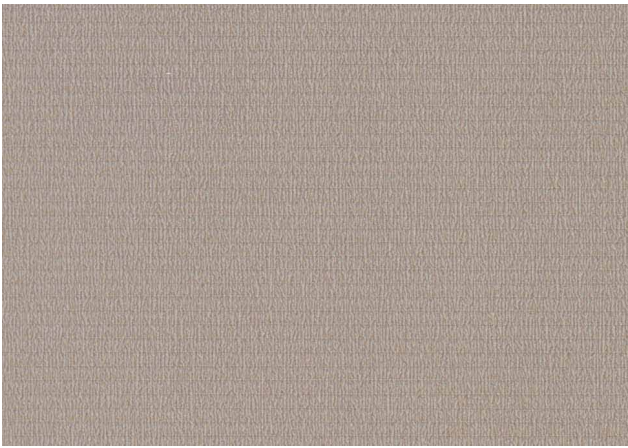


Fawn

27036005

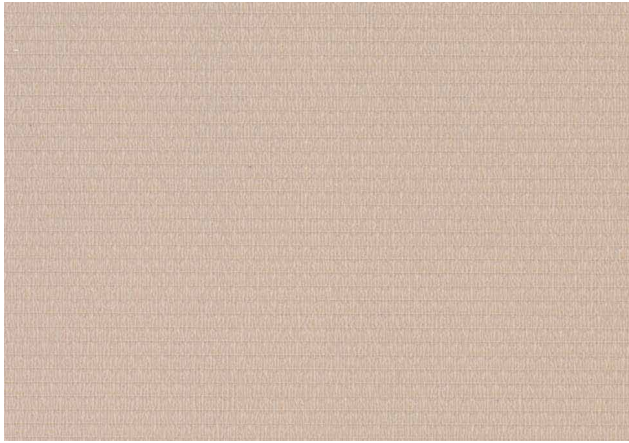

Camel

27036004

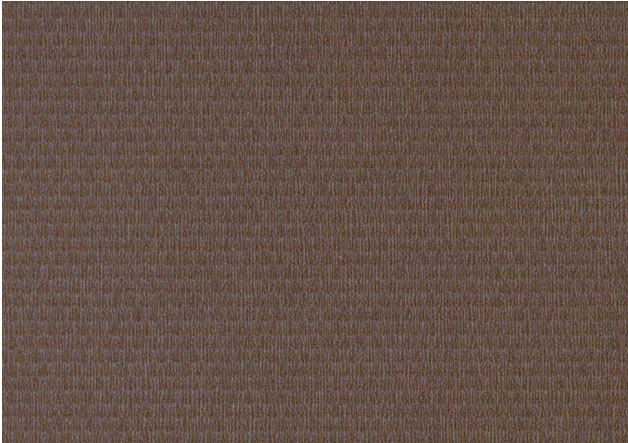

Chocolate

27036007




Snow

27036000



Smoke

27036002

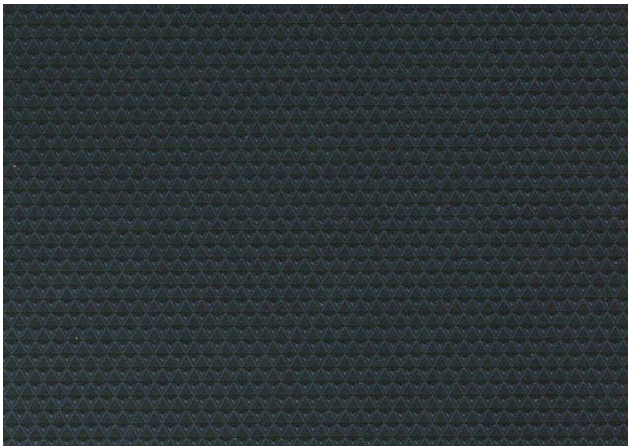

Charcoal

27036001




Vinyl Collection

**EXCLUSIVE  
200**

- Improved indoor environment and air quality
- Trendy designs
- Easy installation and maintenance

- *Extremely resistant to wear and tear*
- *Unique new technic mechanical embossing over rainbow colours rendering just like a polo knit!*



|           |         |             |                     |         |          |            |
|-----------|---------|-------------|---------------------|---------|----------|------------|
|           |         |             |                     |         |          |            |
| EN 426    | EN 434  | ISO 105/B02 | Chemical resistance | EN 1815 | EN 660-2 | Recyclable |
| 4 + 3 + 2 | ≤ 0.40% | ≥ 6         | OK                  | ≤ 2Kv   | T        | OK         |



|                                 |                                |                                |             |             |                |            |             |                     |           |        |           |             |
|---------------------------------|--------------------------------|--------------------------------|-------------|-------------|----------------|------------|-------------|---------------------|-----------|--------|-----------|-------------|
|                                 |                                |                                |             |             |                |            |             |                     |           |        |           |             |
| EN 685 Class of use Residential | EN 685 Class of use Commercial | EN 685 Class of use Industrial | EN 428 (mm) | EN 429 (mm) | EN 430 (kg/m²) | EN 426 (m) | EN 433 (mm) | EN 13501-1          | ISO 717/2 | EN 425 | DIN 51130 | EN 12524    |
|                                 |                                |                                | ca. 2.00    | ca. 0.40    | ca. 2.15       | ca. 25     | ≤ 0.10      | B <sub>s1</sub> -S1 | ca. 13 dB | OK     | R10       | 0.02 m² K/W |

suitable for



Exclusive 200 - FABRIC CONCEPT - 27036 63 000

Although the utmost care is taken, the data here given could be imprecise and liable to modifications of a technical nature. In its strive to improve its floor solutions, Tarkett reserves the right to modify their technical specifications, colours and materials at any moment and without prior notice.

