



New!

Elegance  
Concept

EXCLUSIVE

370

Collection

PHTHALATE  
FREE  
Technology



\*except recycled content

NEW  
GENERATION  
FLOORING





Warm Oak / Warm Beige  
4m - 27014003



Warm Oak / Light Natural  
4m - 27014010



Warm Oak / Natural  
4m - 27014009



Warm Oak / Warm Brown  
4m - 27014008



Warm Oak / Dark Brown  
4m - 27014006



Warm Oak / Brown  
4m - 27014007



**Warm Oak / Light Grey**  
**4m - 27014011**



Warm Oak / Grege  
4m - 27014012



Warm Oak / Dark Grey  
4m - 27014004



Warm Oak / Black  
4m - 27014005



Charm Oak / Warm Brown  
4m - 27014016



Charm Oak / Medium Beige  
4m - 27014017



Charm Oak / Natural  
4m - 27014015




**Charm Oak / Grege**  
**4m - 5214125**



Charm Oak / Grey  
4m - 5214123



Charm Oak / Dark Brown  
4m - 27014018

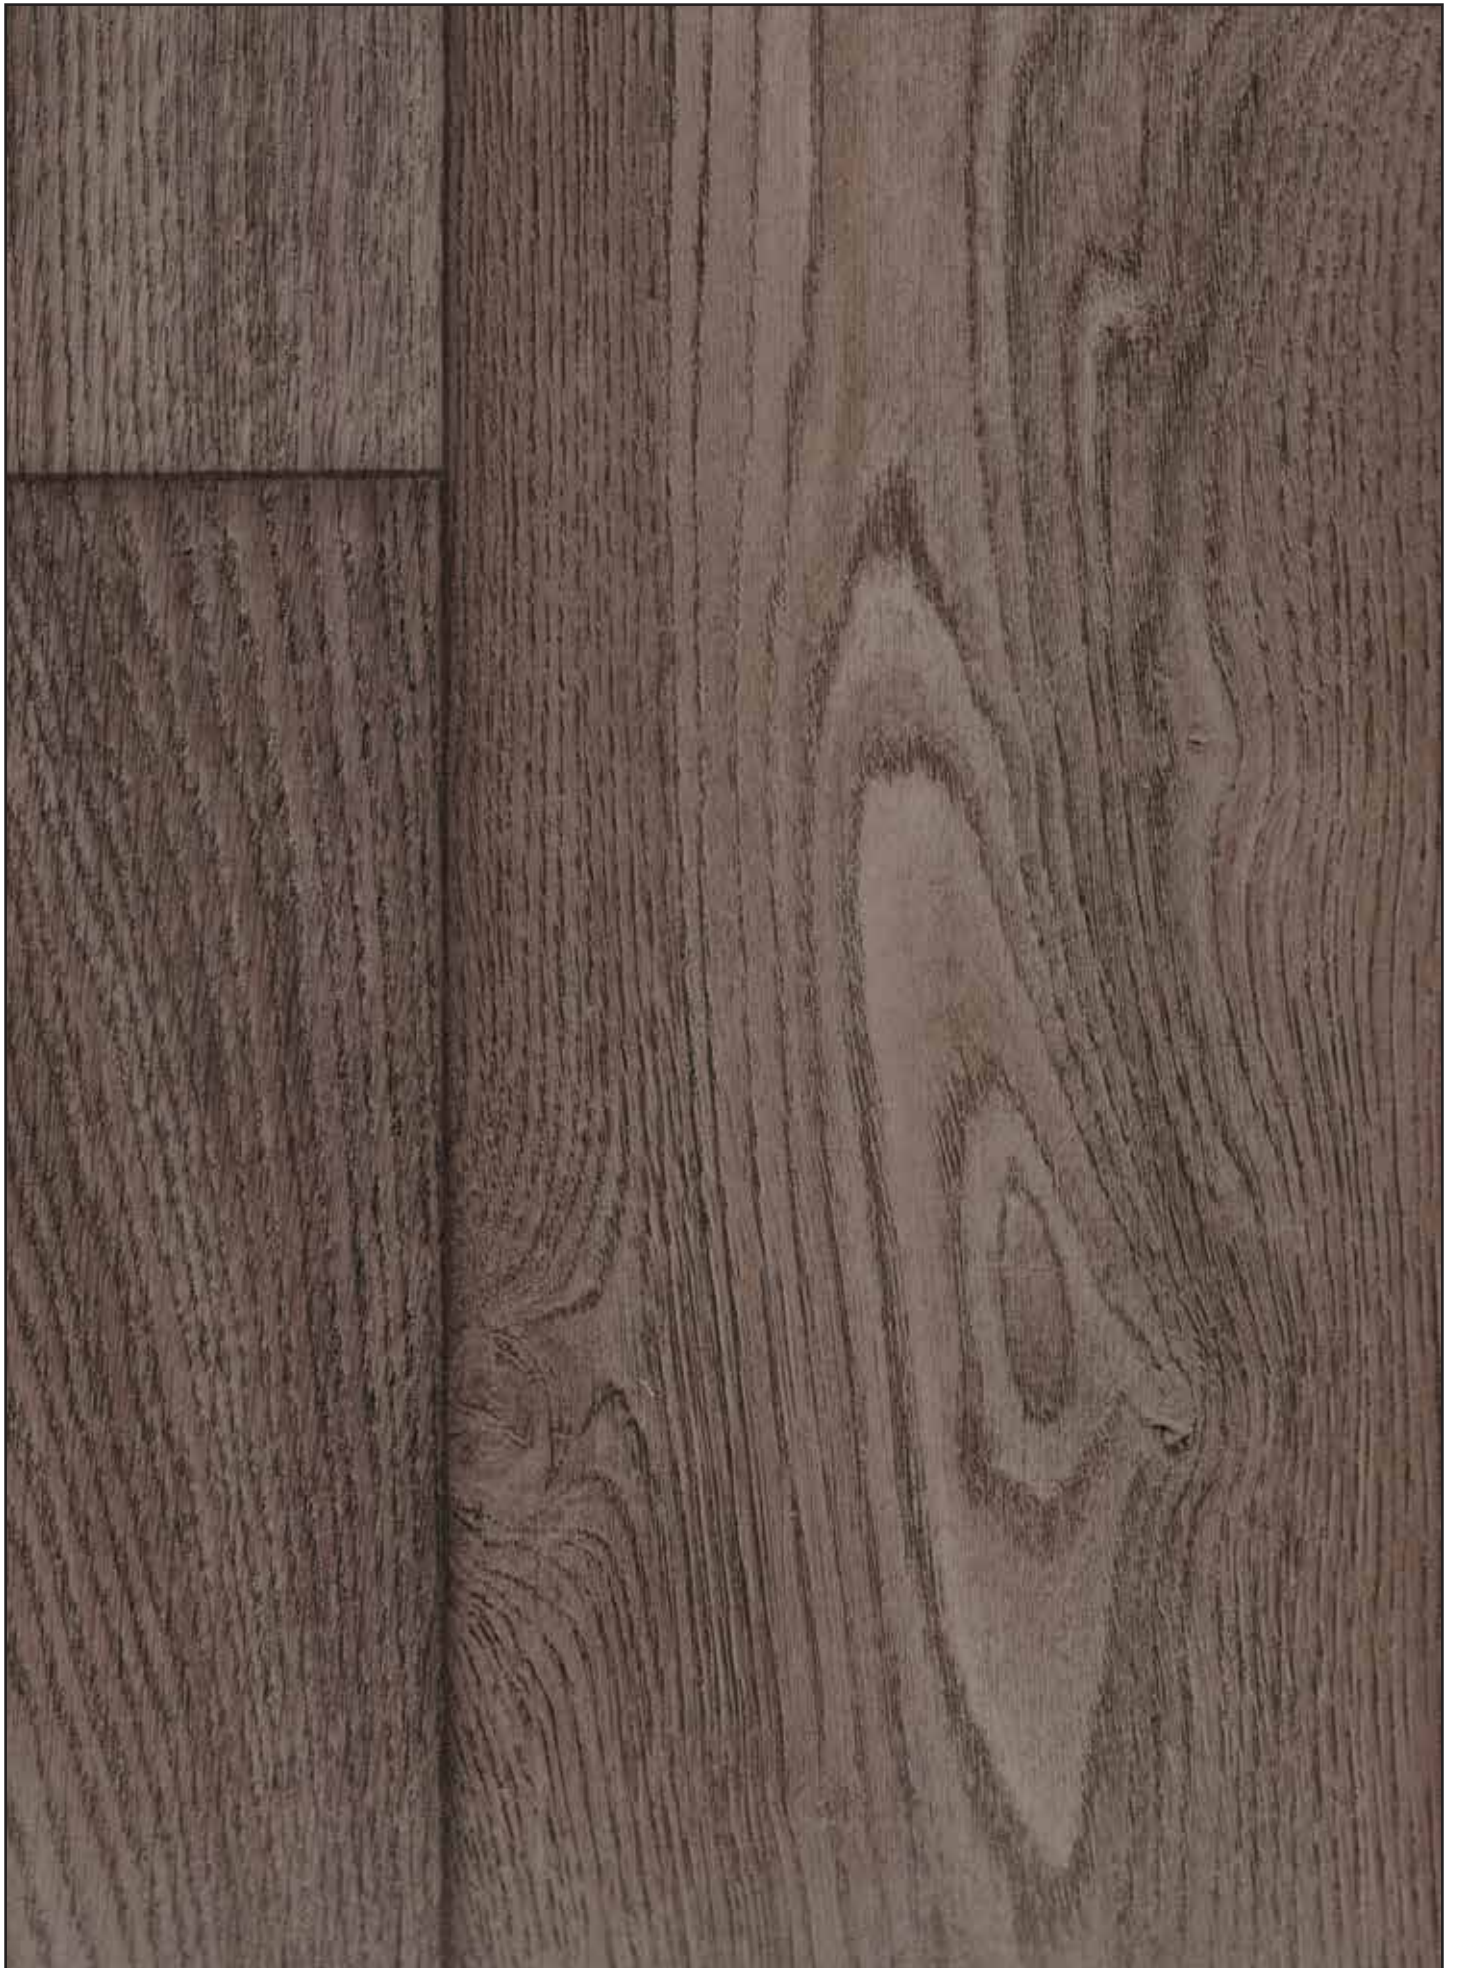

Charm Oak / Dark Grey  
4m - 27014014



Charm Oak / Anthracite  
4m - 27014013



Soft ELM / Medium Natural  
4m - 27014022




Soft ELM / Light Brown  
4m - 27014023




Soft ELM / Grey  
4m - 27014025



Soft ELM / Dark Brown  
4m - 27014026

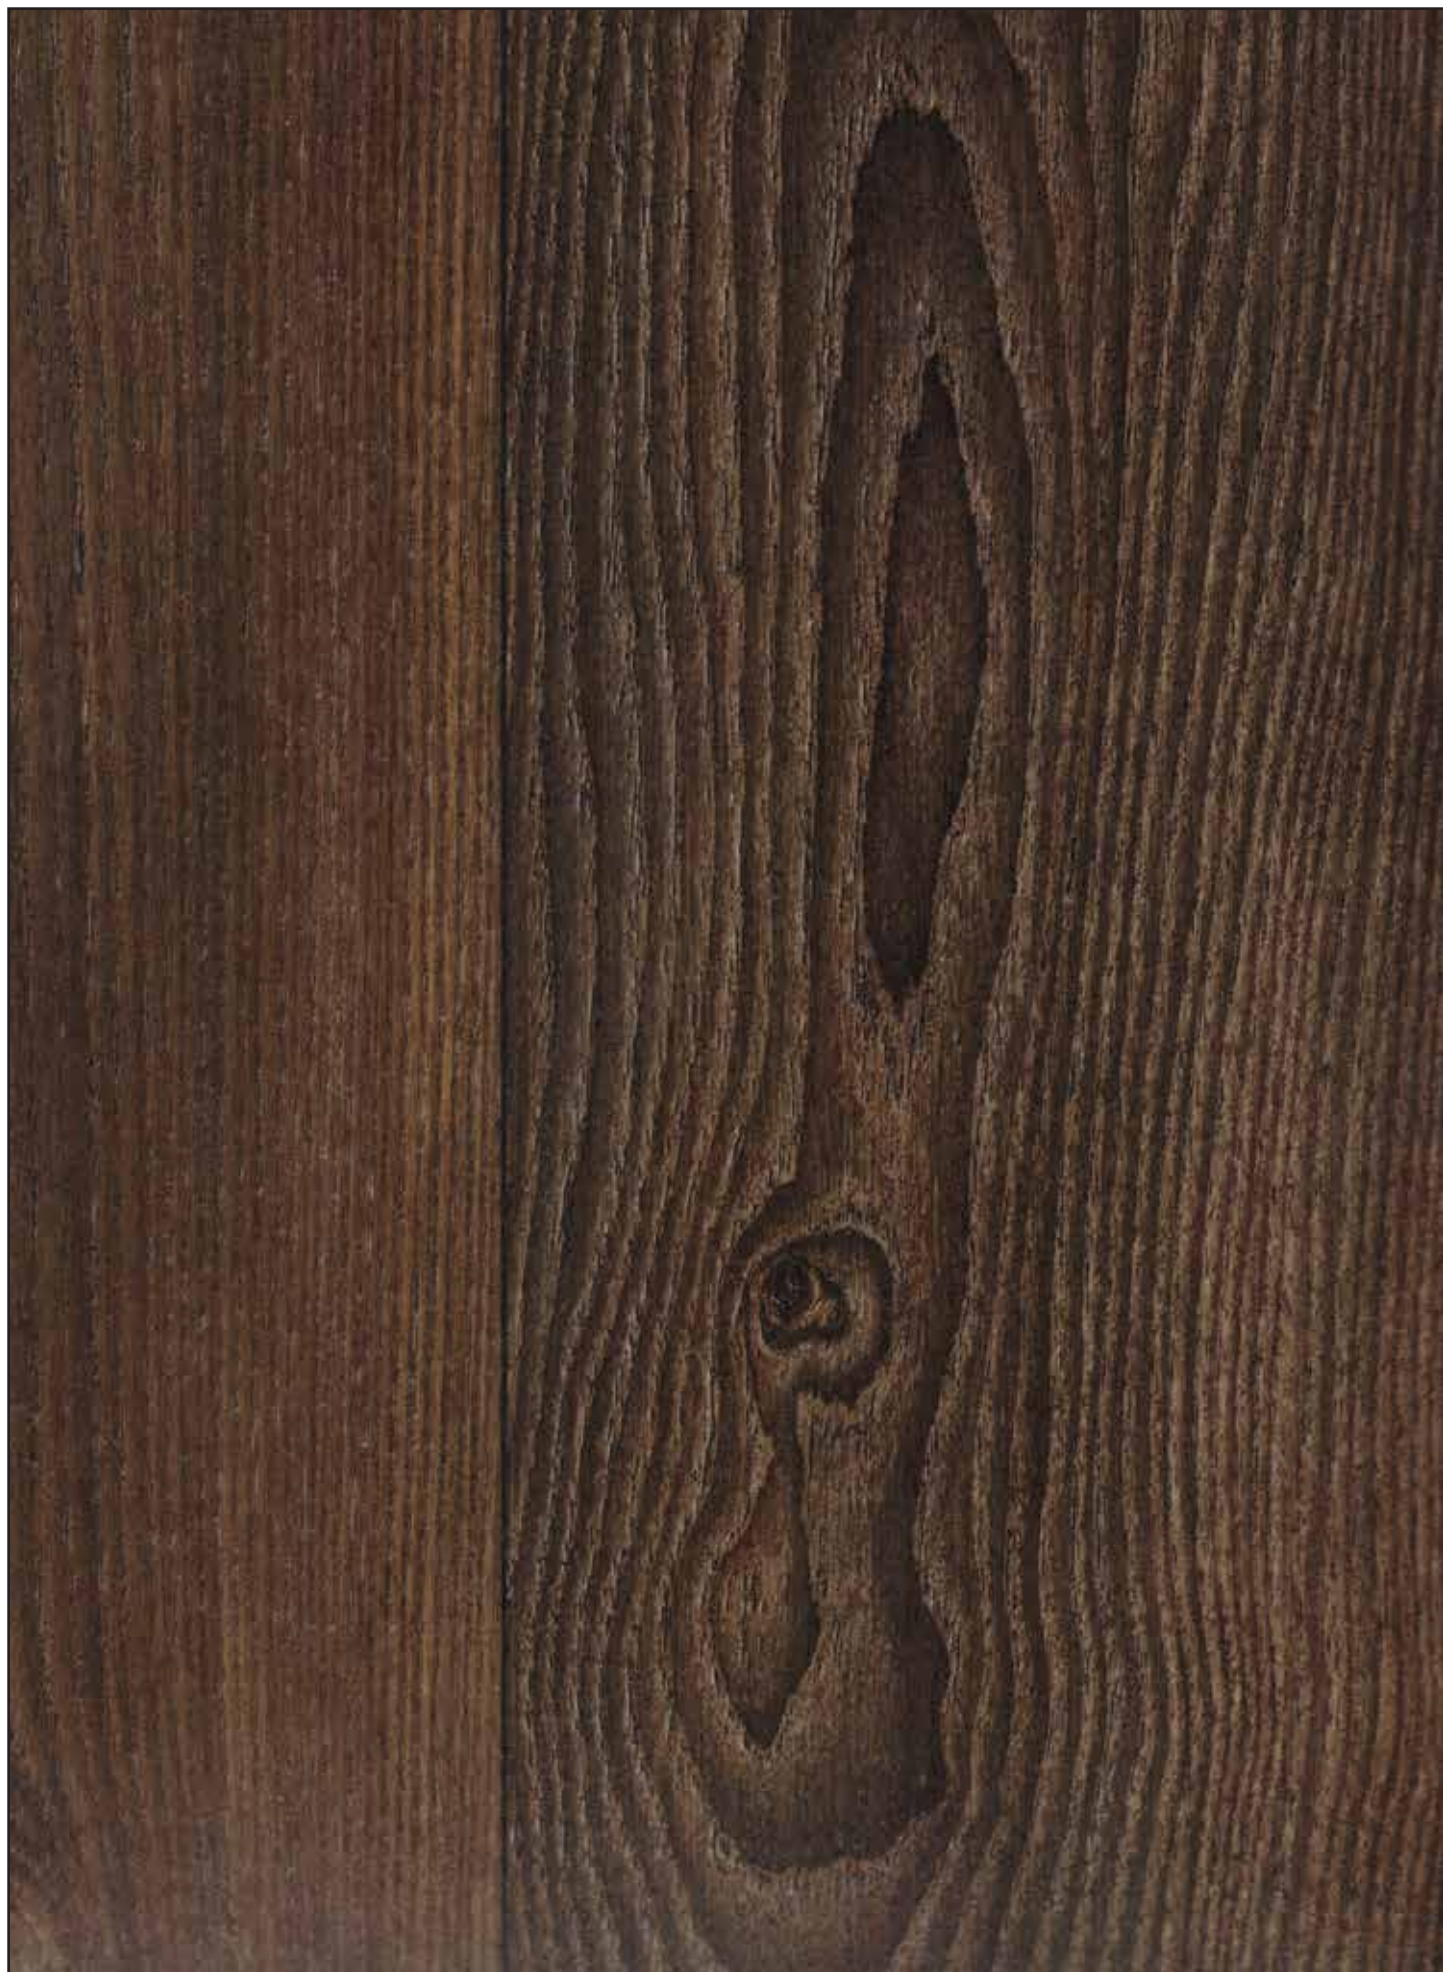


Soft ELM / Brown  
4m - 27014024

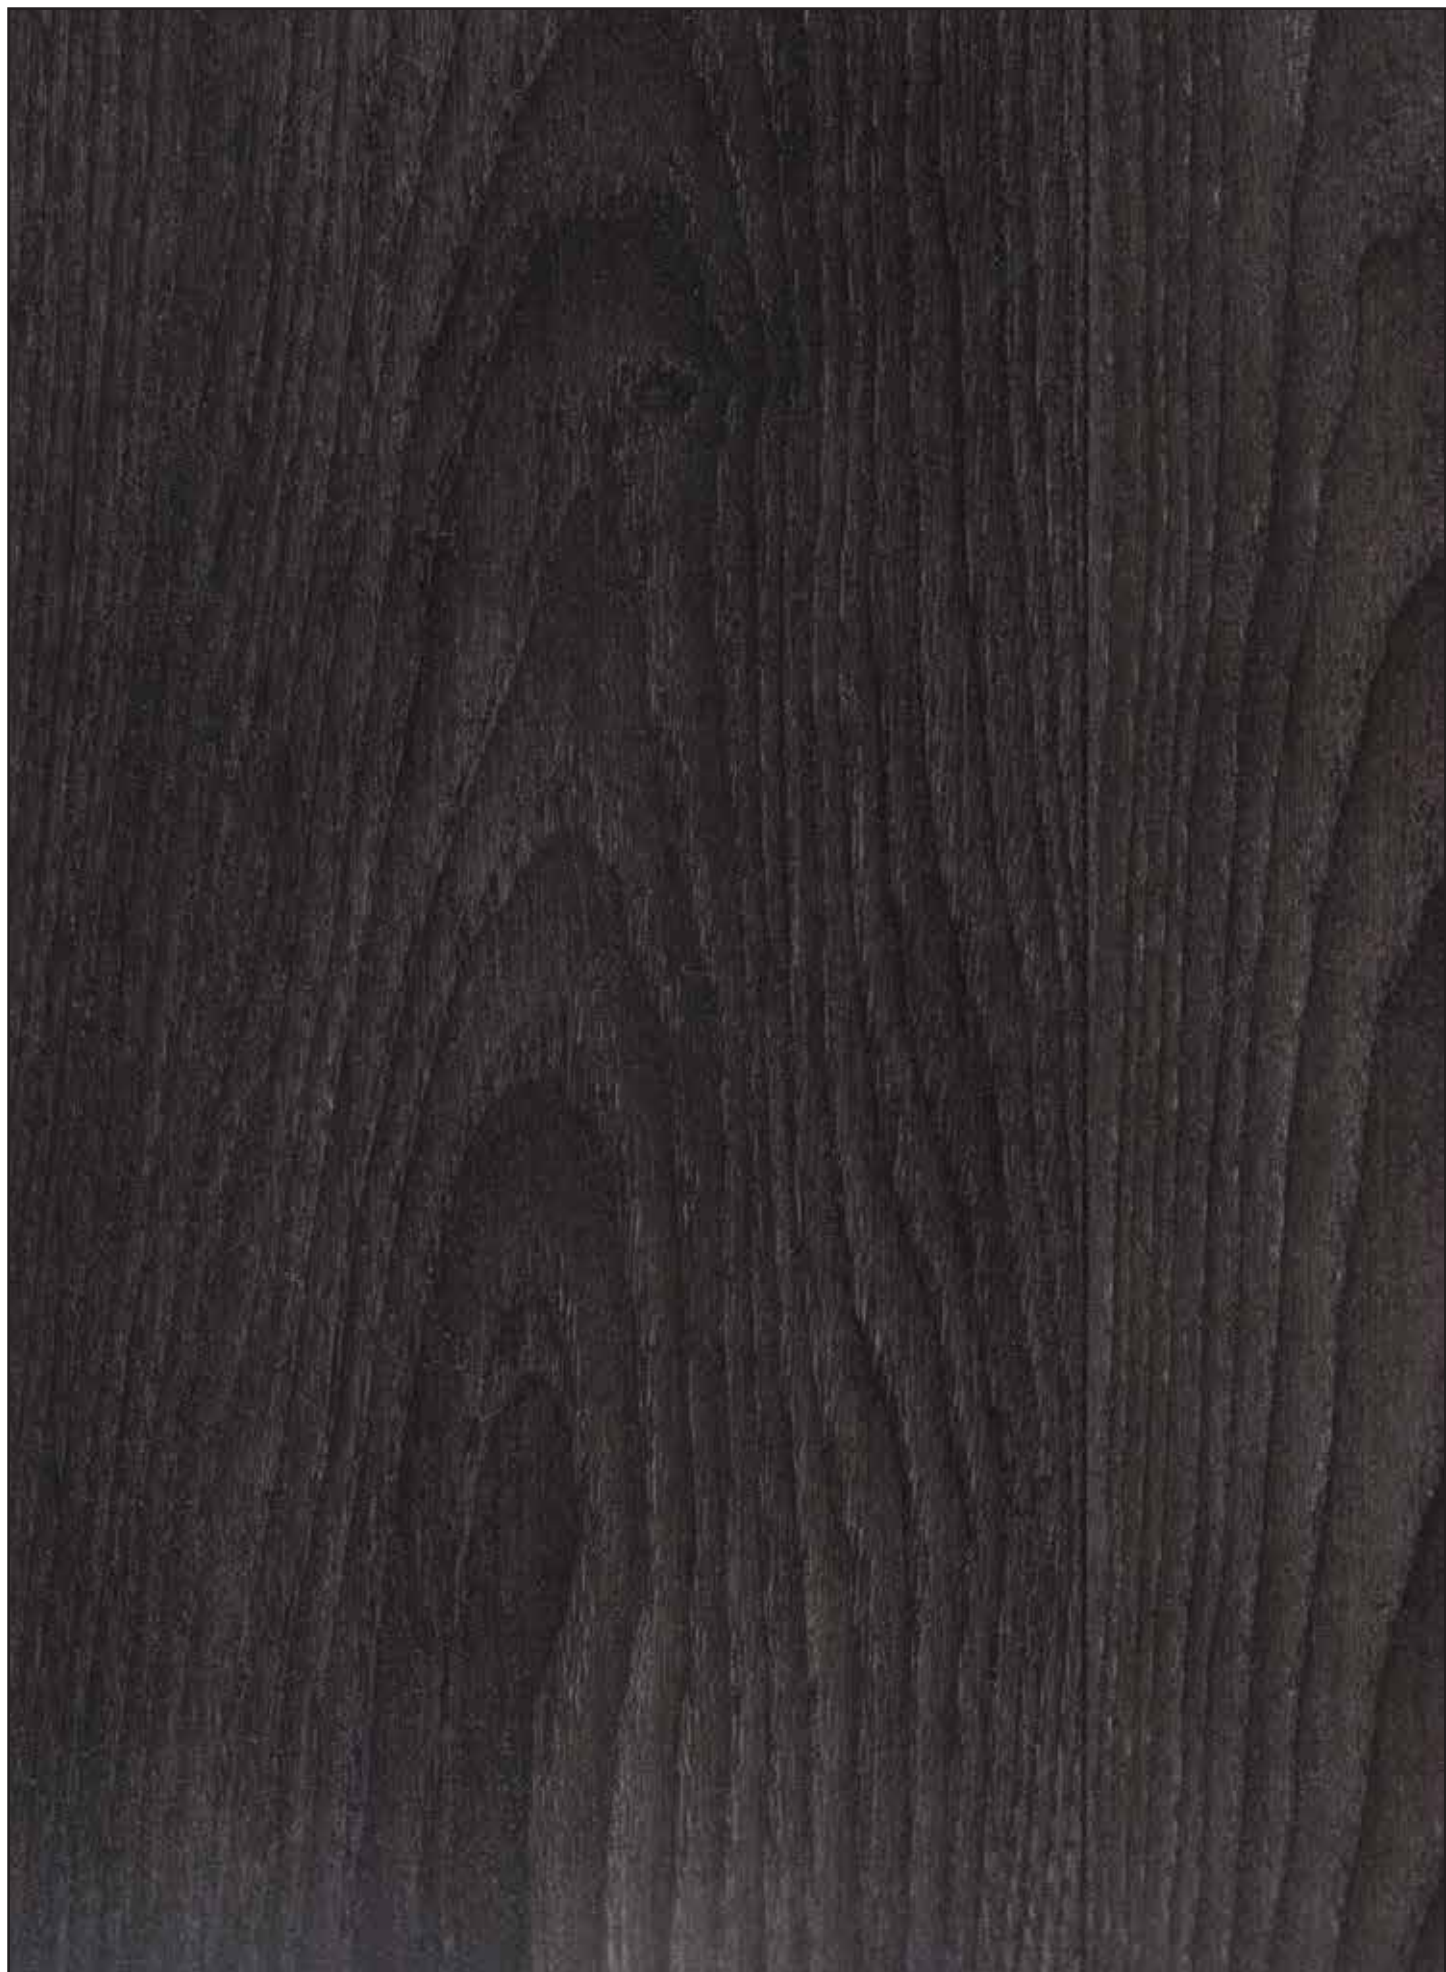

Soft ELM / Black  
4m - 27014021



Smart Walnut / Natural  
4m - 27014001

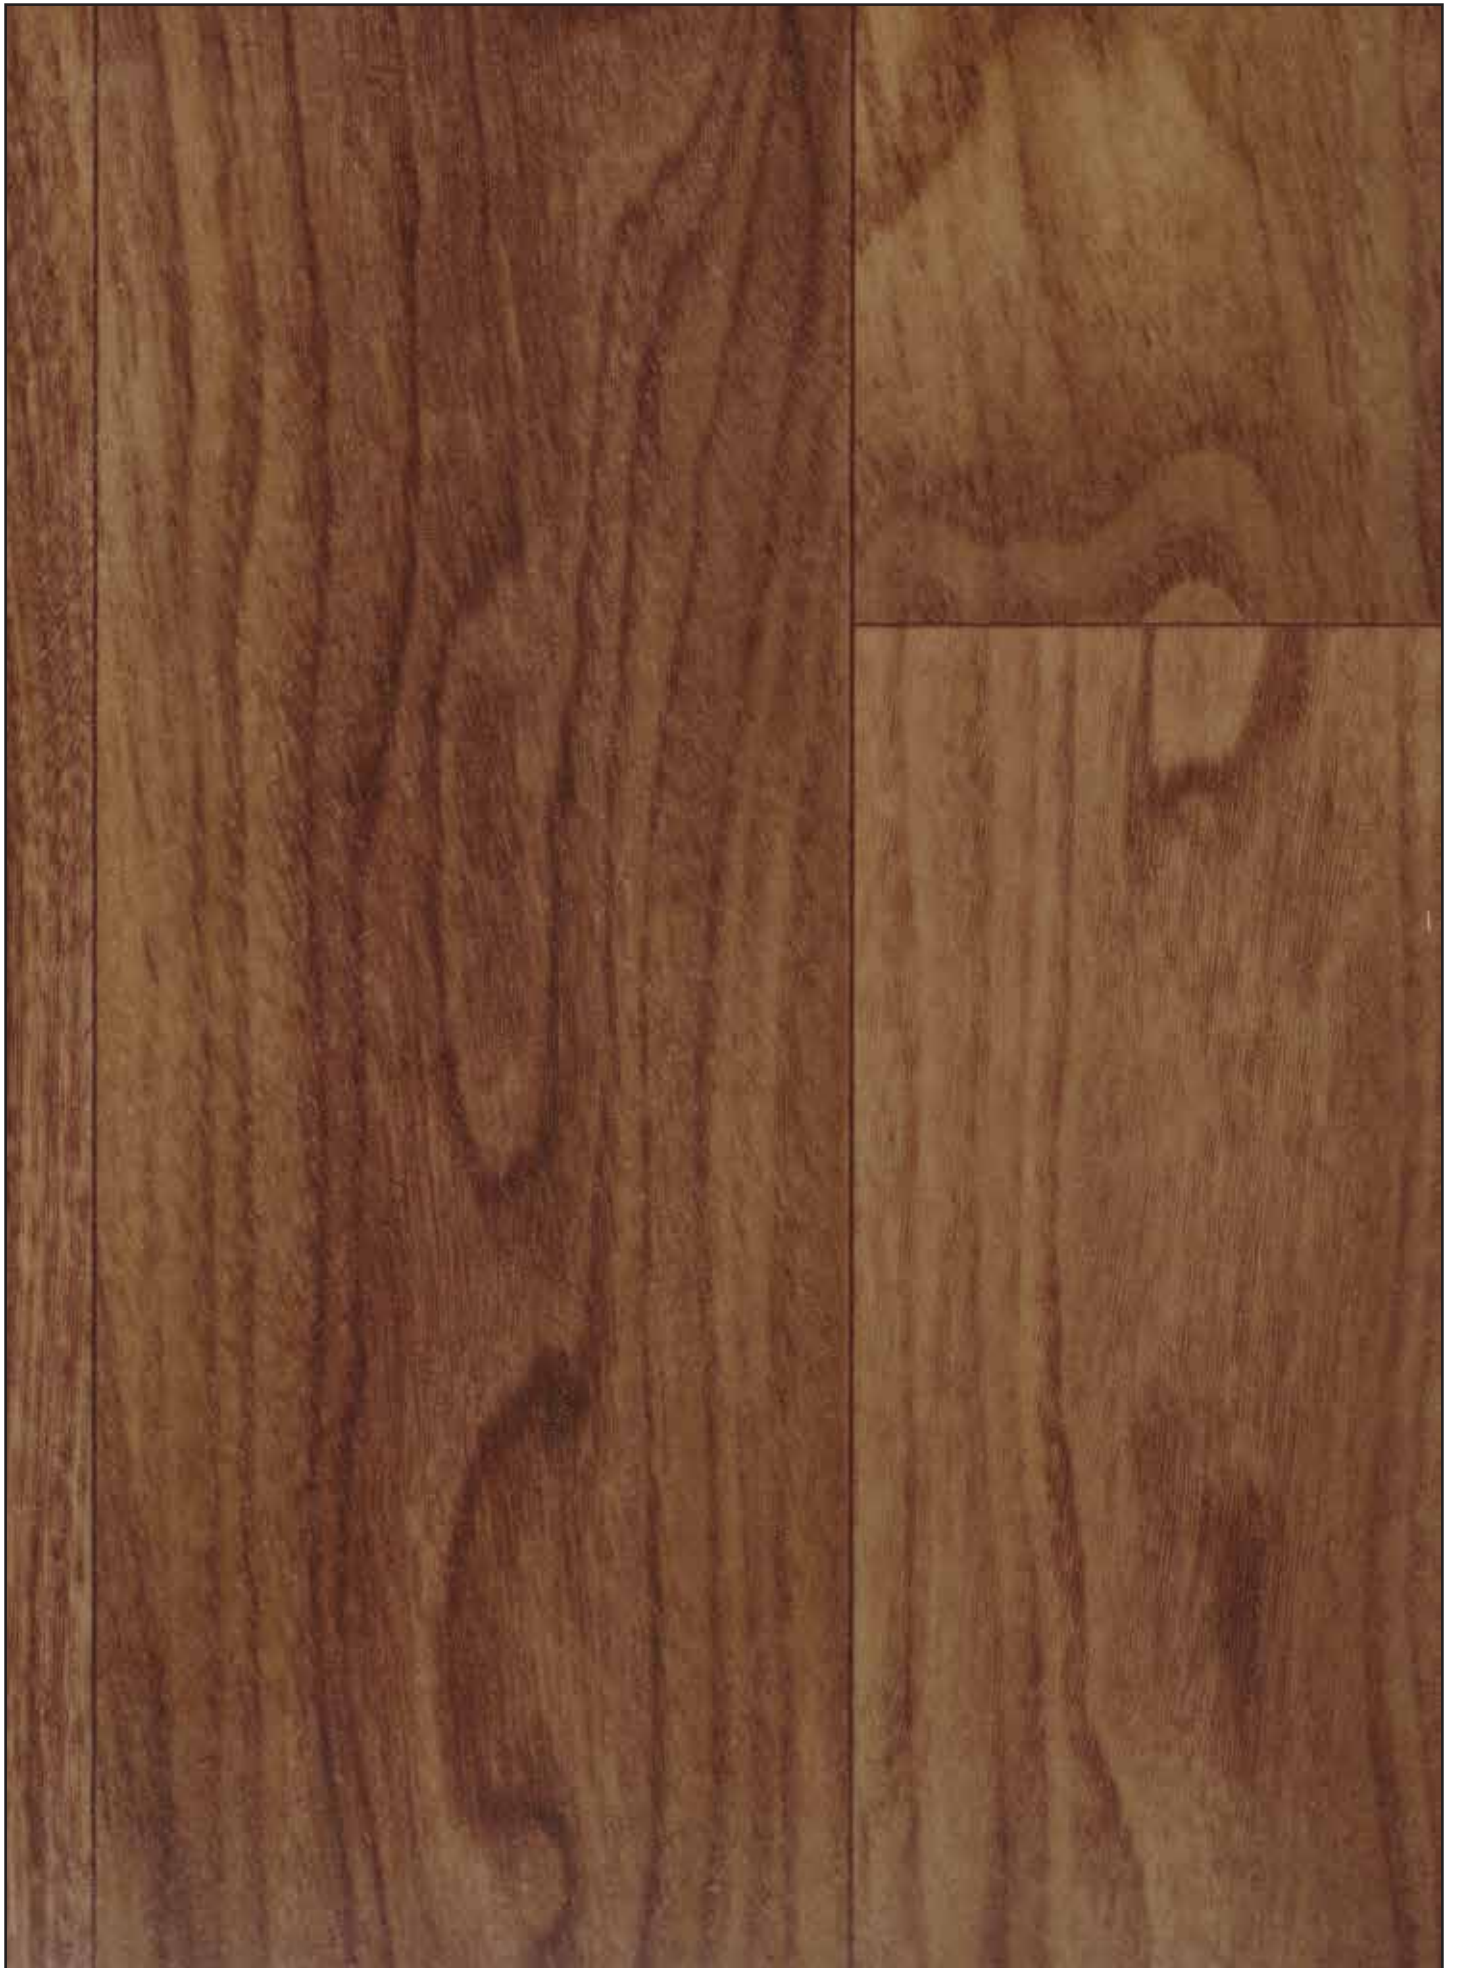

Smart Walnut / Brown  
4m - 27014002


Vinyl Collection

**EXCLUSIVE  
370**

- › Improved indoor environment and air quality
- › Trendy designs
- › Easy installation and maintenance

- *Extremely resistant to wear, tear and indentation*
- *Woods in dark and deep colours for a masculine touch*

**TIMELESS  
CLASSIC**



**Creative  
Lab**



*Natural  
Care*



**Smart  
Generation**



|           |         |             |                     |         |          |            |
|-----------|---------|-------------|---------------------|---------|----------|------------|
|           |         |             |                     |         |          |            |
| EN 426    | EN 434  | ISO 105/B02 | Chemical resistance | EN 1815 | EN 660-2 | Recyclable |
| 4 + 3 + 2 | ≤ 0.40% | ≥ 6         | OK                  | ≤ 2Kv   | T        | OK         |



|                                 |                                |             |             |                |            |             |                     |           |        |           |             |
|---------------------------------|--------------------------------|-------------|-------------|----------------|------------|-------------|---------------------|-----------|--------|-----------|-------------|
|                                 |                                |             |             |                |            |             |                     |           |        |           |             |
| EN 685 Class of use Residential | EN 685 Class of use Commercial | EN 428 (mm) | EN 429 (mm) | EN 430 (kg/m²) | EN 426 (m) | EN 433 (mm) | EN 13501-1          | ISO 717/2 | EN 425 | DIN 51130 | EN 12524    |
|                                 |                                | ca. 3.70    | ca. 0.35    | ca. 2.70       | ca. 24     | ≤ 0.20      | C <sub>fl</sub> -S1 | ca. 17 dB | OK     | R10       | 0.06 m² K/W |

suitable for



Exclusive 370 - ELEGANCE CONCEPT - 27015 63 000  
Although the utmost care is taken, the data here given could be imprecise and liable to modifications of a technical nature. In its strive to improve its floor solutions, Tarkett reserves the right to modify their technical specifications, colours and materials at any moment and without prior notice.

